

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2018/04/12
2	ECR220421001	TIM	2022/04/21

SPECIFICATION:

1. Current Rating: 4A
2. Voltage Rating: 250V
3. Waterproof: IPX7
4. Operating temperature range: -40°C~+85°C

NOTE:

Applicable Cable Outer Diameter: $\phi 5.0$ to $\phi 7.0$ mm

11	NUT B	Aluminium alloy, Nickel plating
10	GLAND CAGE	POM, White
9	GLAND	Silicone, Black
8	BODY	Aluminium alloy, Nickel plating
7	CONTACT	Brass, Gold plating over Nickel
6	O-RING B	Silicone, Black
5	SHELL	Aluminium alloy, Nickel plating
4	EPOXY	EPOXY
3	NUT A	Aluminium alloy, Nickel plating
2	O-RING A	EPDM, Black
1	HOUSING	PBT, UL94V-0, Black
NO	PART NAME	DESCRIPTION

UNLESS OTHERWISE SPECIFIED TOLERANCE

UNIT:	DECIMAL	LINEAR	ANGLES
mm	X.	± 0.50	$\pm 5^\circ$
	X.X	± 0.25	$\pm 3^\circ$
	X.XX	± 0.12	$\pm 1^\circ$




WWW.ATTEND.COM.TW


DRAWN	Tim	2018/04/12	DRAWN NAME:
CHECKED	Fros	2018/04/12	M12 A- Code Plug for Cable 4 Pin Female For Field Installable
APPROVED	Ken	2018/04/12	PRODUCT NO. 216A-04FF0
	SCALE 2/1	SHEET 1/1	SIZE A4
			FILE NAME 216A-04FF0_B_2

REV.	DESCRIPTION	DRAWN	DATE
------	-------------	-------	------


1. Pre-assembled

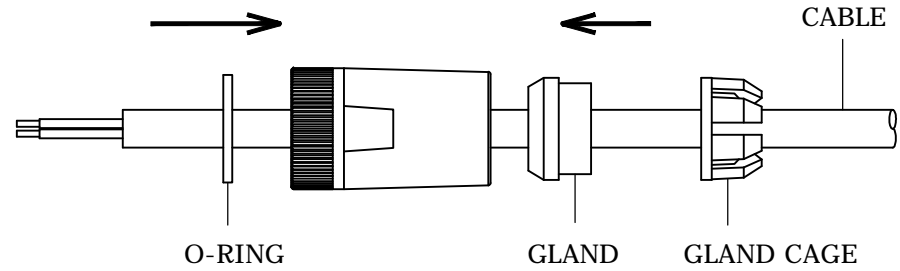


2. Wire Processing

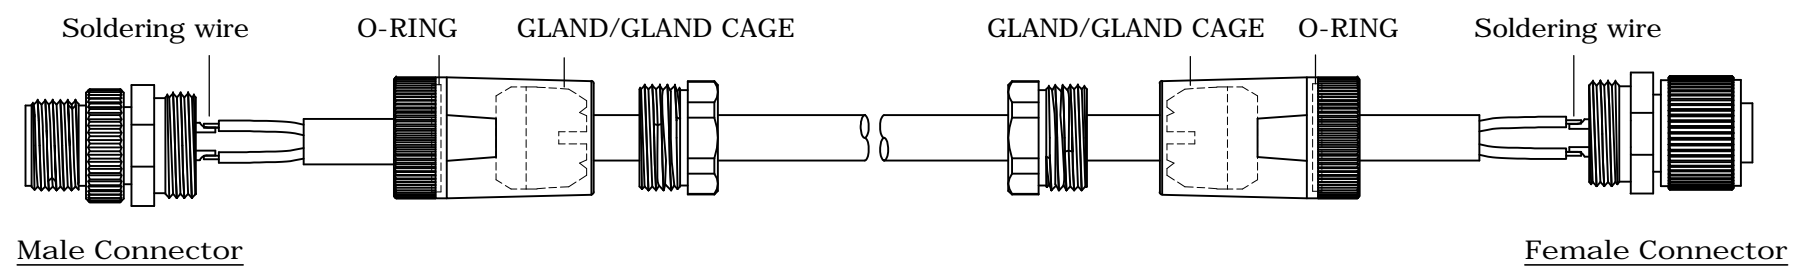



3. Setting Connector

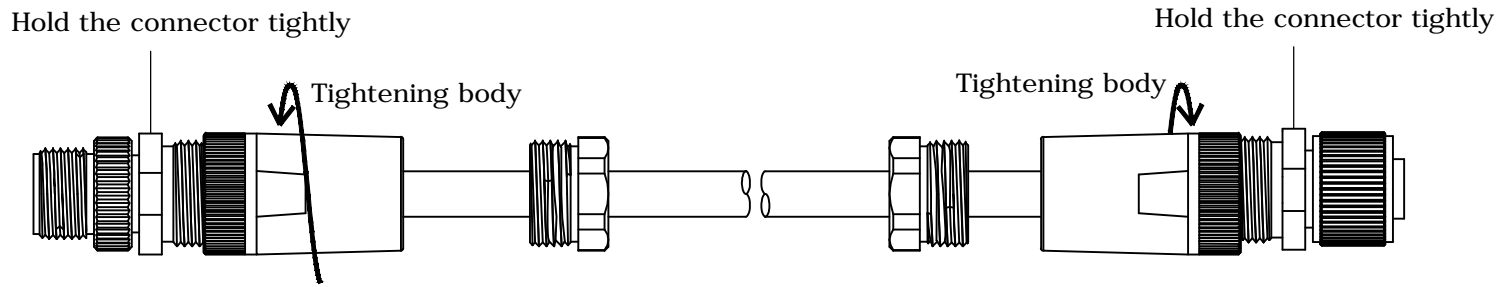

4. Assembly Sealing Nut

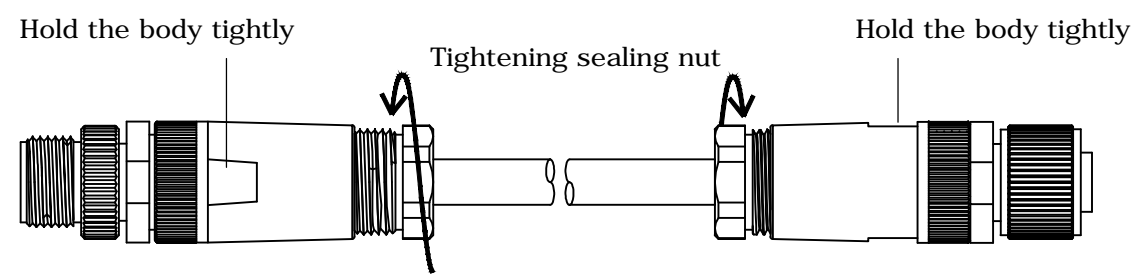

UNLESS OTHERWISE SPECIFIED TOLERANCE				 WWW.ATTEND.COM.TW	
UNIT:	DECIMAL	LINEAR	ANGLES		
mm	X.	±0.50	±5°		
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
DRAWN	Tim	2025/02/25	DRAWN NAME: M Series For Female Field Installable Type Design Guide		
CHECKED	Fros	2025/02/25	PRODUCT NO.		
APPROVED	Ken	2025/02/25	FILE NAME		
		SCALE	SHEET 1/1	SIZE A4	M Series FFO_DG