




REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2023/10/23

SPECIFICATION:

1. Current Rating: 4A
2. Voltage Rating: 250V
3. Waterproof: IPX7 or IP67
4. Operating temperature range: -40°C~+85°C

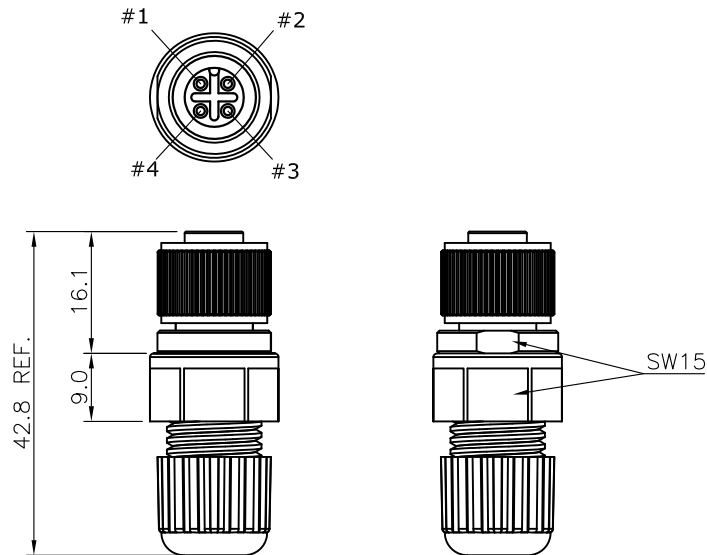

Recommend cable OD=5.0~6.8mm

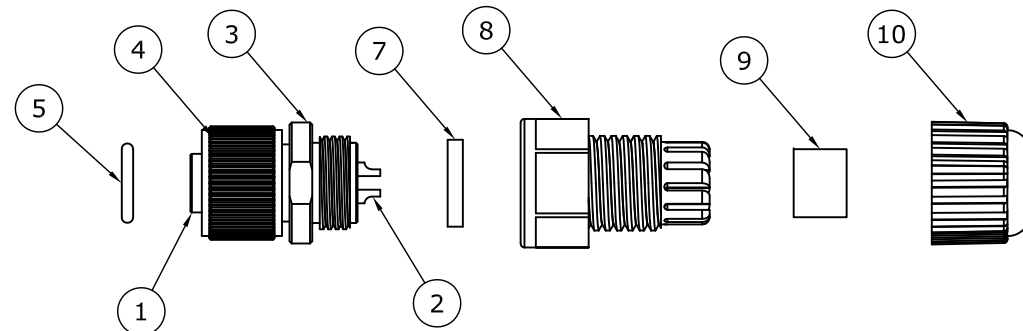

10	SEALING NUT	PA66
9	SEAL	Silicone, gray
8	CLAMP RING	PA66
7	GASKET	Silicone, gray
6	EPOXY	black
5	ORING	EPDM
4	NUT	Aluminum alloy, sating nickel plated
3	SHELL	Brass, nickel plated
2	CONTACT	Brass, gold flash plating over Nickel
1	HOUSING	PBT, UL94V-0, Black

NO.	PART NAME	DESCRIPTION
UNLESS OTHERWISE SPECIFIED TOLERANCE		
UNIT:	DECIMAL	LINEAR
	mm	mm
	X.	±0.50
	X.X	±0.25
mm	X.XX	±0.12
	ANGLES	±1°
www.attend.com.tw		
DRAWN	Fros	2023/10/23
CHECKED	Tim	2023/10/23
APPROVED	Ken	2023/10/23
SCALE	1/1	SHEET 1/1
SIZE	A4	FILE NAME
DRAWN NAME:		216A-04FF1_B_1
M12 A- Code Plug for Cable, 4 Pin Female For Field Installable, Plastic, G/F		
PRODUCT NO.		



