



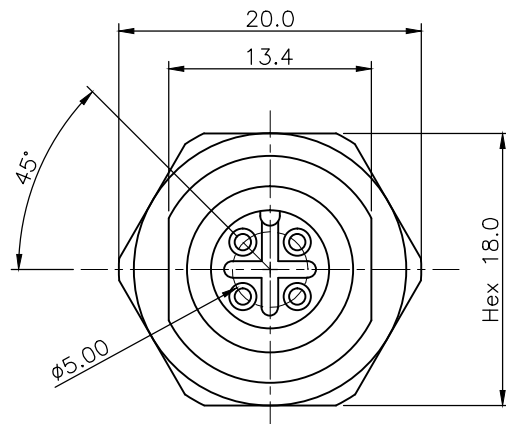
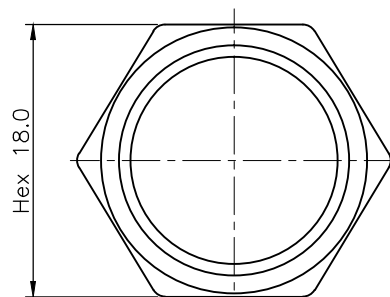


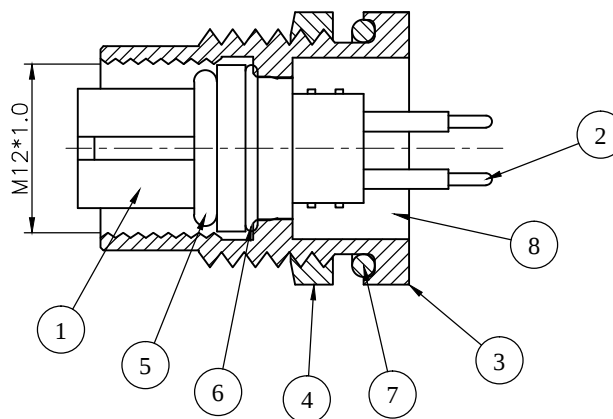

CUT OUT

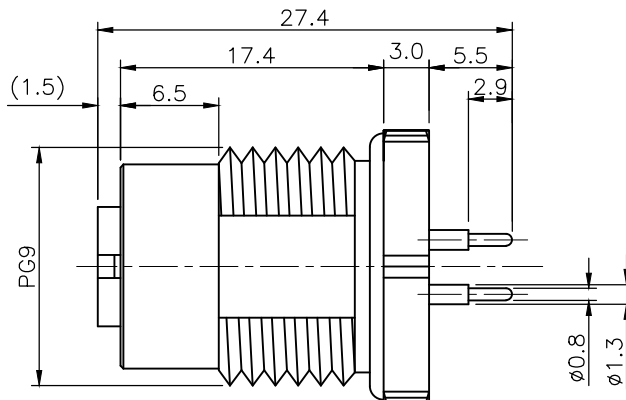


NUT

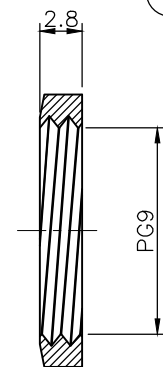

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2016/11/25
2	ECR220421001	TIM	2022/04/21

SPECIFICATION:

- Current Rating: 4A
- Voltage Rating: 250V
- Waterproof: IPX7
- Operating temperature range: -40°C~+85°C



RECOMMENDED LAYOUT


8	EPOXY	EF400A & EF400B, Black
7	O-RING	EPDM, Black
6	O-RING	EPDM, Black
5	O-RING	EPDM, Black
4	NUT	Brass, Nickel plating
3	SHELL	Brass, Nickel plating
2	CONTACT	Brass, 10u" Gold plating over Nickel
1	HOUSING	PBT, UL94V-0, Black

NO.	PART NAME	DESCRIPTION
UNLESS OTHERWISE SPECIFIED TOLERANCE		
UNIT:	DECIMAL	LINEAR
	X.	±0.50
	X.X	±0.25
	X.XX	±0.12
m m	ANGLES	±5°
		±3°
		±1°
DRAWN	Fros	2016/11/25
CHECKED	Tim	2016/11/25
APPROVED	Ken	2016/11/25
SCALE	2/1	SHEET 1/1
SIZE	A4	
DRAWN NAME:		M12 A- Code Receptacle, 4Pin
CHECKED NAME:		Female Straight PCB Type Front Fastened
APPROVED NAME:		PRODUCT NO. 216A-04FSF
FILE NAME		216A-04FSF_B_2




WWW.ATTEND.COM.TW


1. Soldering Board



2. Installation Direction

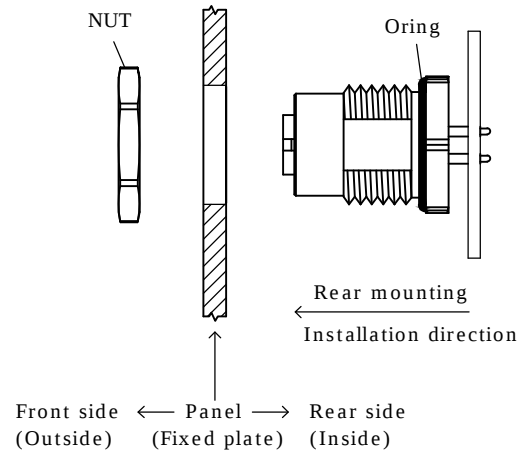

3. Connector Mated to Panel Mount

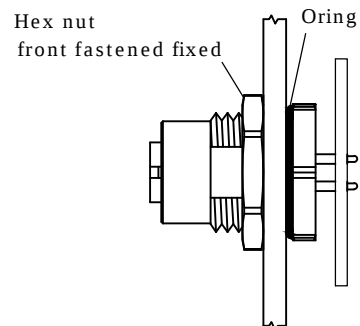

UNLESS OTHERWISE SPECIFIED TOLERANCE					
UNIT:	DECIMAL	LINEAR	ANGLES		
m m	X.	±0.50	±5°	WWW.ATTEND.COM.TW	
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
DRAWN	Tim	2025/02/25	DRAWN NAME:		
CHECKED	Fros	2025/02/25	M Series For Female DIP Type Front Fastened Design Guide		
APPROVED	Ken	2025/02/25	PRODUCT NO.		
	SCALE	SHEET 1/1	SIZE A4	FILE NAME	M Series FSF_DG