


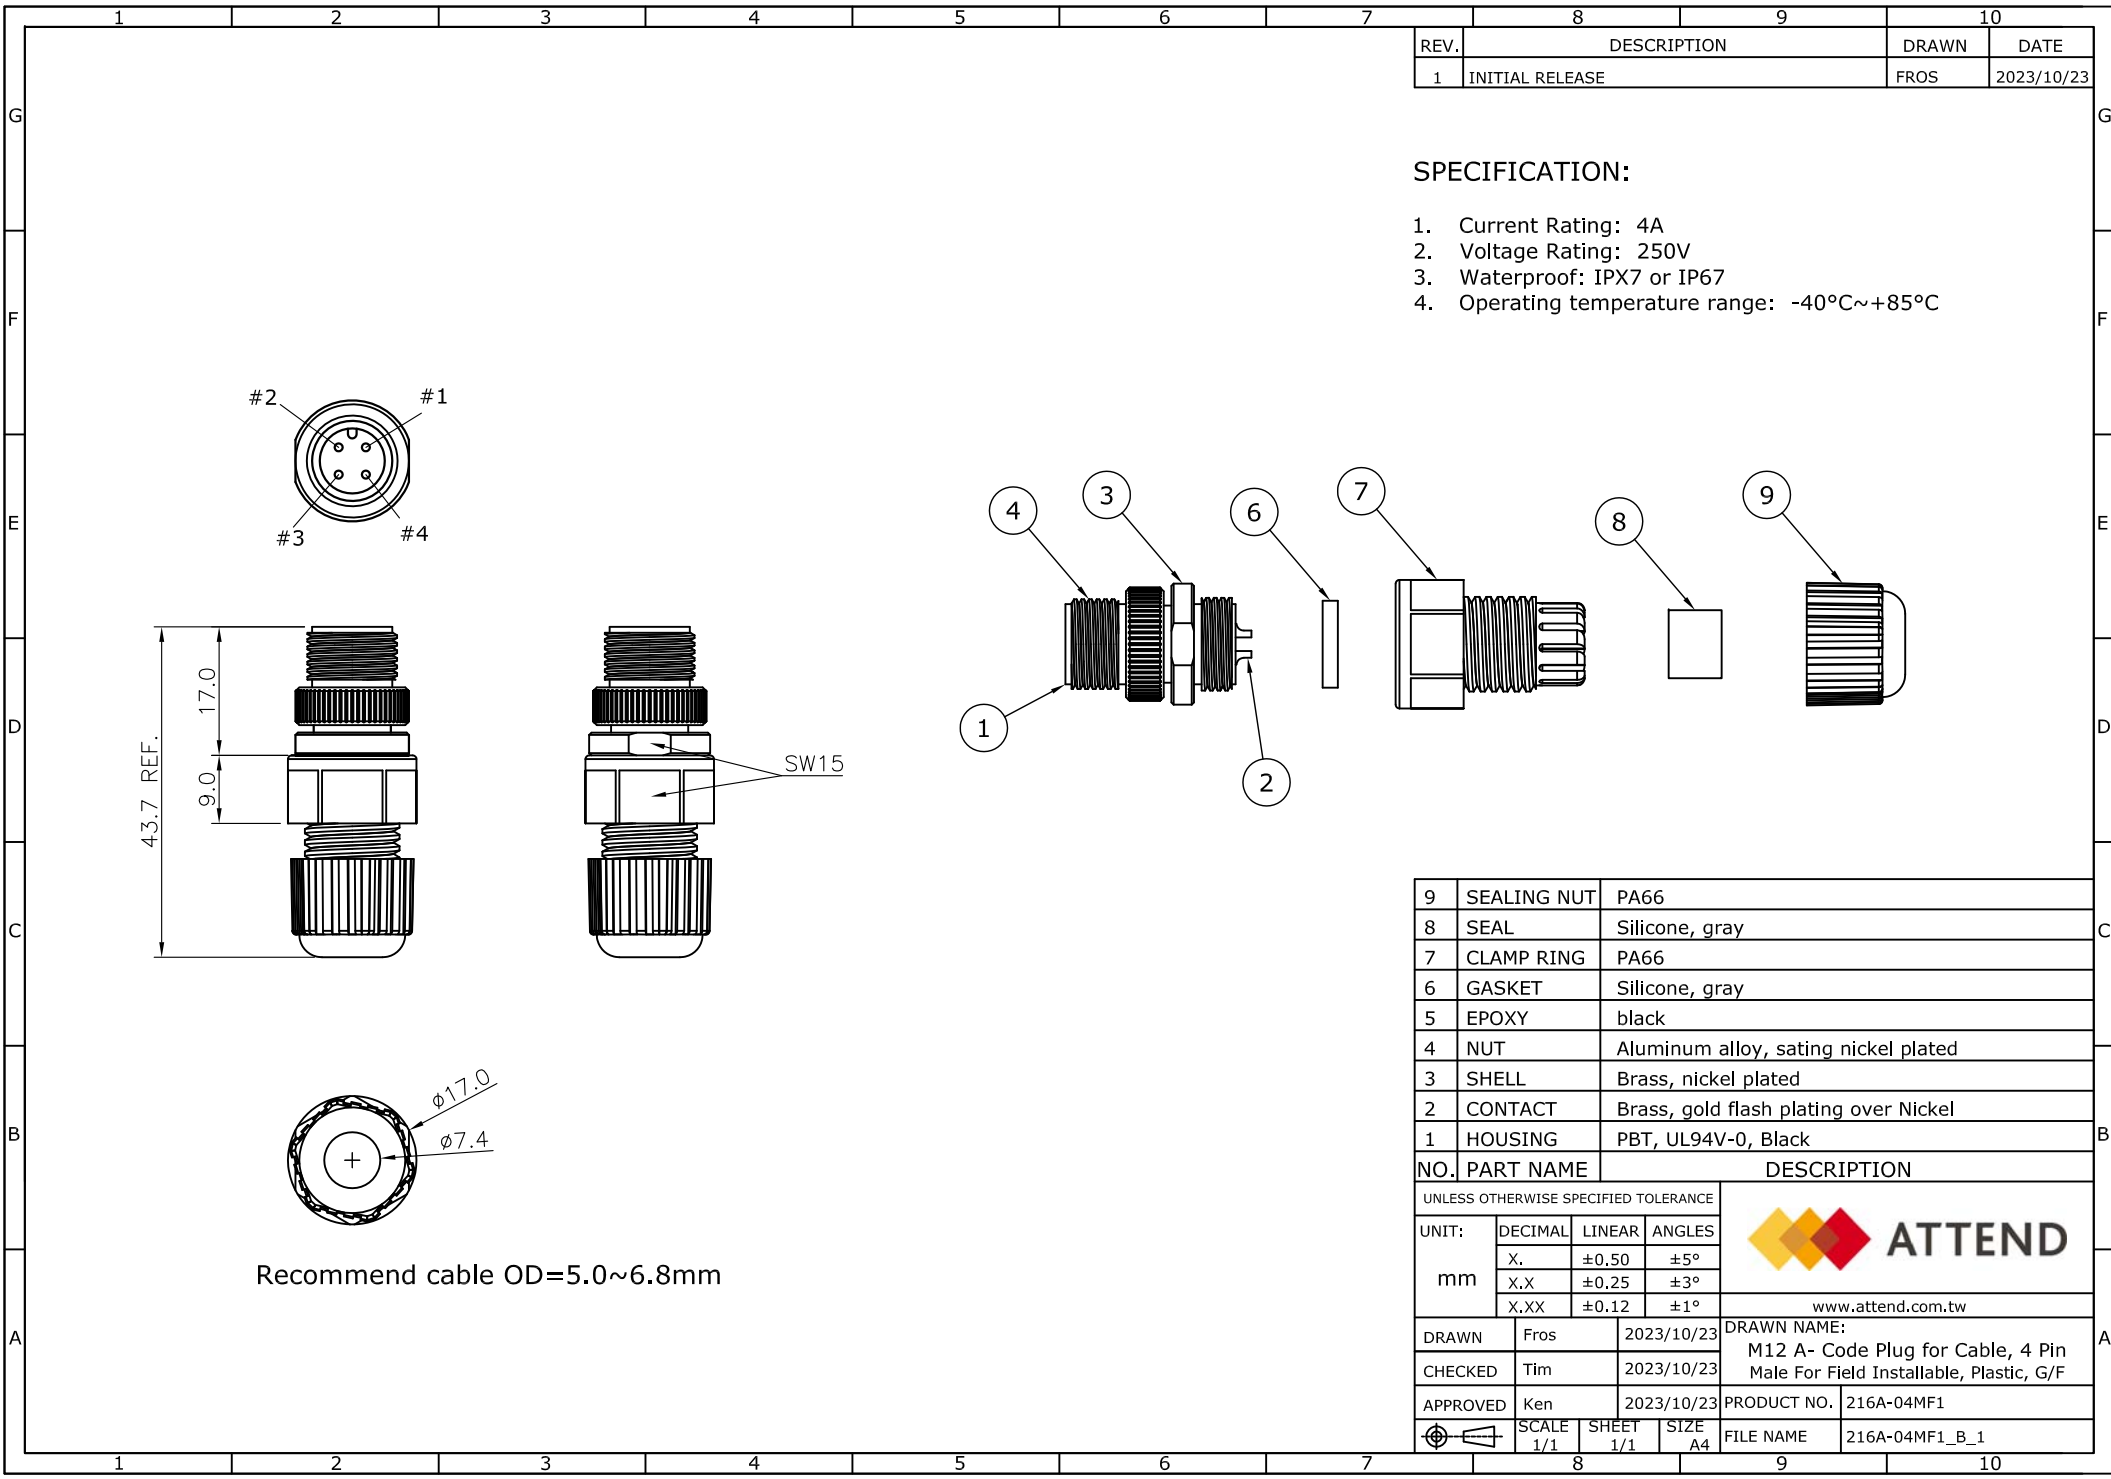

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2023/10/23

SPECIFICATION:

1. Current Rating: 4A
2. Voltage Rating: 250V
3. Waterproof: IPX7 or IP67
4. Operating temperature range: -40°C~+85°C

9	SEALING NUT	PA66
8	SEAL	Silicone, gray
7	CLAMP RING	PA66
6	GASKET	Silicone, gray
5	EPOXY	black
4	NUT	Aluminum alloy, sating nickel plated
3	SHELL	Brass, nickel plated
2	CONTACT	Brass, gold flash plating over Nickel
1	HOUSING	PBT, UL94V-0, Black

NO.		PART NAME	DESCRIPTION
UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT:	DECIMAL	LINEAR	ANGLES
	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°
mm			
DRAWN			Fros
CHECKED			Tim
APPROVED			Ken
SCALE			1/1
SHEET			1/1
SIZE			A4
FILE NAME			216A-04MF1_B_1
DRAWN NAME:			
M12 A- Code Plug for Cable, 4 Pin Male For Field Installable, Plastic, G/F			
PRODUCT NO.			
216A-04MF1			

