
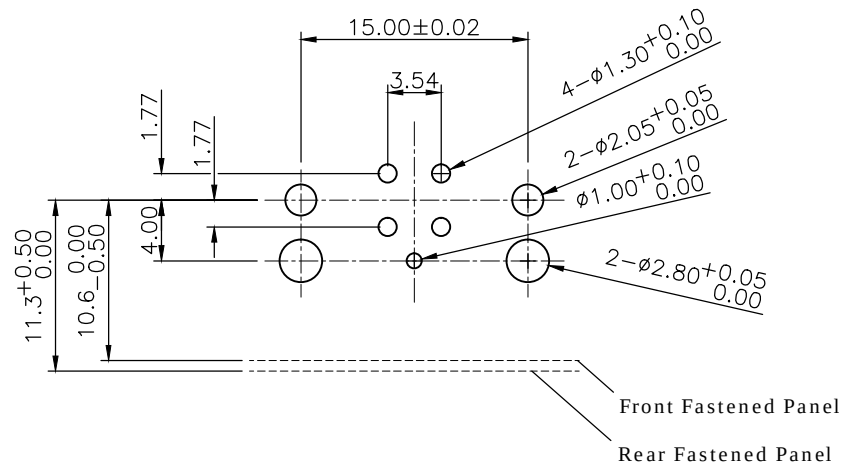


REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2025/05/09

NOTES:

1. Rated current: 4A
2. Rated voltage: 250V
3. Operation temperature: -40°C to +85°C

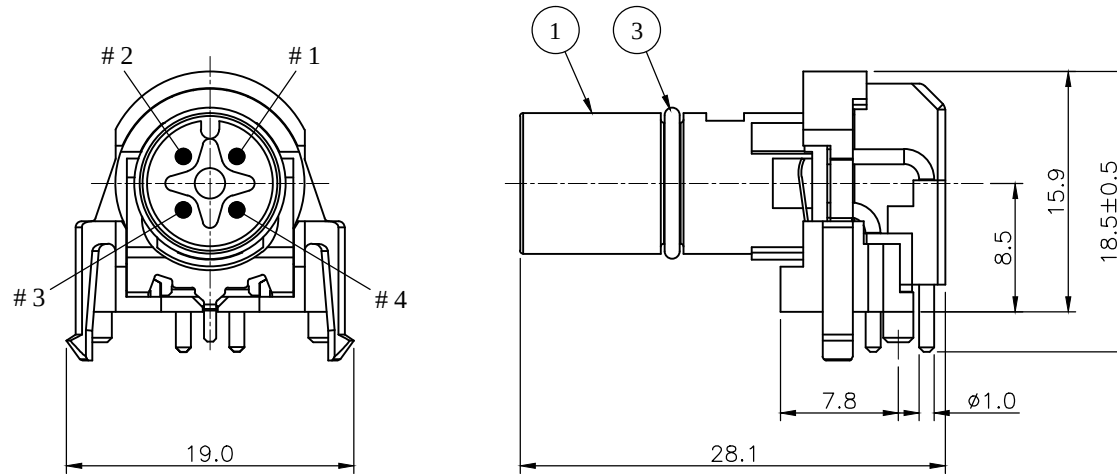

Recommended Layout (Top View)
General Tolerance: ±0.05mm

4	GROUND		Phosphor Bronze, Nickel plating		
3	ORING		VITON		
2	CONTACT		Brass, Gold plating over Nickel		
1	HOUSING		PA9T, UL94V-0, Black		
NO. PART NAME			DESCRIPTION		
UNLESS OTHERWISE SPECIFIED TOLERANCE			 ATTEND		
UNIT:	DECIMAL	LINEAR			ANGLES
m m	X.	±0.50			±5°
	X.X	±0.25			±3°
	X.XX	±0.12			±1°
			WWW.ATTEND.COM.TW		
DRAWN		Tim	2025/05/09	DRAWN NAME: M12 Two Piece Insert A-Code, 4Pin Male R/A DIP Type	
CHECKED		Fros	2025/05/09		
APPROVED		Ken	2025/05/09		
				PRODUCT NO.	216A-04MRA
		SCALE 2.0	SHEET 1/1	SIZE A4	FILE NAME 216A-04MRA_B_1



WWW.ATTEND.COM.TW