
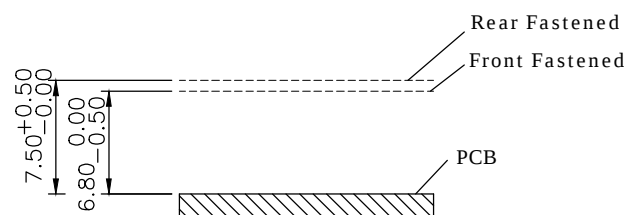
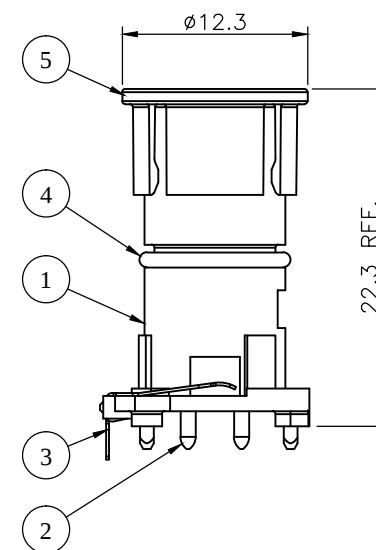
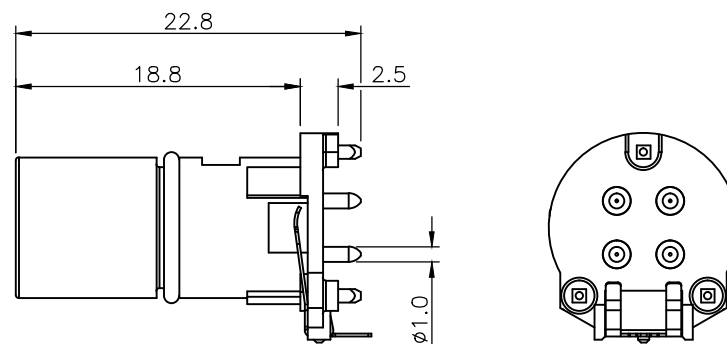



REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2025/05/09

NOTES:

1. Rated current: 4A
2. Rated voltage: 250V
3. Operation temperature: -40°C to +85°C

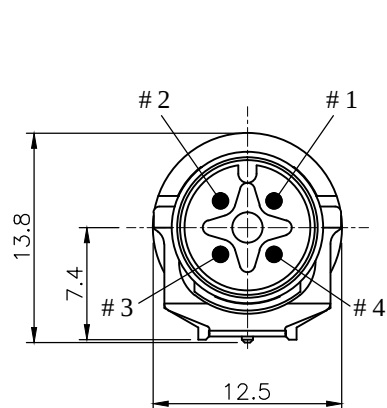

Recommended Panel Distance

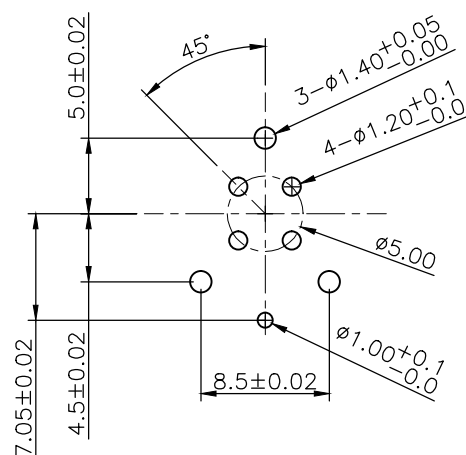

Recommended Layout (Top View)
PCB Thickness: 1.6mm
General Tolerance: ±0.05mm

5	CAP	PA66		
4	ORING	VITON		
3	GROUND	Phosphor Bronze, Nickel plating		
2	CONTACT	Brass, Gold plating over Nickel		
1	HOUSING	PA9T, UL94V-0, Black		
NO. PART NAME		DESCRIPTION		
UNLESS OTHERWISE SPECIFIED TOLERANCE				
UNIT: m m	DECIMAL	LINEAR	ANGLES	
	X.	±0.50	±5°	
	X.X	±0.25	±3°	
	X.XX	±0.12	±1°	
			WWW.ATTEND.COM.TW	
DRAWN		Tim	2025/05/09	DRAWN NAME: M12 Two Piece Insert A-Code, 4Pin Male DIP Type
CHECKED		Fros	2025/05/09	
APPROVED		Ken	2025/05/09	
PRODUCT NO.		216A-04MSA		
FILE NAME		216A-04MSA_B_1		



WWW.ATTEND.COM.TW