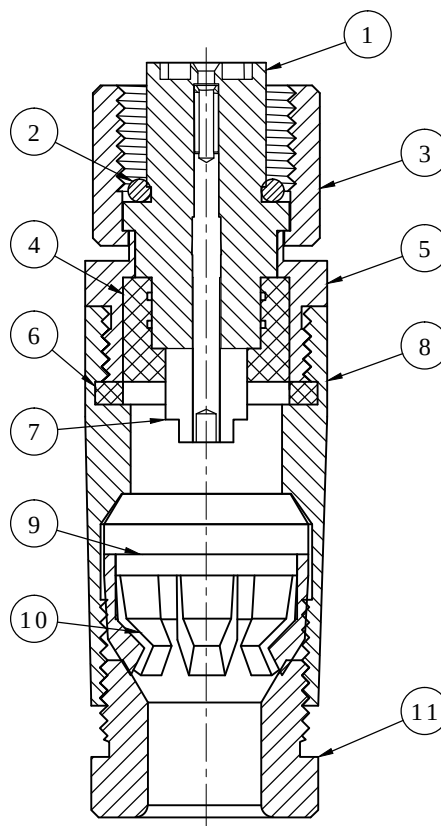
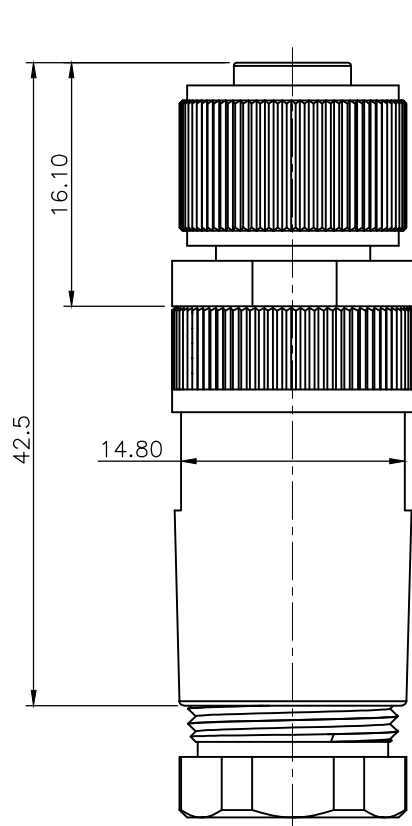


M12*1.0

 $\phi 15.00$ 

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2018/04/12
2	ECR220421001	TIM	2022/04/21

SPECIFICATION:

1. CURRENT RATING: 4A
2. VOLTAGE: 60V
3. WATER PROOF: IPX7
4. OPERATION TEMPERATURE: -40°C TO +85°C

NOTE:

Applicable Cable Outer Diameter: $\phi 5.0$ to $\phi 7.0$ mm

11	NUT B	Aluminium alloy, Nickel plating
10	GLAND CAGE	POM, White
9	GLAND	Silicone, Black
8	BODY	Aluminium alloy, Nickel plating
7	CONTACT	Brass, Gold plating over Nickel
6	O-RING B	Silicone, Black
5	SHELL	Aluminium alloy, Nickel plating
4	EPOXY	EPOXY
3	NUT A	Aluminium alloy, Nickel plating
2	O-RING A	EPDM, Black
1	HOUSING	PBT, UL94V-0, Black
NO	PART NAME	DESCRIPTION

UNLESS OTHERWISE SPECIFIED TOLERANCE

UNIT:	DECIMAL	LINEAR	ANGLES
m m	X.	± 0.50	$\pm 5^\circ$
	X.X	± 0.25	$\pm 3^\circ$
	X.XX	± 0.12	$\pm 1^\circ$



WWW.ATTEND.COM.TW

DRAWN	Tim	2018/04/12	DRAWN NAME:	M12 A- Code Plug for Cable
CHECKED	Fros	2018/04/12		5 Pin Female For Field Installable
APPROVED	Ken	2018/04/12	PRODUCT NO.	216A-05FF0
	SCALE 2/1	SHEET 1/1	SIZE A4	FILE NAME 216A-05FF0_B_2

