
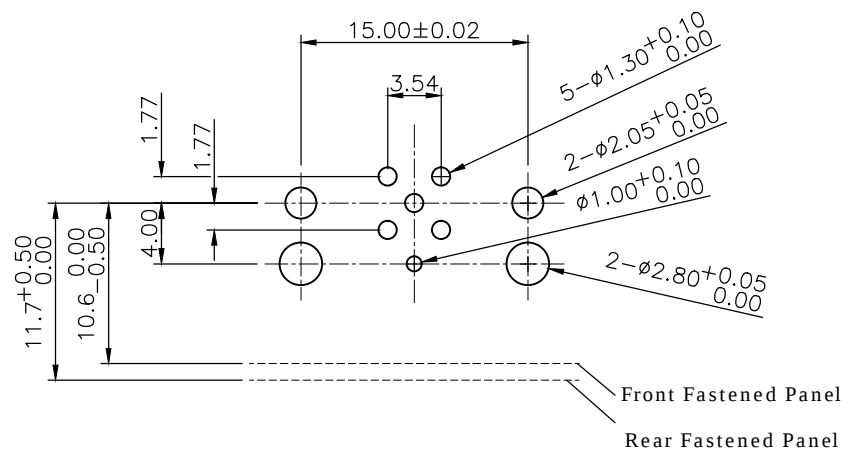
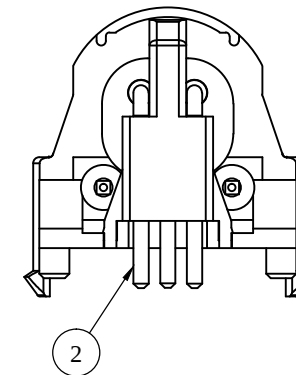


REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2025/05/09

NOTES:

1. Rated current: 4A
2. Rated voltage: 60V
3. Operation temperature: -40°C to +85°C

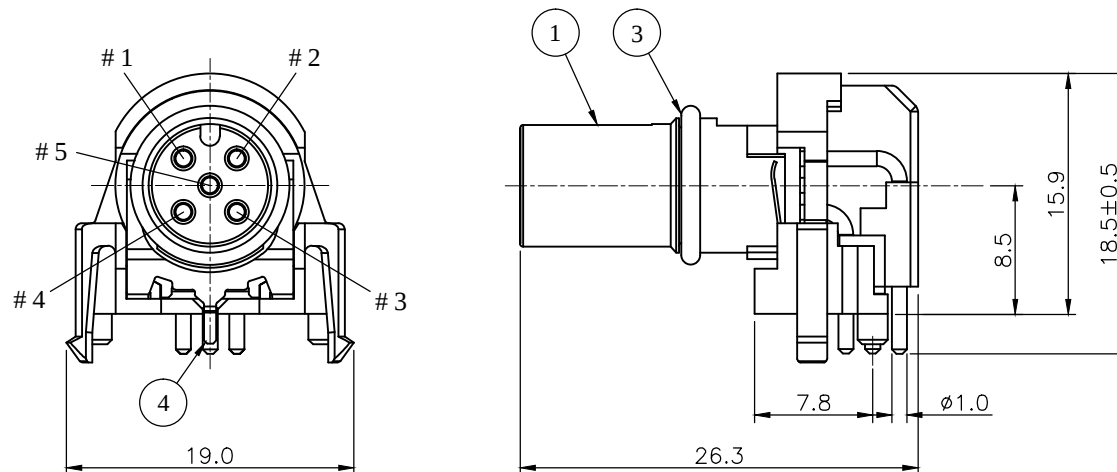

Recommended Layout (Top View)
General Tolerance: $\pm 0.05\text{mm}$

4	GROUND		Phosphor Bronze, Nickel plating	
3	ORING		VITON	
2	CONTACT		Brass, Gold plating over Nickel	
1	HOUSING		PA9T, UL94V-0, Black	
NO. PART NAME			DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE				
UNIT:		DECIMAL	LINEAR	ANGLES
m m		X.	±0.50	±5°
		X.X	±0.25	±3°
		X.XX	±0.12	±1°
 ATTEND				
WWW.ATTEND.COM.TW				
DRAWN		Tim	2025/05/09	DRAWN NAME: M12 Two Piece Insert A-Code, 5Pin Female R/A DIP Type
CHECKED		Fros	2025/05/09	
APPROVED		Ken	2025/05/09	
SCALE		SHEET	SIZE	PRODUCT NO.
2.0		1/1	A4	216A-05FRA
		FILE NAME		216A-05FRA_B_1



WWW.ATTEND.COM.TW