

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2018/04/13
2	ECR220421001	TIM	2022/04/21

SPECIFICATION:


1. ELECTRICAL

1.1 Current Rating: 4A

1.2 Voltage Rating: 60V


1.3 Water Proof: IPX7

1.4 Operating Temperature: -40°C~+85°C

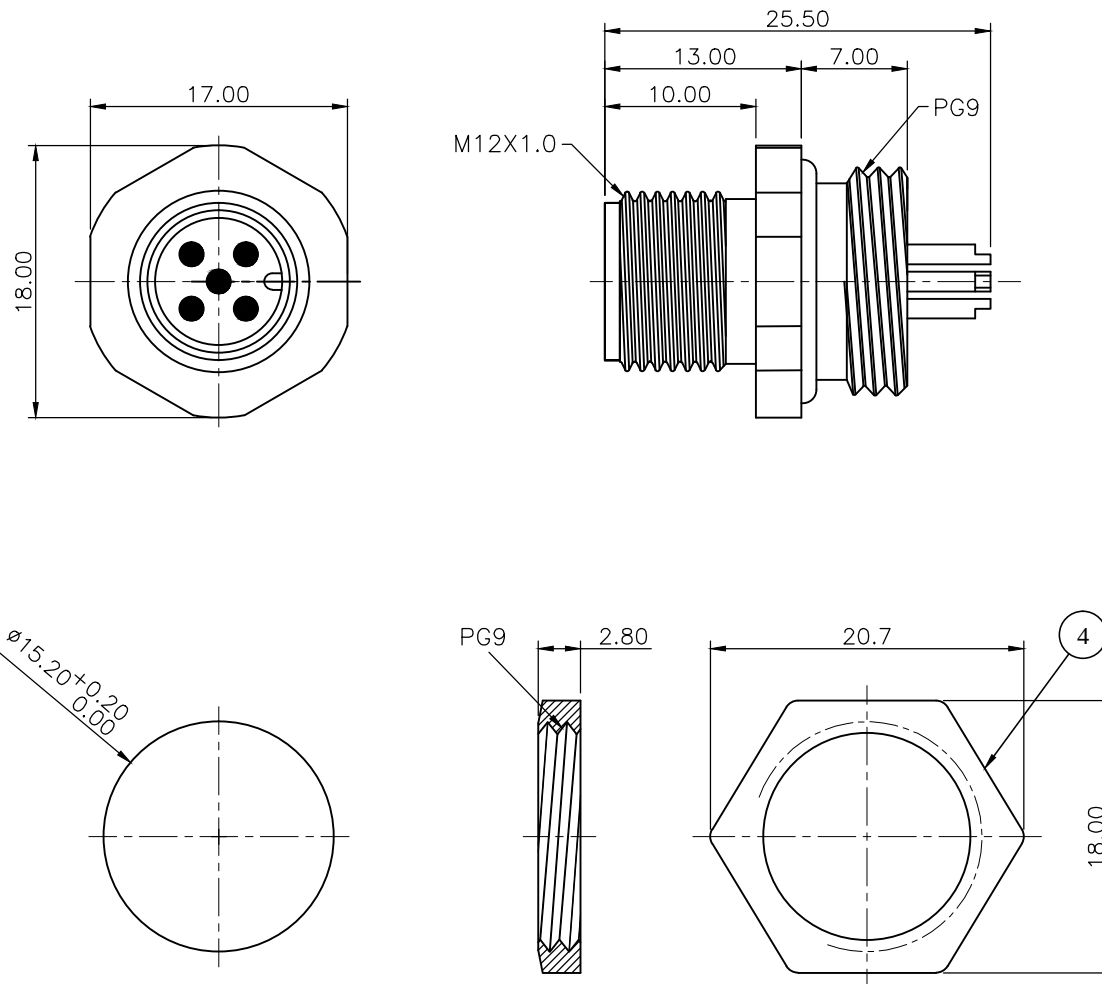

PANEL CUT-OUT

NUT

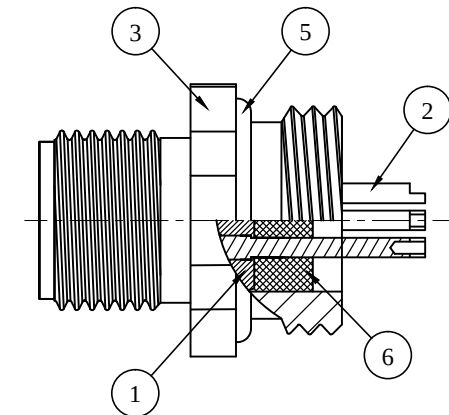


6	EPOXY BASE	EF400A&EF400B, Black			
5	O-RING	NBR, Black			
4	NUT	Brass			
3	SHELL	Brass, Nickel plating			
2	CONTACT	Brass, 10u" Gold plating over Nickel			
1	HOUSING	PBT, UL94V-0, Black			
NO.	PART NAME	DESCRIPTION			
UNLESS OTHERWISE SPECIFIED TOLERANCE		 ATTEND			
UNIT:	DECIMAL			LINEAR	ANGLES
	X.			±0.50	±5°
	X.X			±0.25	±3°
	X.XX			±0.12	±1°
m m		WWW.ATTEND.COM.TW			
DRAWN	Tim	2018/04/13	DRAWN NAME:		
CHECKED	Fros	2018/04/13	M12 A-Code Receptacle, 5Pin Male Solder Type Rear Fastened		
APPROVED	Ken	2018/04/13	PRODUCT NO. 216A-05MAR		
	SCALE 2/1	SHEET 1/1	SIZE A4		
FILE NAME		216A-05MAR_B_2			




WWW.ATTEND.COM.TW


1. Wire Processing

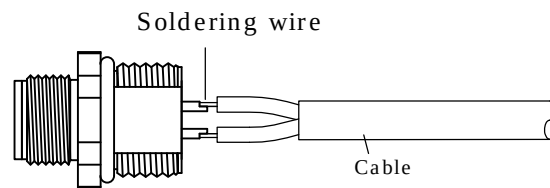

2. Installation Direction

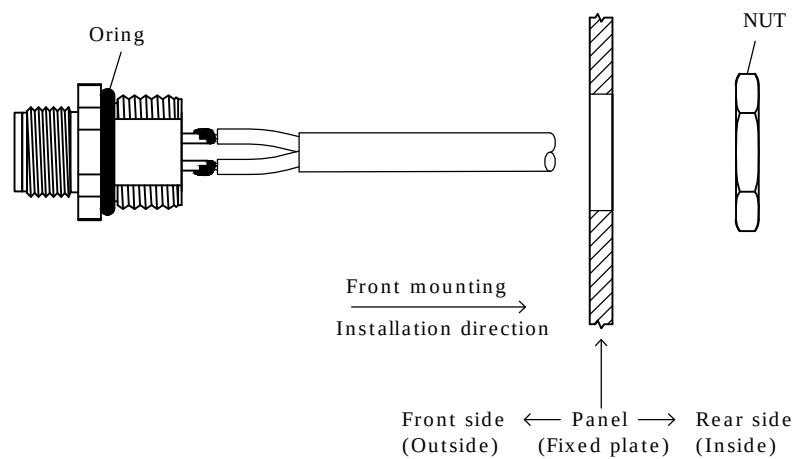

3. Connector Mated to Panel Mount

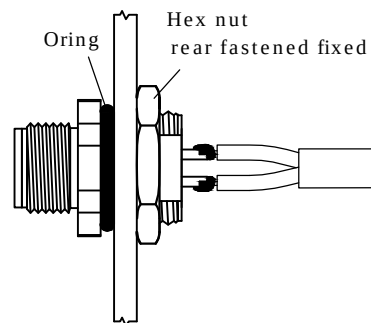

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND	
UNIT:	DECIMAL	LINEAR	ANGLES		
m m	X.	±0.50	±5°	WWW.ATTEND.COM.TW	
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
DRAWN	Tim	2025/02/25	DRAWN NAME:		
CHECKED	Fros	2025/02/25	M Series For Male Solder Type Rear Fastened		
APPROVED	Ken	2025/02/25	Design Guide		
APPROVED	Ken	2025/02/25	PRODUCT NO.		
	SCALE	SHEET 1/1	SIZE A4	FILE NAME	M Series MAR_DG