


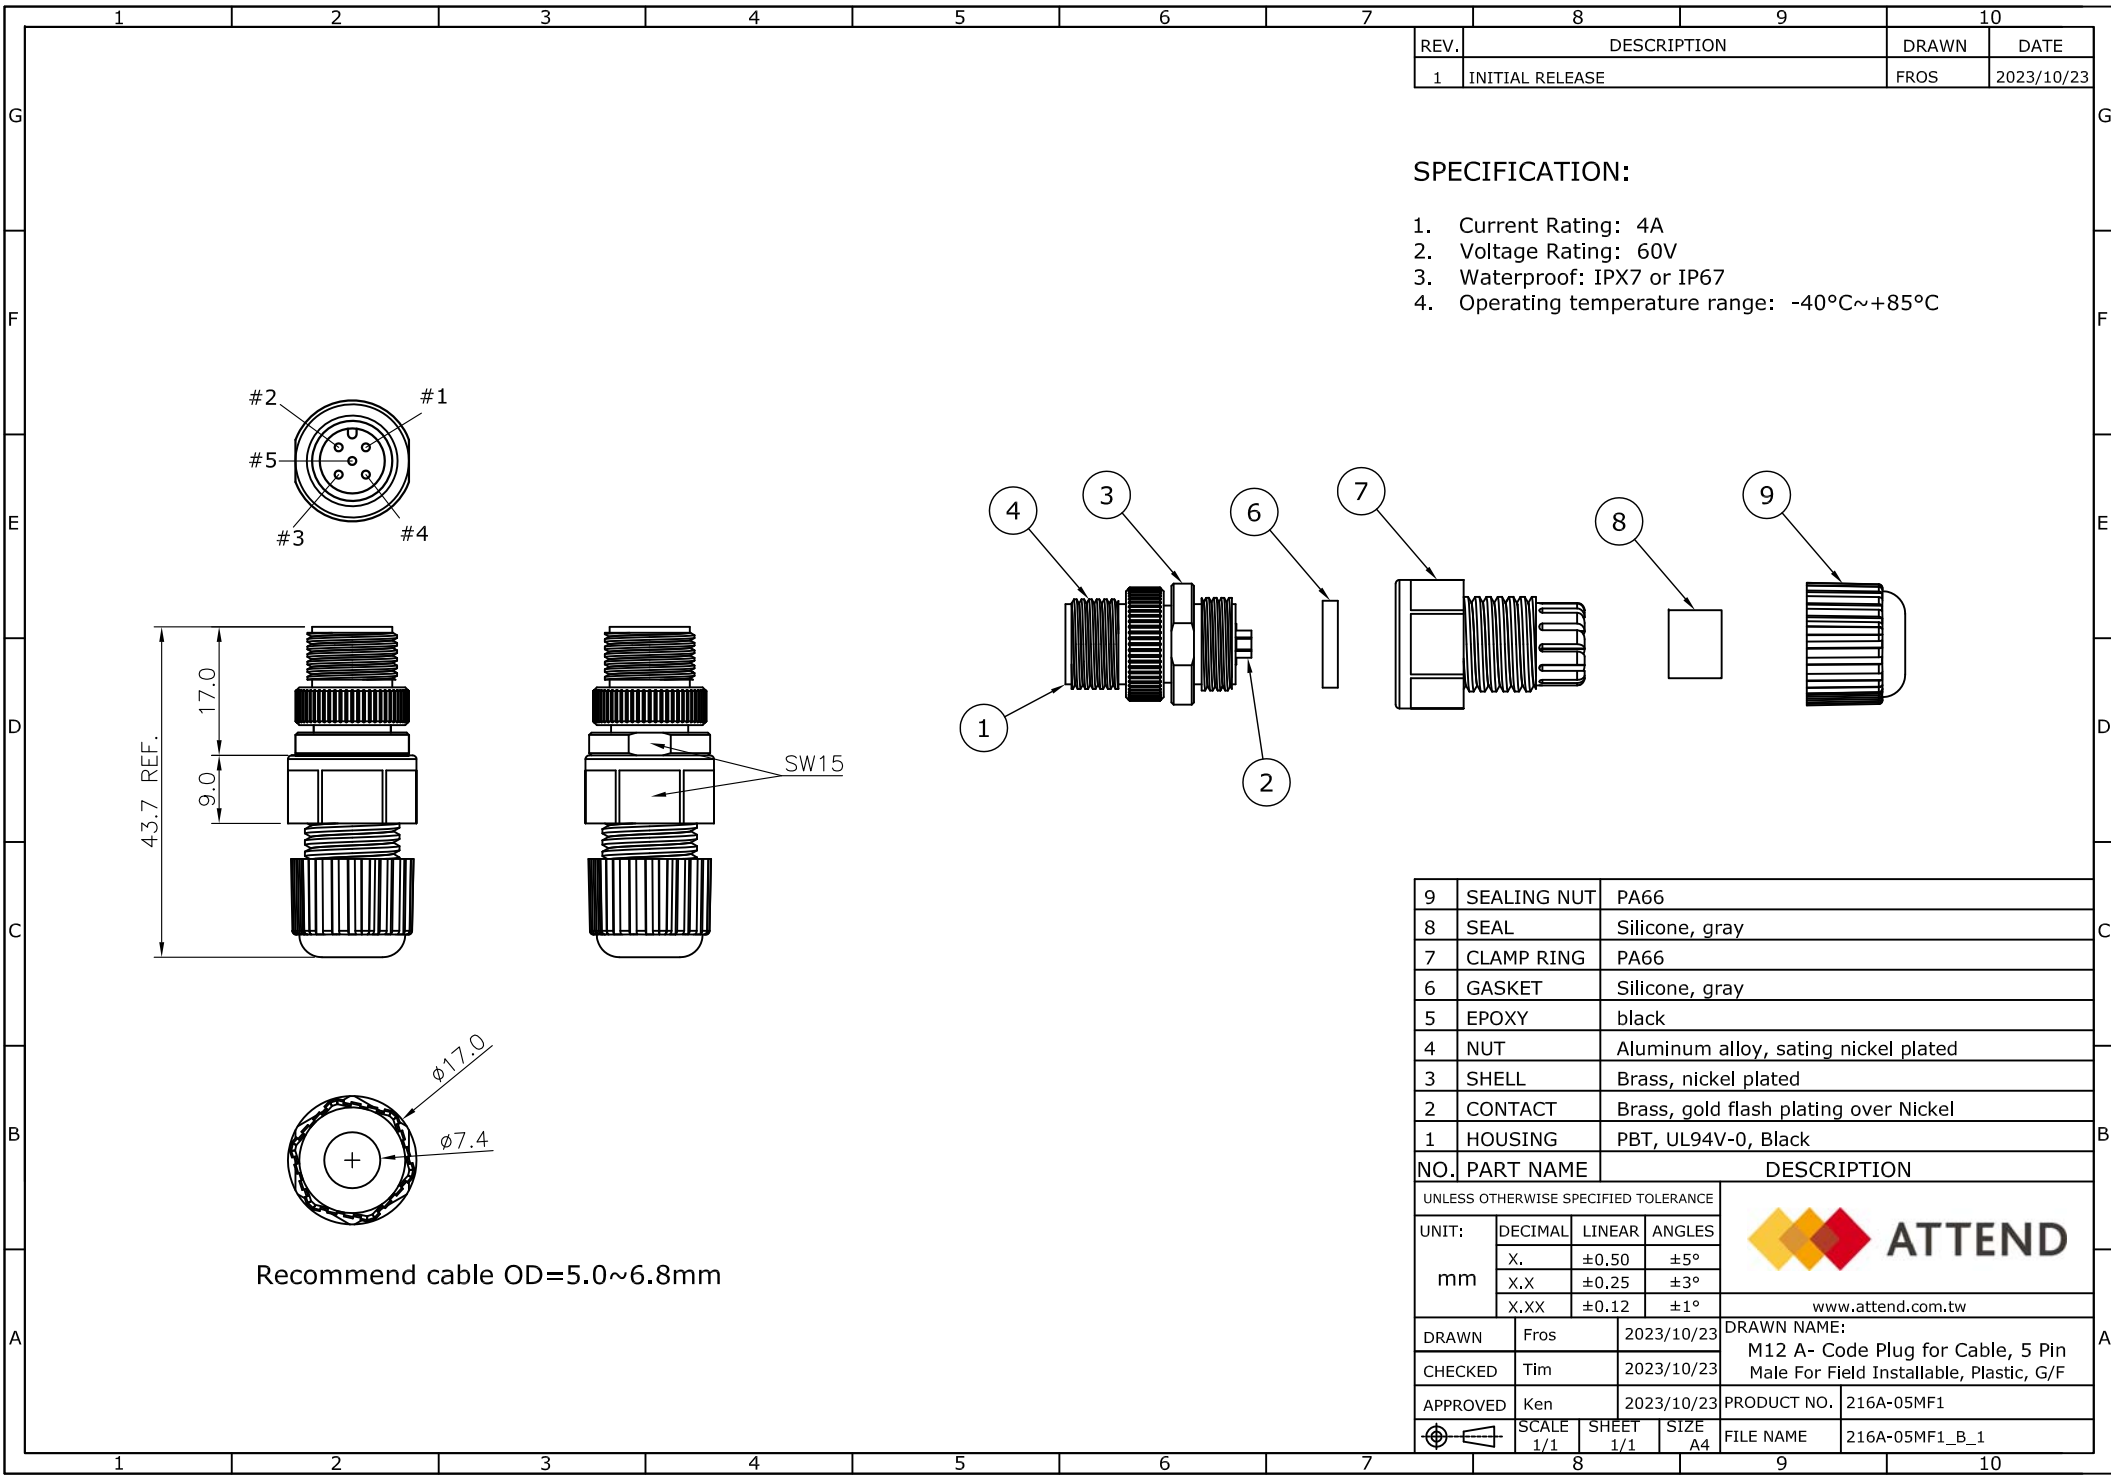

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2023/10/23

SPECIFICATION:

1. Current Rating: 4A
2. Voltage Rating: 60V
3. Waterproof: IPX7 or IP67
4. Operating temperature range: -40°C~+85°C

9	SEALING NUT	PA66
8	SEAL	Silicone, gray
7	CLAMP RING	PA66
6	GASKET	Silicone, gray
5	EPOXY	black
4	NUT	Aluminum alloy, sating nickel plated
3	SHELL	Brass, nickel plated
2	CONTACT	Brass, gold flash plating over Nickel
1	HOUSING	PBT, UL94V-0, Black

NO. PART NAME				DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND	
UNIT: mm	DECIMAL	LINEAR	ANGLES		
	X.	±0.50	±5°		
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
www.attend.com.tw					
DRAWN	Fros	2023/10/23		DRAWN NAME: M12 A- Code Plug for Cable, 5 Pin Male For Field Installable, Plastic, G/F	
CHECKED	Tim	2023/10/23			
APPROVED	Ken	2023/10/23		PRODUCT NO.	216A-05MF1
	SCALE 1/1	SHEET 1/1	SIZE A4	FILE NAME	216A-05MF1_B_1



www.attend.com.tw

