
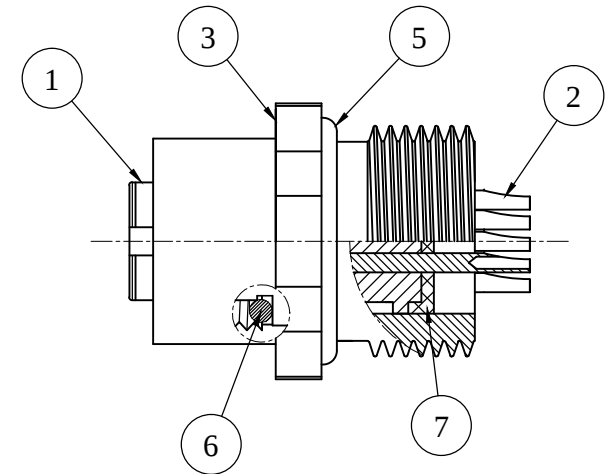


REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2018/04/13
2	ECR220421001	TIM	2022/04/21

SPECIFICATION:

1. Current Rating: 2A
2. Voltage Rating: 30V
3. Waterproof: IPX7
4. Operating temperature range: -40°C~+85°C

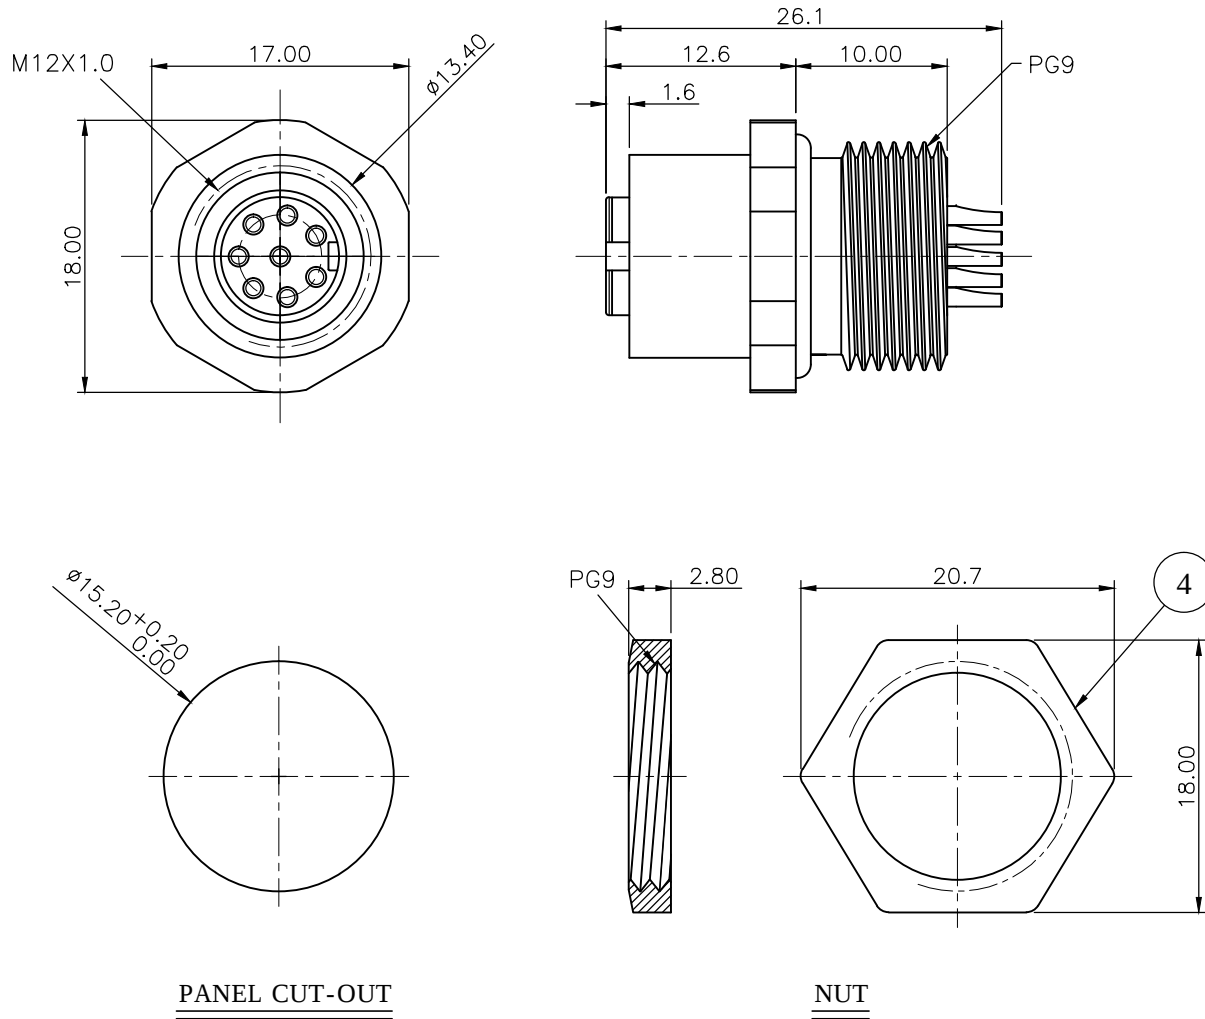


7	EPOXY BASE	
6	O-RING B	EPDM, Black
5	O-RING A	NBR, Black
4	NUT	Copper Alloy
3	SHELL	Copper Alloy, Nickel plating
2	CONTACT	Copper Alloy, 10u" Gold plating over Nickel
1	HOUSING	Thermoplastic, UL94V-0, Black

NO.	PART NAME	DESCRIPTION
UNLESS OTHERWISE SPECIFIED TOLERANCE		
UNIT:	DECIMAL	LINEAR
	X.	±0.50
	X.X	±0.25
	X.XX	±0.12
m m	ANGLES	±5°
		±3°
		±1°
DRAWN	Tim	2018/04/13
CHECKED	Fros	2018/04/13
APPROVED	Ken	2018/04/13
SCALE	2/1	SHEET 1/1
SIZE	A4	FILE NAME
DRAWN NAME:		M12 A-Code Receptacle, 8Pin Female Solder Type Rear Fastened
PRODUCT NO.		216A-08FAR
FILE NAME		216A-08FAR_B_2




WWW.ATTEND.COM.TW


1. Wire Processing

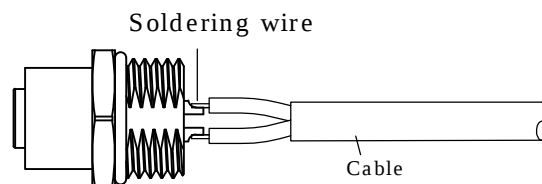

2. Installation Direction

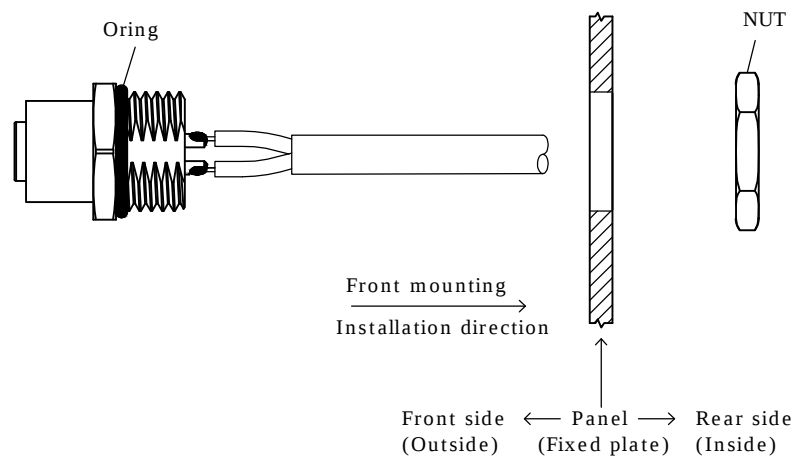

3. Connector Mated to Panel Mount

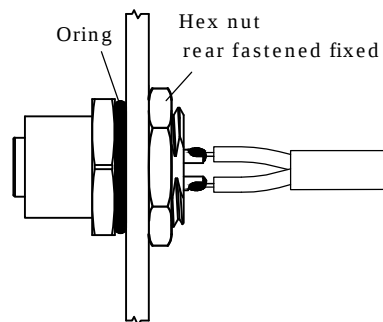

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND		
UNIT:	DECIMAL	LINEAR	ANGLES			
m m	X.	±0.50	±5°	WWW.ATTEND.COM.TW		
	X.X	±0.25	±3°			
	X.XX	±0.12	±1°			
DRAWN	Tim	2025/02/25	DRAWN NAME:			
CHECKED	Fros	2025/02/25	M Series For Female Solder Type Rear Fastened			
APPROVED	Ken	2025/02/25	Design Guide			
	SCALE	SHEET 1/1	SIZE A4	PRODUCT NO.		
				FILE NAME	M Series FAR_DG	