
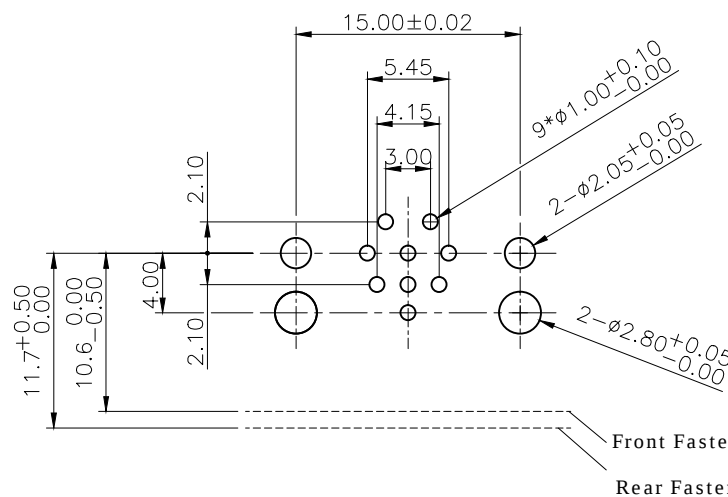
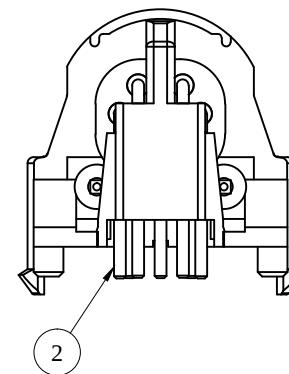
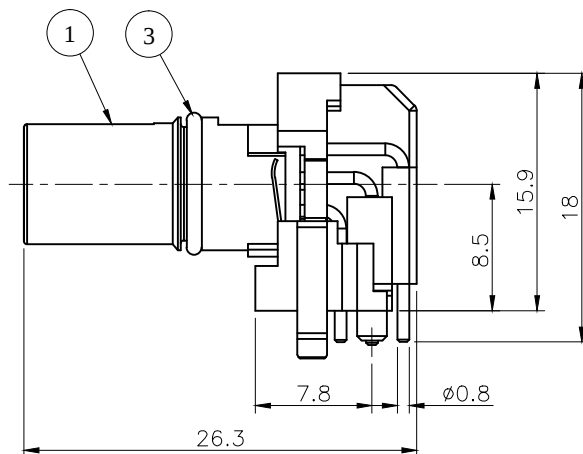


REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	Michael	2025/05/06

NOTES:

1. Rated current: 2A
2. Rated voltage: 30V
3. Operation temperature: -40°C to +85°C

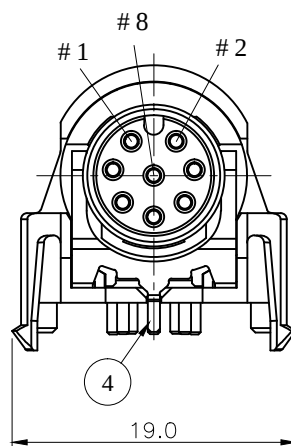

Recommended Layout (Top View)
General Tolerance: $\pm 0.05\text{mm}$

4	GROUND		Phosphor Bronze, Nickel plating		
3	O-RING		VITON		
2	CONTACT		Brass, Gold plating over Nickel		
1	HOUSING		PA9T, UL94V-0, Black		
NO. PART NAME			DESCRIPTION		
UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND www.attend.com.tw	
UNIT:		DECIMAL	LINEAR		ANGLES
m m		X.	±0.50		±5°
		X.X	±0.25		±3°
		X.XX	±0.12		±1°
DRAWN		Michael	2025/05/06	DRAWN NAME:	
CHECKED		Fros	2025/05/06	M12 Two Piece Insert, A-Code 8Pin Female R/A DIP Type	
APPROVED		Ken	2025/05/06	PRODUCT NO.	216A-08FRA
		SCALE 2/1	SHEET 1/1	SIZE A4	FILE NAME 216A-08FRA_B_1



www.attend.com.tw