


REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	Michael	2025/05/06


NOTES:

1. Rated current: 2A
2. Rated voltage: 30V
3. Operation temperature: -40°C to +85°C

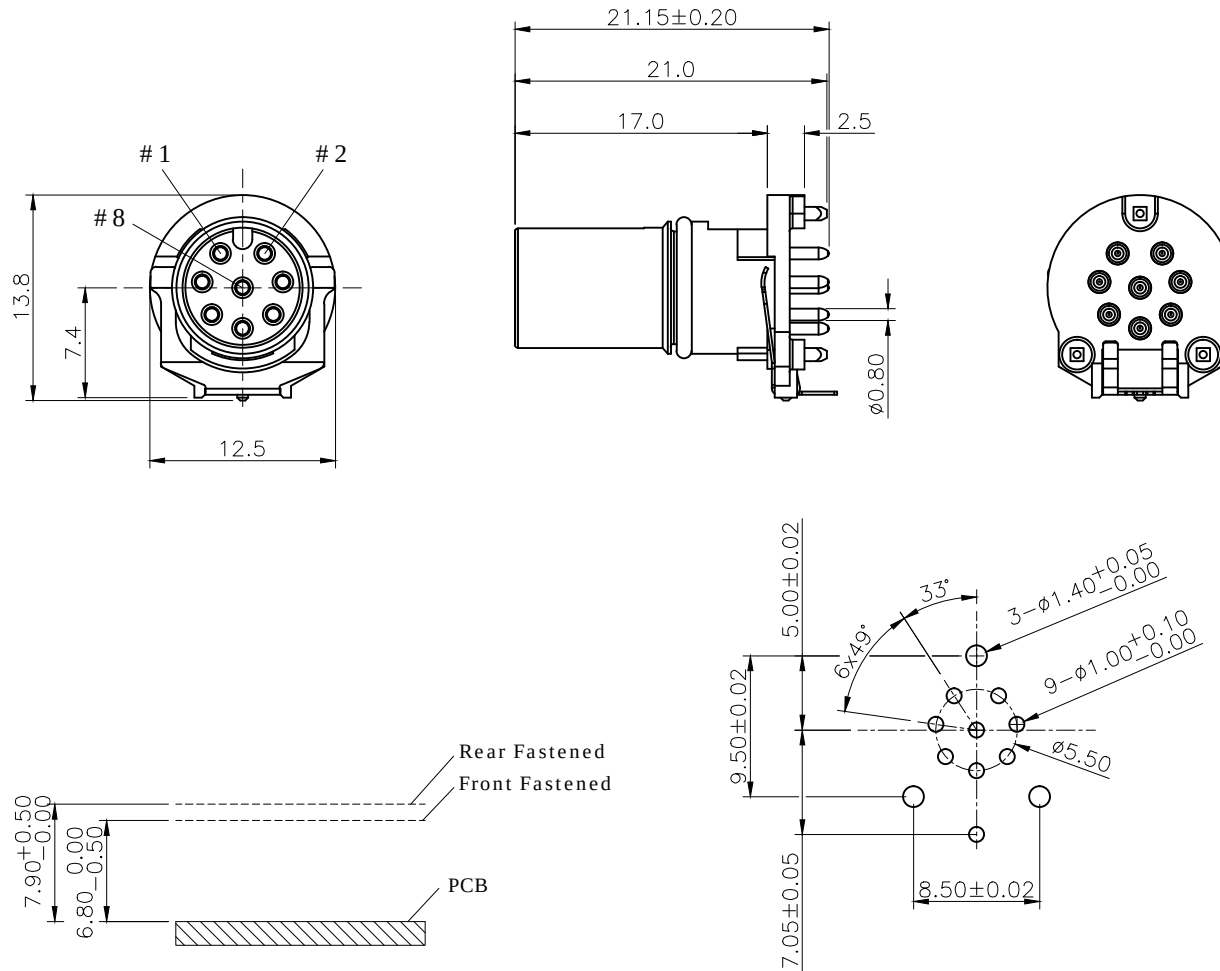

Recommended Panel Distance

Recommended Layout (Top View)
PCB Thickness: 1.6 mm
General Tolerance: ±0.05mm

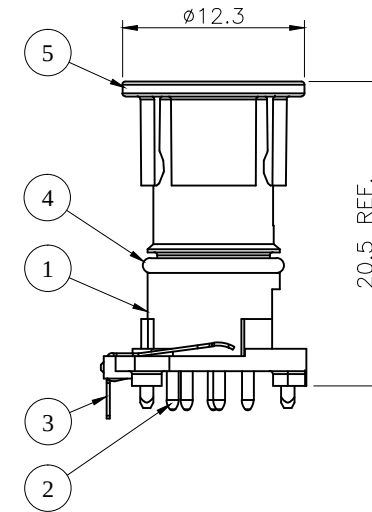

5	CAP	PA66	
4	ORING	VITON	
3	GROUND	Phosphor Bronze, Nickel plating	
2	CONTACT	Brass, Gold plating over Nickel	
1	HOUSING	PA9T, UL94V-0, Black	
NO. PART NAME		DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT: m m	DECIMAL	LINEAR	ANGLES
	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°
			 ATTEND
			www.attend.com.tw
DRAWN	Michael	2025/05/06	DRAWN NAME: M12 Two Piece Insert A-Code, 8Pin Female DIP Type
CHECKED	Fros	2025/05/06	
APPROVED	Ken	2025/05/06	
	SCALE 2/1	SHEET 1/1	SIZE A4
	FILE NAME		216A-08FSA_B_1
PRODUCT NO.		216A-08FSA	

