
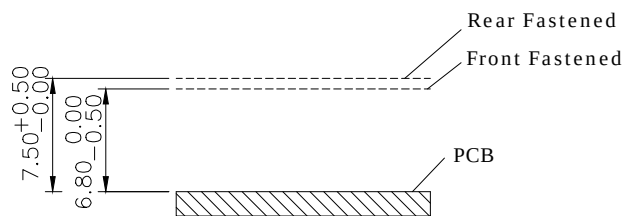
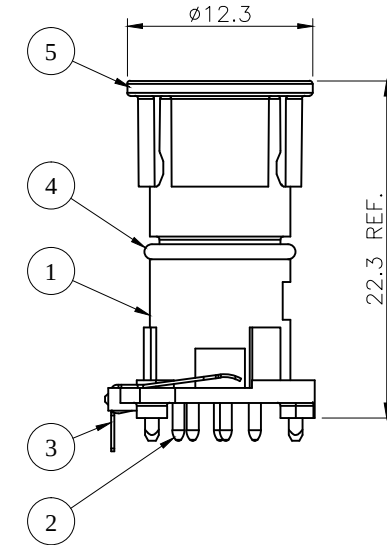


REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	Michael	2025/05/06

NOTES:

1. Rated current: 2A
2. Rated voltage: 30V
3. Operation temperature: -40°C to +85°C

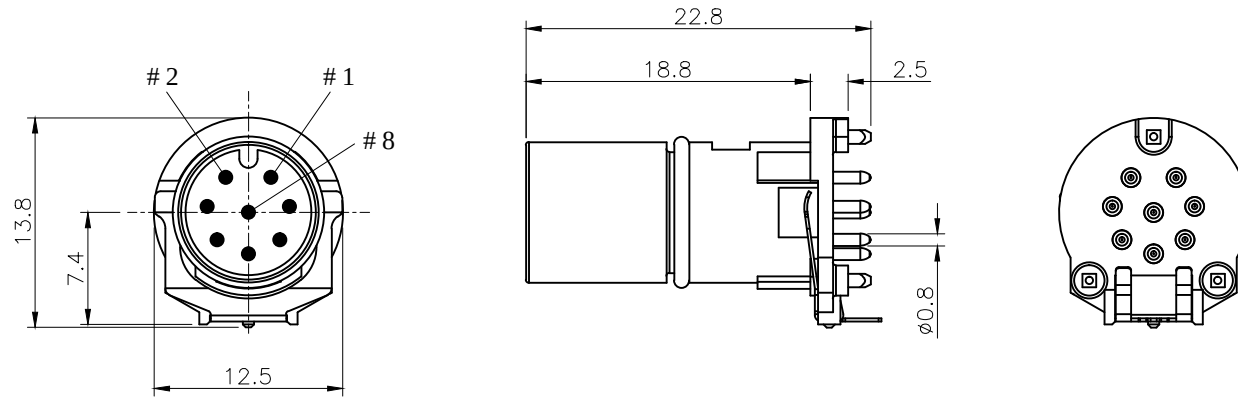

Recommended Panel Distance

Recommended Layout (Top View)
PCB Thickness: 1.6mm
General Tolerance: ±0.05mm

5	CAP	PA66		
4	ORING	VITON		
3	GROUND	Phosphor Bronze, Nickel plating		
2	CONTACT	Brass, Gold plating over Nickel		
1	HOUSING	PA9T, UL94V-0, Black		
NO. PART NAME		DESCRIPTION		
UNLESS OTHERWISE SPECIFIED TOLERANCE				
UNIT:	DECIMAL	LINEAR	ANGLES	
m m	X.	±0.50	±5°	
	X.X	±0.25	±3°	
	X.XX	±0.12	±1°	
 ATTEND				
www.attend.com.tw				
DRAWN	Michael	2025/05/06	DRAWN NAME: M12 Two Piece Insert A-Code, 8Pin Male DIP Type	
CHECKED	Fros	2025/05/06		
APPROVED	Ken	2025/05/06	PRODUCT NO.	216A-08MSA
	SCALE 2/1	SHEET 1/1	SIZE A4	FILE NAME 216A-08MSA_B_1



www.attend.com.tw