

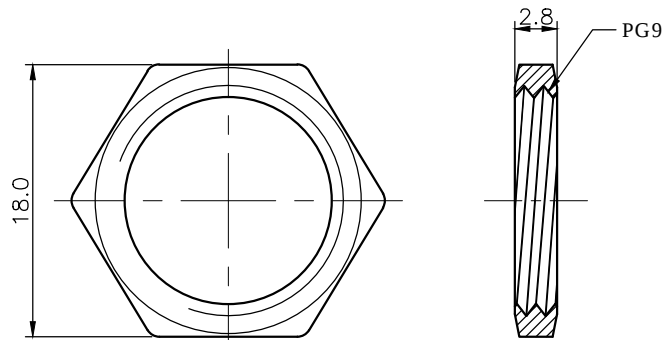
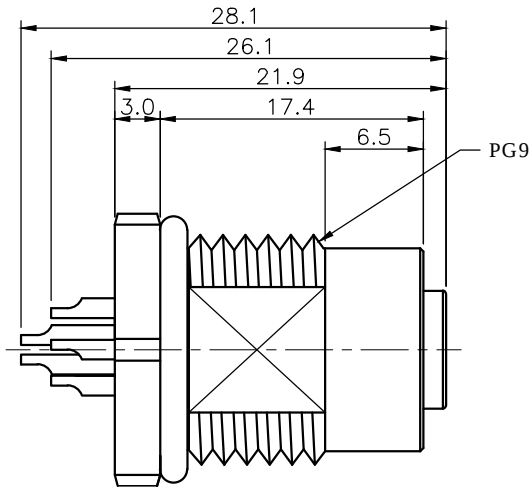


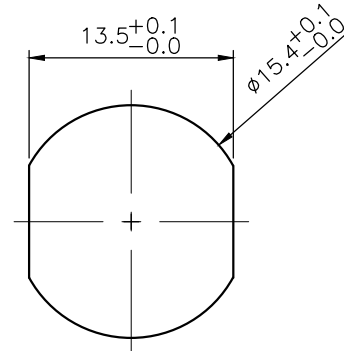

NUT

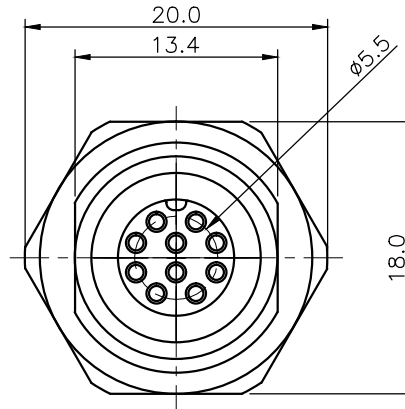


PANEL CUT OUT

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2017/08/17
2	ECR220421001	TIM	2022/04/21

SPECIFICATION:


1. CURRENT RATING: 1.5A
2. VOLTAGE: 30V
3. WATER PROOF: IPX7
4. OPERATION TEMPERATURE: -40°C TO +85°C

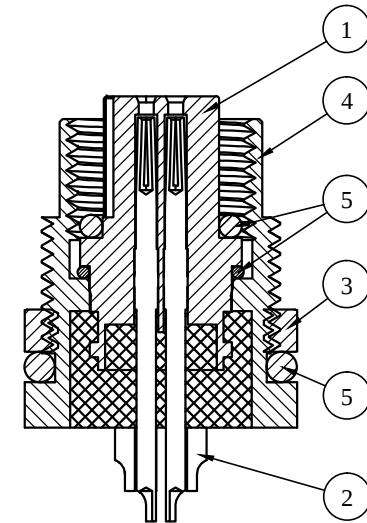


5	O-RING	EPDM
4	SHELL	BRASS, NICKEL PLATED
3	NUT	BRASS, NICKEL PLATED
2	CONTACT	BRASS, 10u" GOLD PLATED UNDER NICKEL
1	HOUSING	PBT, UL94V-0, BLACK
NO	PART NAME	DESCRIPTION

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND	
UNIT:	DECIMAL	LINEAR	ANGLES		
	X.	±0.50	±5°		
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
WWW.ATTEND.COM.TW					
DRAWN	Tim	2017/08/17	DRAWN NAME: M12 A- Code Receptacle,10Pin Female Straight Solder Type Front Fastened		
CHECKED	Fros	2017/08/17			
APPROVED	Ken	2017/08/17	PRODUCT NO. 216A-10FAF		
	SCALE	SHEET	SIZE	FILE NAME	
	2/1	1/1	A4	216A-10FAF_B_2	


1. Wire Processing

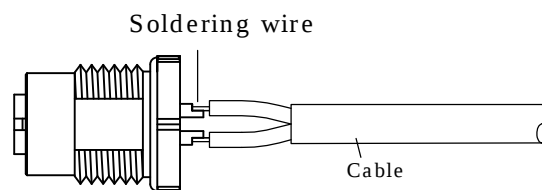

2. Installation Direction

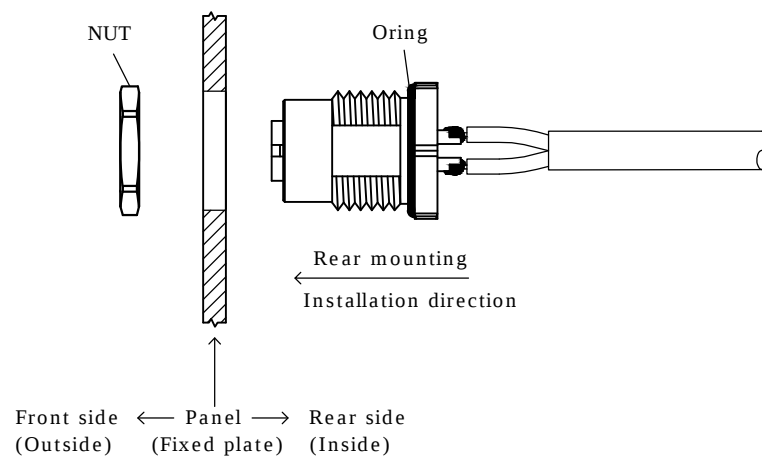

3. Connector Mated to Panel Mount

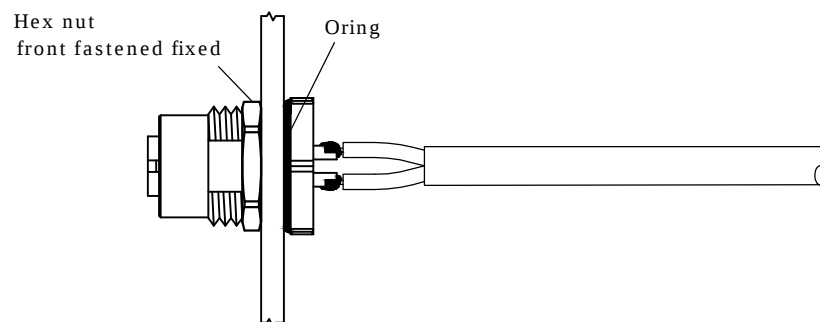

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND		
UNIT:	DECIMAL	LINEAR	ANGLES			
m m	X.	±0.50	±5°	WWW.ATTEND.COM.TW		
	X.X	±0.25	±3°			
	X.XX	±0.12	±1°			
DRAWN	Tim	2025/02/25	DRAWN NAME:			
CHECKED	Fros	2025/02/25	M Series For Female Solder Type Front Fastener Design Guide			
APPROVED	Ken	2025/02/25	PRODUCT NO.			
	SCALE	SHEET 1/1	SIZE A4	FILE NAME	M Series FAF_DG	