
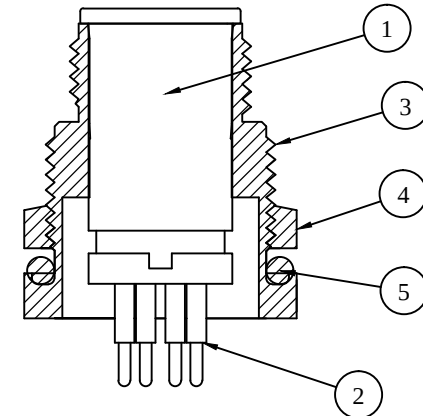



NOTES:


- 1 Rated current: 1.5A
- 2 Rated voltage: 30V
- 3 Waterproof: IPX7
- 4 Operation temperature: -40°C to +85°C

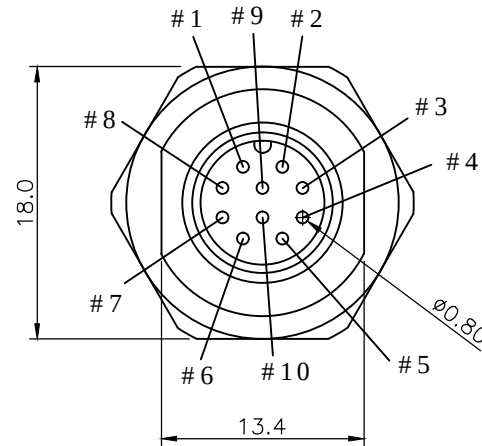


RECOMMEND PANEL CUT-OUT

5	ORING	EPDM				
4	NUT	Brass, Nickel plating				
3	SHELL	Brass, Nickel plating				
2	CONTACT	Brass, 10u" Gold plating over Nickel				
1	HOUSING	PBT, UL94V-0, Black				
NO. PART NAME		DESCRIPTION				
UNLESS OTHERWISE SPECIFIED TOLERANCE		 ATTEND				
UNIT:	DECIMAL				LINEAR	ANGLES
m m	X.				±0.50	±5°
	X.X				±0.25	±3°
	X.XX				±0.12	±1°
WWW.ATTEND.COM.TW						
DRAWN	Fros	2017/06/07	DRAWN NAME: M12 A- Code Receptacle 10Pin Male DIP Front Fastened			
CHECKED	Tim	2017/06/07				
APPROVED	Ken	2017/06/07				
		PRODUCT NO.	216A-10MSF			
 SCALE 2.5	SHEET 1/1	SIZE A4	FILE NAME	216A-10MSF_B_2		


1. Soldering Board



2. Installation Direction

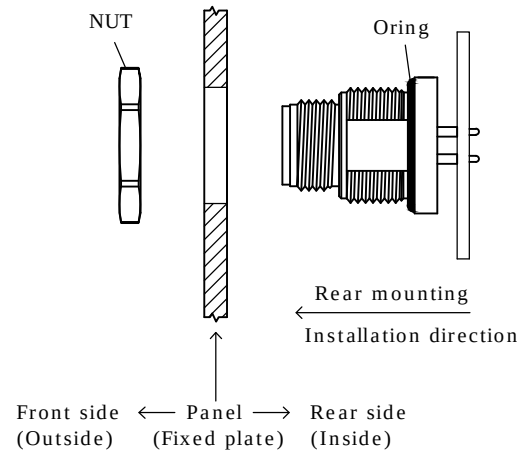

3. Connector Mated to Panel Mount

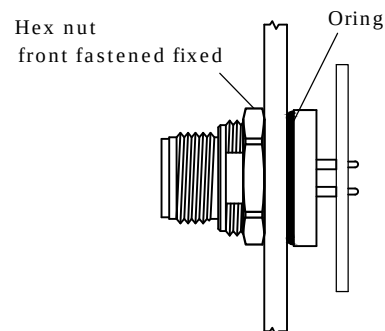

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND	
UNIT:	DECIMAL	LINEAR	ANGLES		
m m	X.	±0.50	±5°	WWW.ATTEND.COM.TW	
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
DRAWN	Tim	2025/02/25	DRAWN NAME: M Series For Male DIP Type Front Fastened Design Guide		
CHECKED	Fros	2025/02/25			
APPROVED	Ken	2025/02/25	PRODUCT NO.		
	SCALE	SHEET 1/1	SIZE A4	FILE NAME	M Series MSF_DG