






| REV. | DESCRIPTION     | DRAWN | DATE       |
|------|-----------------|-------|------------|
| 1    | INITIAL RELEASE | FROS  | 2023/10/23 |

### SPECIFICATION:

1. Current Rating: 1.5A
2. Voltage Rating: 30V
3. Waterproof: IPX7 or IP67
4. Operating temperature range: -40°C~+85°C



Recommend cable OD=5.0~6.8mm

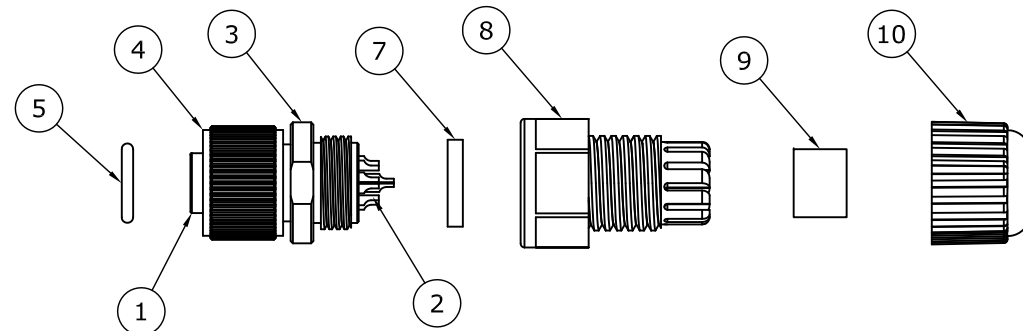

|    |             |                                       |
|----|-------------|---------------------------------------|
| 10 | SEALING NUT | PA66                                  |
| 9  | SEAL        | Silicone, gray                        |
| 8  | CLAMP RING  | PA66                                  |
| 7  | GASKET      | Silicone, gray                        |
| 6  | EPOXY       | black                                 |
| 5  | ORING       | EPDM                                  |
| 4  | NUT         | Aluminum alloy, sating nickel plated  |
| 3  | SHELL       | Brass, nickel plated                  |
| 2  | CONTACT     | Brass, gold flash plating over Nickel |
| 1  | HOUSING     | PBT, UL94V-0, Black                   |

| NO.                                  | PART NAME      | DESCRIPTION |
|--------------------------------------|----------------|-------------|
| UNLESS OTHERWISE SPECIFIED TOLERANCE |                |             |
| UNIT:                                | DECIMAL        | LINEAR      |
|                                      | mm             | mm          |
|                                      | mm             | mm          |
|                                      | mm             | mm          |
| www.attend.com.tw                    |                |             |
| DRAWN                                | Fros           | 2023/10/23  |
| CHECKED                              | Tim            | 2023/10/23  |
| APPROVED                             | Ken            | 2023/10/23  |
| SCALE                                | 1/1            | SIZE A4     |
| SHEET                                | 1/1            | FILE NAME   |
| 216A-12FF1                           | 216A-12FF1_B_1 |             |



DRAWN NAME:  
M12 A- Code Plug for Cable, 12 Pin  
Female For Field Installable, Plastic, G/F

