


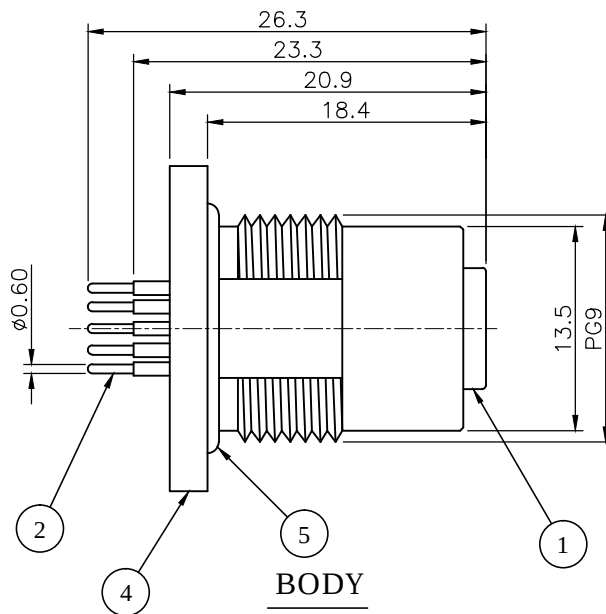


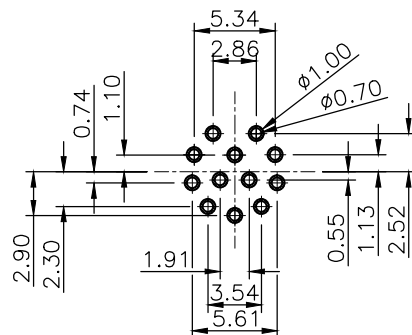

BODY

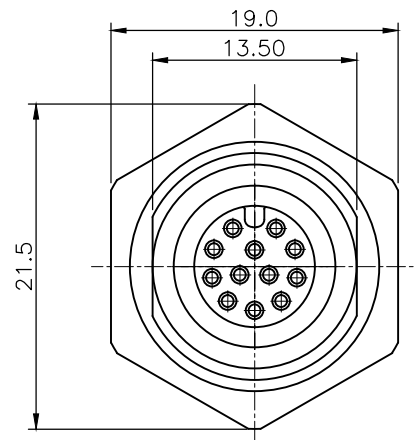

RECOMMENDED LAYOUT




RECOMMENDED PANEL CUT OUT

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2015/09/18
2	ECR1700027	TIM	2017/10/26
3	ECR220421001	TIM	2022/04/21

SPECIFICATION:

1. CURRENT RATING: 1.5A
2. VOLTAGE: 30V
3. WATER PROOF: IPX7
- △ 4. OPERATION TEMPERATURE: -40°C TO +85°C

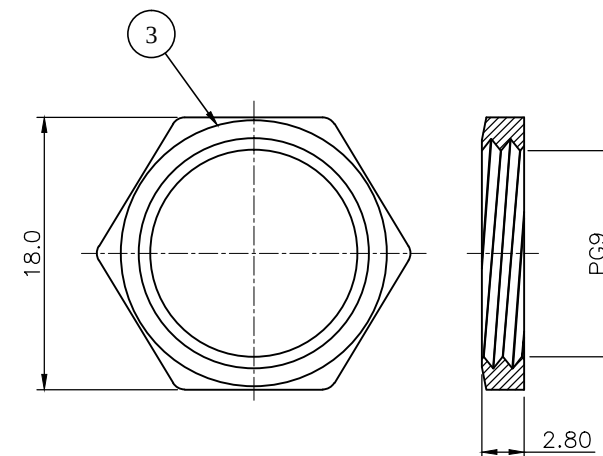

NUT


5	O-RING	EPDM, BLACK
4	SHELL	BRASS, NICKEL PLATED
3	NUT	BRASS, NICKEL PLATED
2	CONTACT	BRASS, 10u" GOLD PLATED UNDER NICKEL
1	HOUSING	PBT, UL94V-0, BLACK

NO		PART NAME	DESCRIPTION
UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT:	DECIMAL	LINEAR	ANGLES
	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°
DRAWN		Fros	2015/09/18
CHECKED		Zola	2015/09/18
APPROVED		Ken	2015/09/18
SCALE		2/1	SHEET 1/1
SIZE		A4	
DRAWN NAME:		M12 A-Code Water Proof Connector, 12Pin Female Straight PCB Type, Front Fastened	
PRODUCT NO.		216A-12FSF	
FILE NAME		216A-12FSF_B_3	




WWW.ATTEND.COM.TW


1. Soldering Board



2. Installation Direction

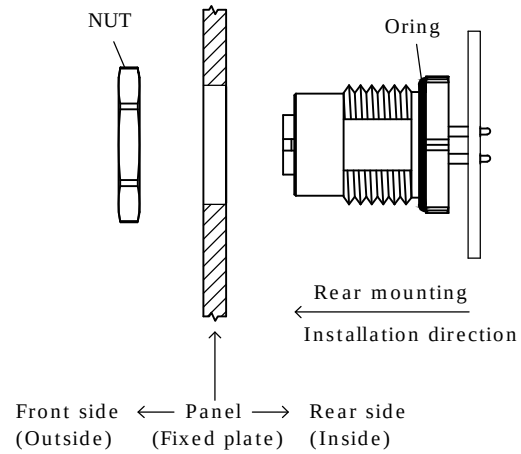

3. Connector Mated to Panel Mount

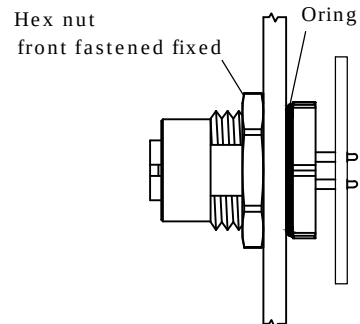

UNLESS OTHERWISE SPECIFIED TOLERANCE						
UNIT:	DECIMAL	LINEAR	ANGLES			
m m	X.	±0.50	±5°	WWW.ATTEND.COM.TW		
	X.X	±0.25	±3°			
	X.XX	±0.12	±1°			
DRAWN	Tim	2025/02/25	DRAWN NAME:			
CHECKED	Fros	2025/02/25	M Series For Female DIP Type Front Fastened Design Guide			
APPROVED	Ken	2025/02/25	PRODUCT NO.			
	SCALE	SHEET 1/1	SIZE A4	FILE NAME		M Series FSF_DG