


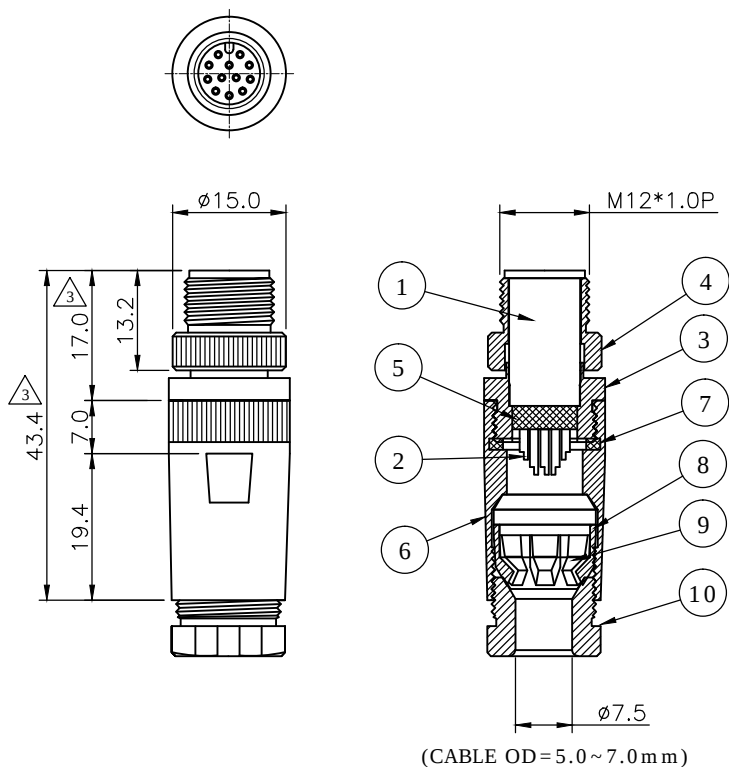

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2019/04/01
2	ECR220421001	TIM	2022/04/21
3	ECR231218001	TIM	2023/12/18

SPECIFICATION:

1. RATED CURRENT: 1.5A
2. RATED VOLTAGE: 30V
3. WATER PROOF: IPX7
4. OPERATING TEMPERATURE: -40°C TO +85°C

3	10	GLAND NUT	Aluminum alloy, sating nickel plated	
	9	GLAND CAGE	POM, black	
	8	GLAND	SILICONE, black	
	7	O-RING	SILICONE, black	
	6	BODY	Aluminum alloy, sating nickel plated	
	5	EPOXY	EP400A&B, black	
	4	NUT	Aluminum alloy, sating nickel plated	
	3	SHELL	Aluminum alloy, sating nickel plated	
	2	CONTACT	Brass, 10u" gold plating over Nickel	
	1	HOUSING	PBT, UL94V-0, Black	
NO.		PART NAME	DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE				
UNIT:		DECIMAL	LINEAR	ANGLES
m m		X.	±0.50	±5°
		X.X	±0.25	±3°
		X.XX	±0.12	±1°
 ATTEND				
WWW.ATTEND.COM.TW				
DRAWN		Fros	2019/04/01	DRAWN NAME: M12 A- Code Plug for Cable 12 Pin Male For Field Installable
CHECKED		Tim	2019/04/01	
APPROVED		Ken	2019/04/01	
		SCALE 1/1	SHEET 1/1	SIZE A4
FILE NAME		216A-12MF0_B_3		

