
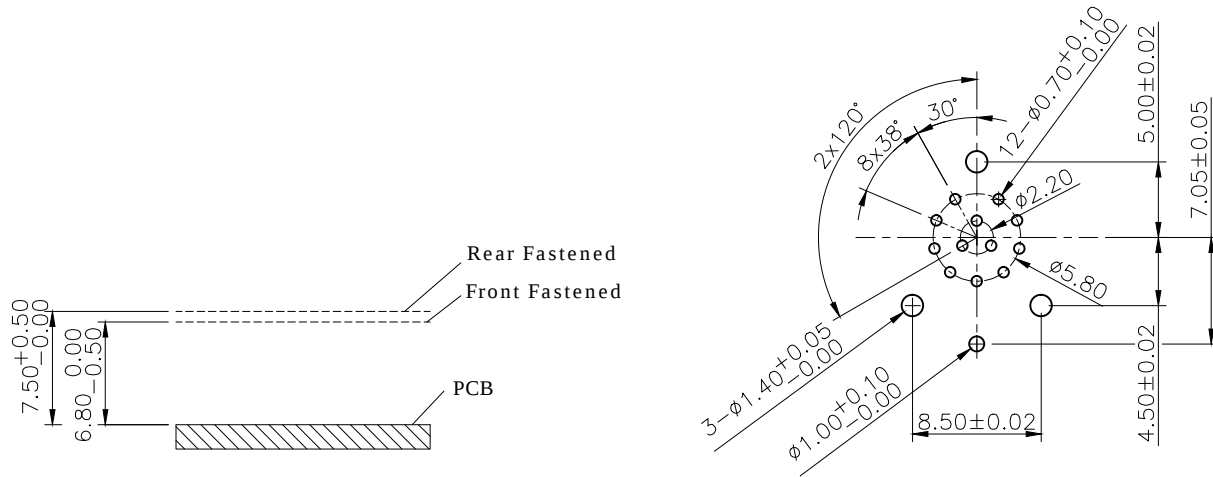


REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	Michael	2025/05/06


NOTES:

1. Rated current: 1.5A
2. Rated voltage: 30V
3. Operation temperature: -40°C to +85°C

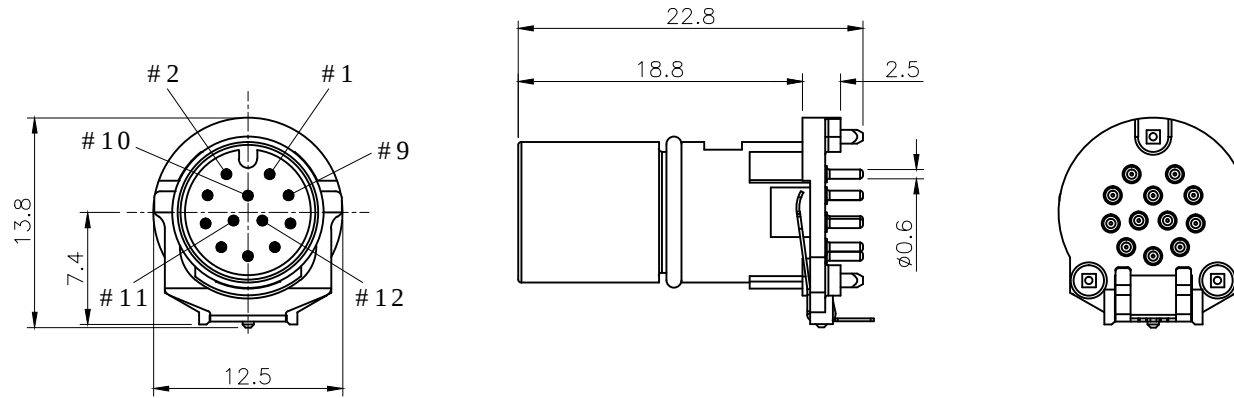

Recommended Panel Distance

Recommended Layout (Top View)
PCB Thickness: 1.6mm
General Tolerance: ±0.05mm

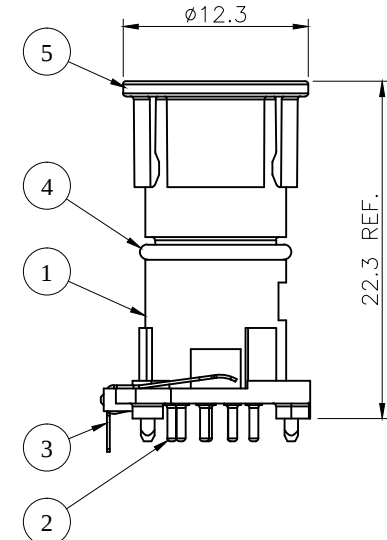

5	CAP	PA66		
4	ORING	VITON		
3	GROUND	Phosphor Bronze, Nickel plating		
2	CONTACT	Brass, Gold plating over Nickel		
1	HOUSING	PA9T, UL94V-0, Black		
NO.		PART NAME	DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND
UNIT:	DECIMAL	LINEAR	ANGLES	
	X.	±0.50	±5°	
	X.X	±0.25	±3°	
	X.XX	±0.12	±1°	
m m				www.attend.com.tw
DRAWN	Michael	2025/05/06		DRAWN NAME: M12 Two Piece Insert, A-Code, 12Pin Male DIP Type
CHECKED	Fros	2025/05/06		
APPROVED	Ken	2025/05/06		
		PRODUCT NO.		216A-12MSA
	SCALE 2/1	SHEET 1/1	SIZE A4	FILE NAME 216A-12MSA_B_1



www.attend.com.tw