



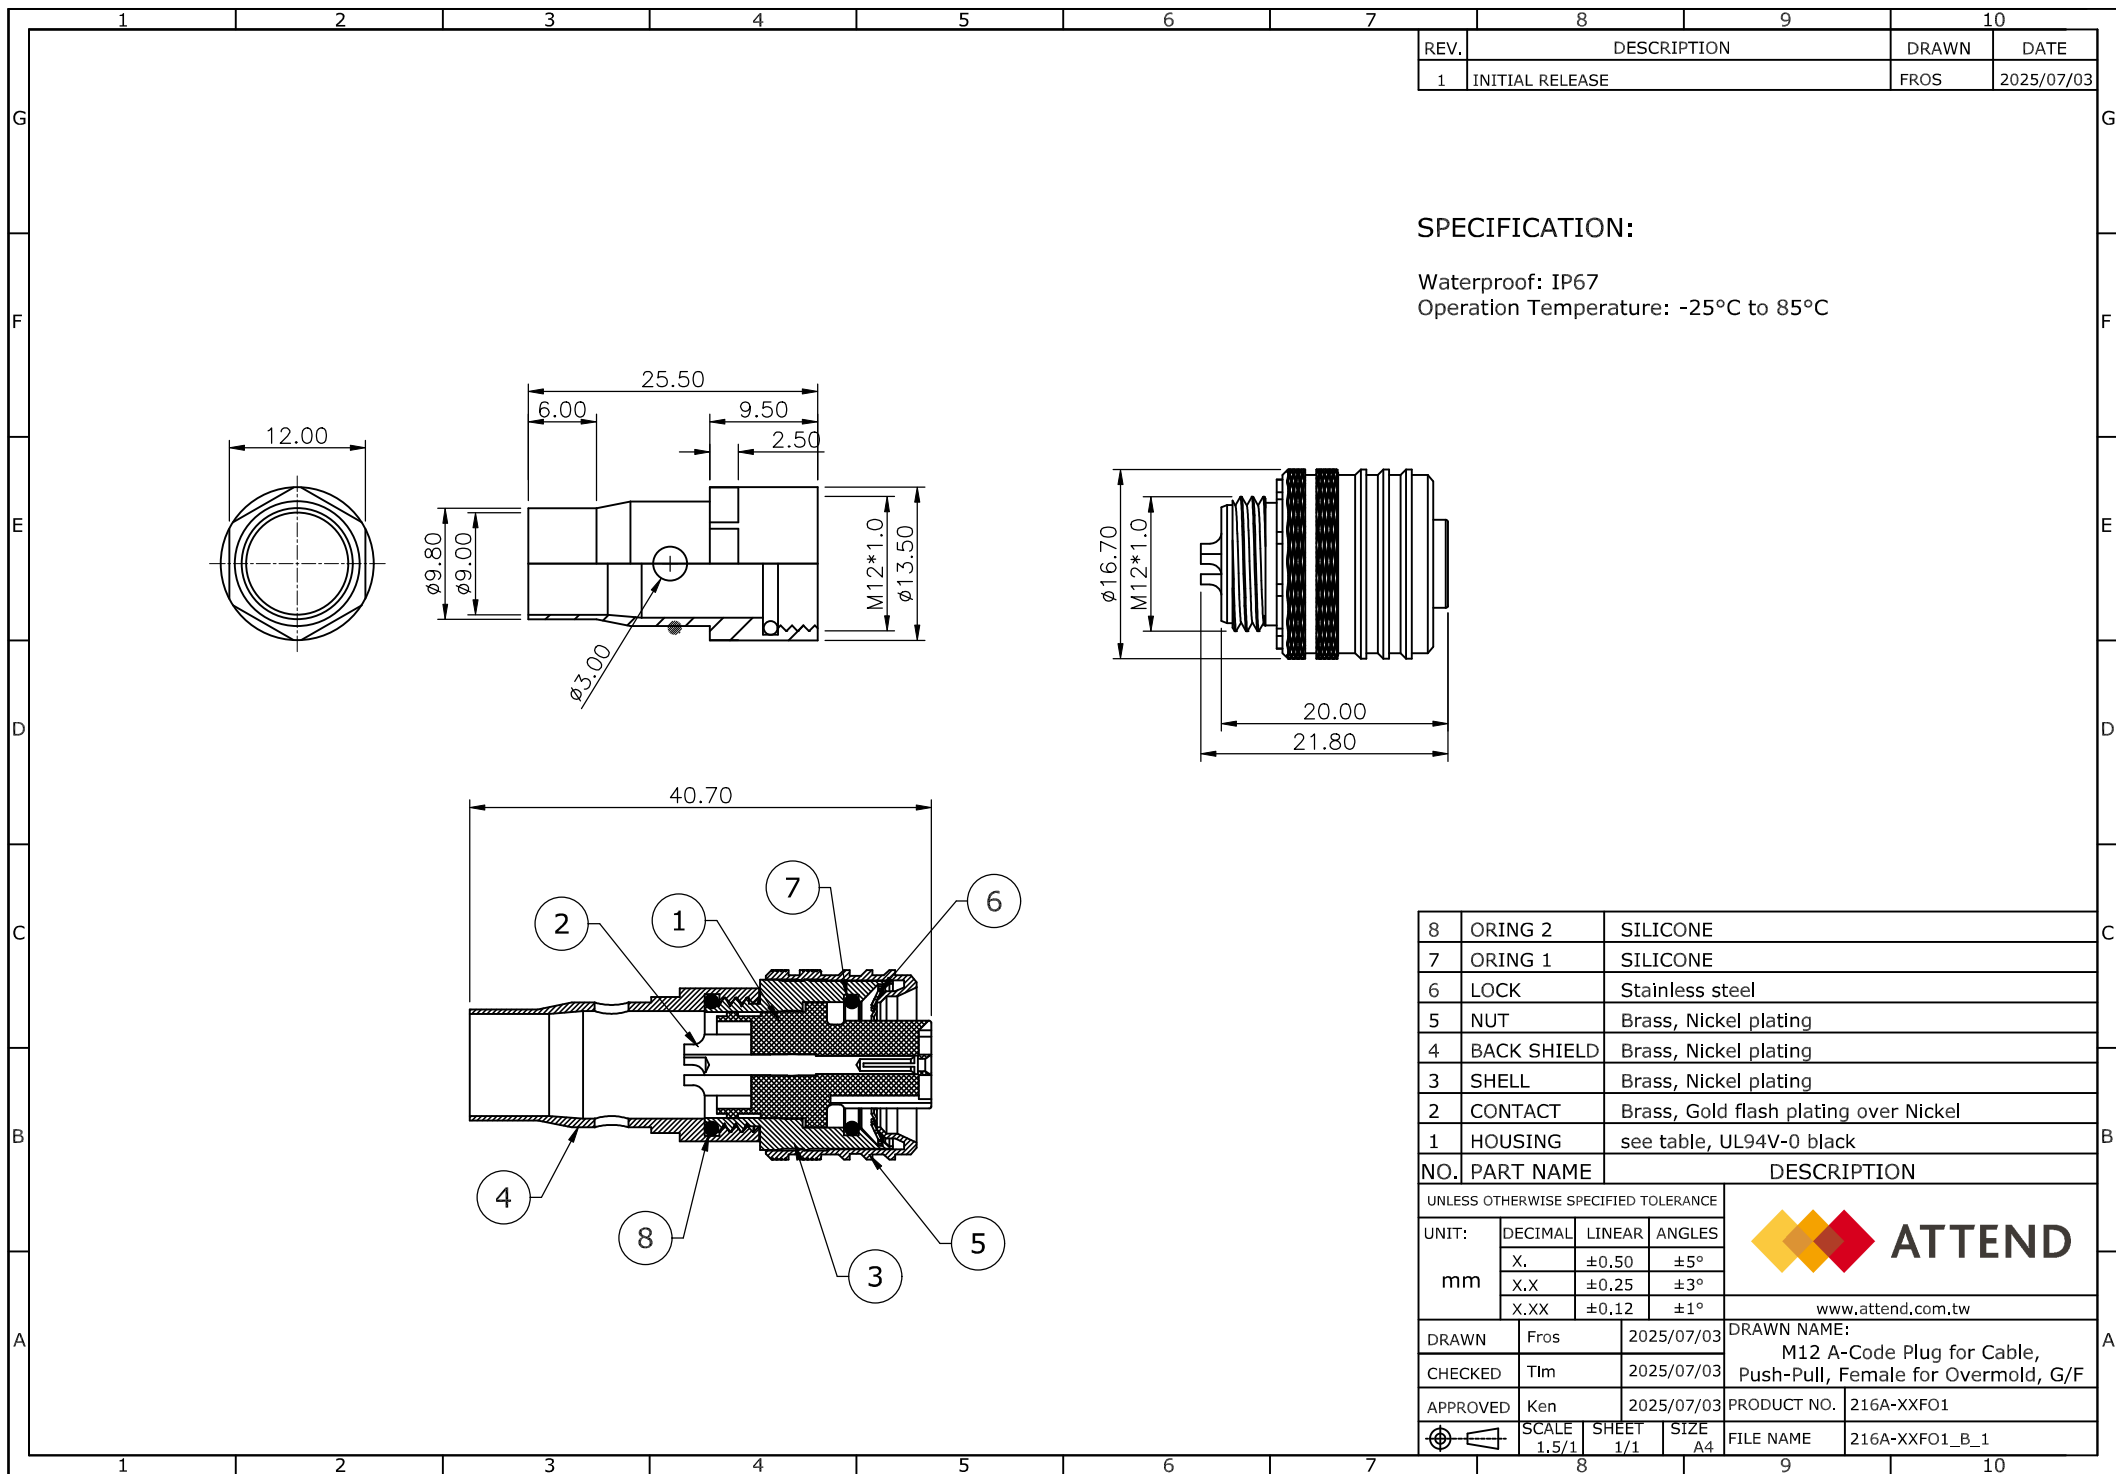


TABLE




216A-02FO1

250V/4A
PBT UL94-V0




216A-03FO1

250V/4A
PBT UL94-V0




216A-04FO1

250V/4A
PBT UL94-V0




216A-05FO1

60V/4A
PBT UL94-V0




216A-06FO1

30V/2A
PBT UL94-V0




216A-07FO1

30V/2A
PBT UL94-V0



216A-08FO1

30V/2A
PBT UL94-V0



216A-12FO1

30V/1.5A
Nylon 66 UL94V-0

REV.	DESCRIPTION			DRAWN	DATE

UNLESS OTHERWISE SPECIFIED TOLERANCE					
UNIT: mm	DECIMAL	LINEAR	ANGLES		
	X.	±0.50	±5°		
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
www.attend.com.tw					
DRAWN	Fros	2025/07/03	DRAWN NAME: M12 A-Code Plug for Cable, Push-Pull, Female for Overmold, G/F		
CHECKED	Tlm	2025/07/03			
APPROVED	Ken	2025/07/03	PRODUCT NO.	216A-XXFO1	
	SCALE 1.5/1	SHEET 1/1	SIZE A4	FILE NAME	216A-XXFO1_B_1