



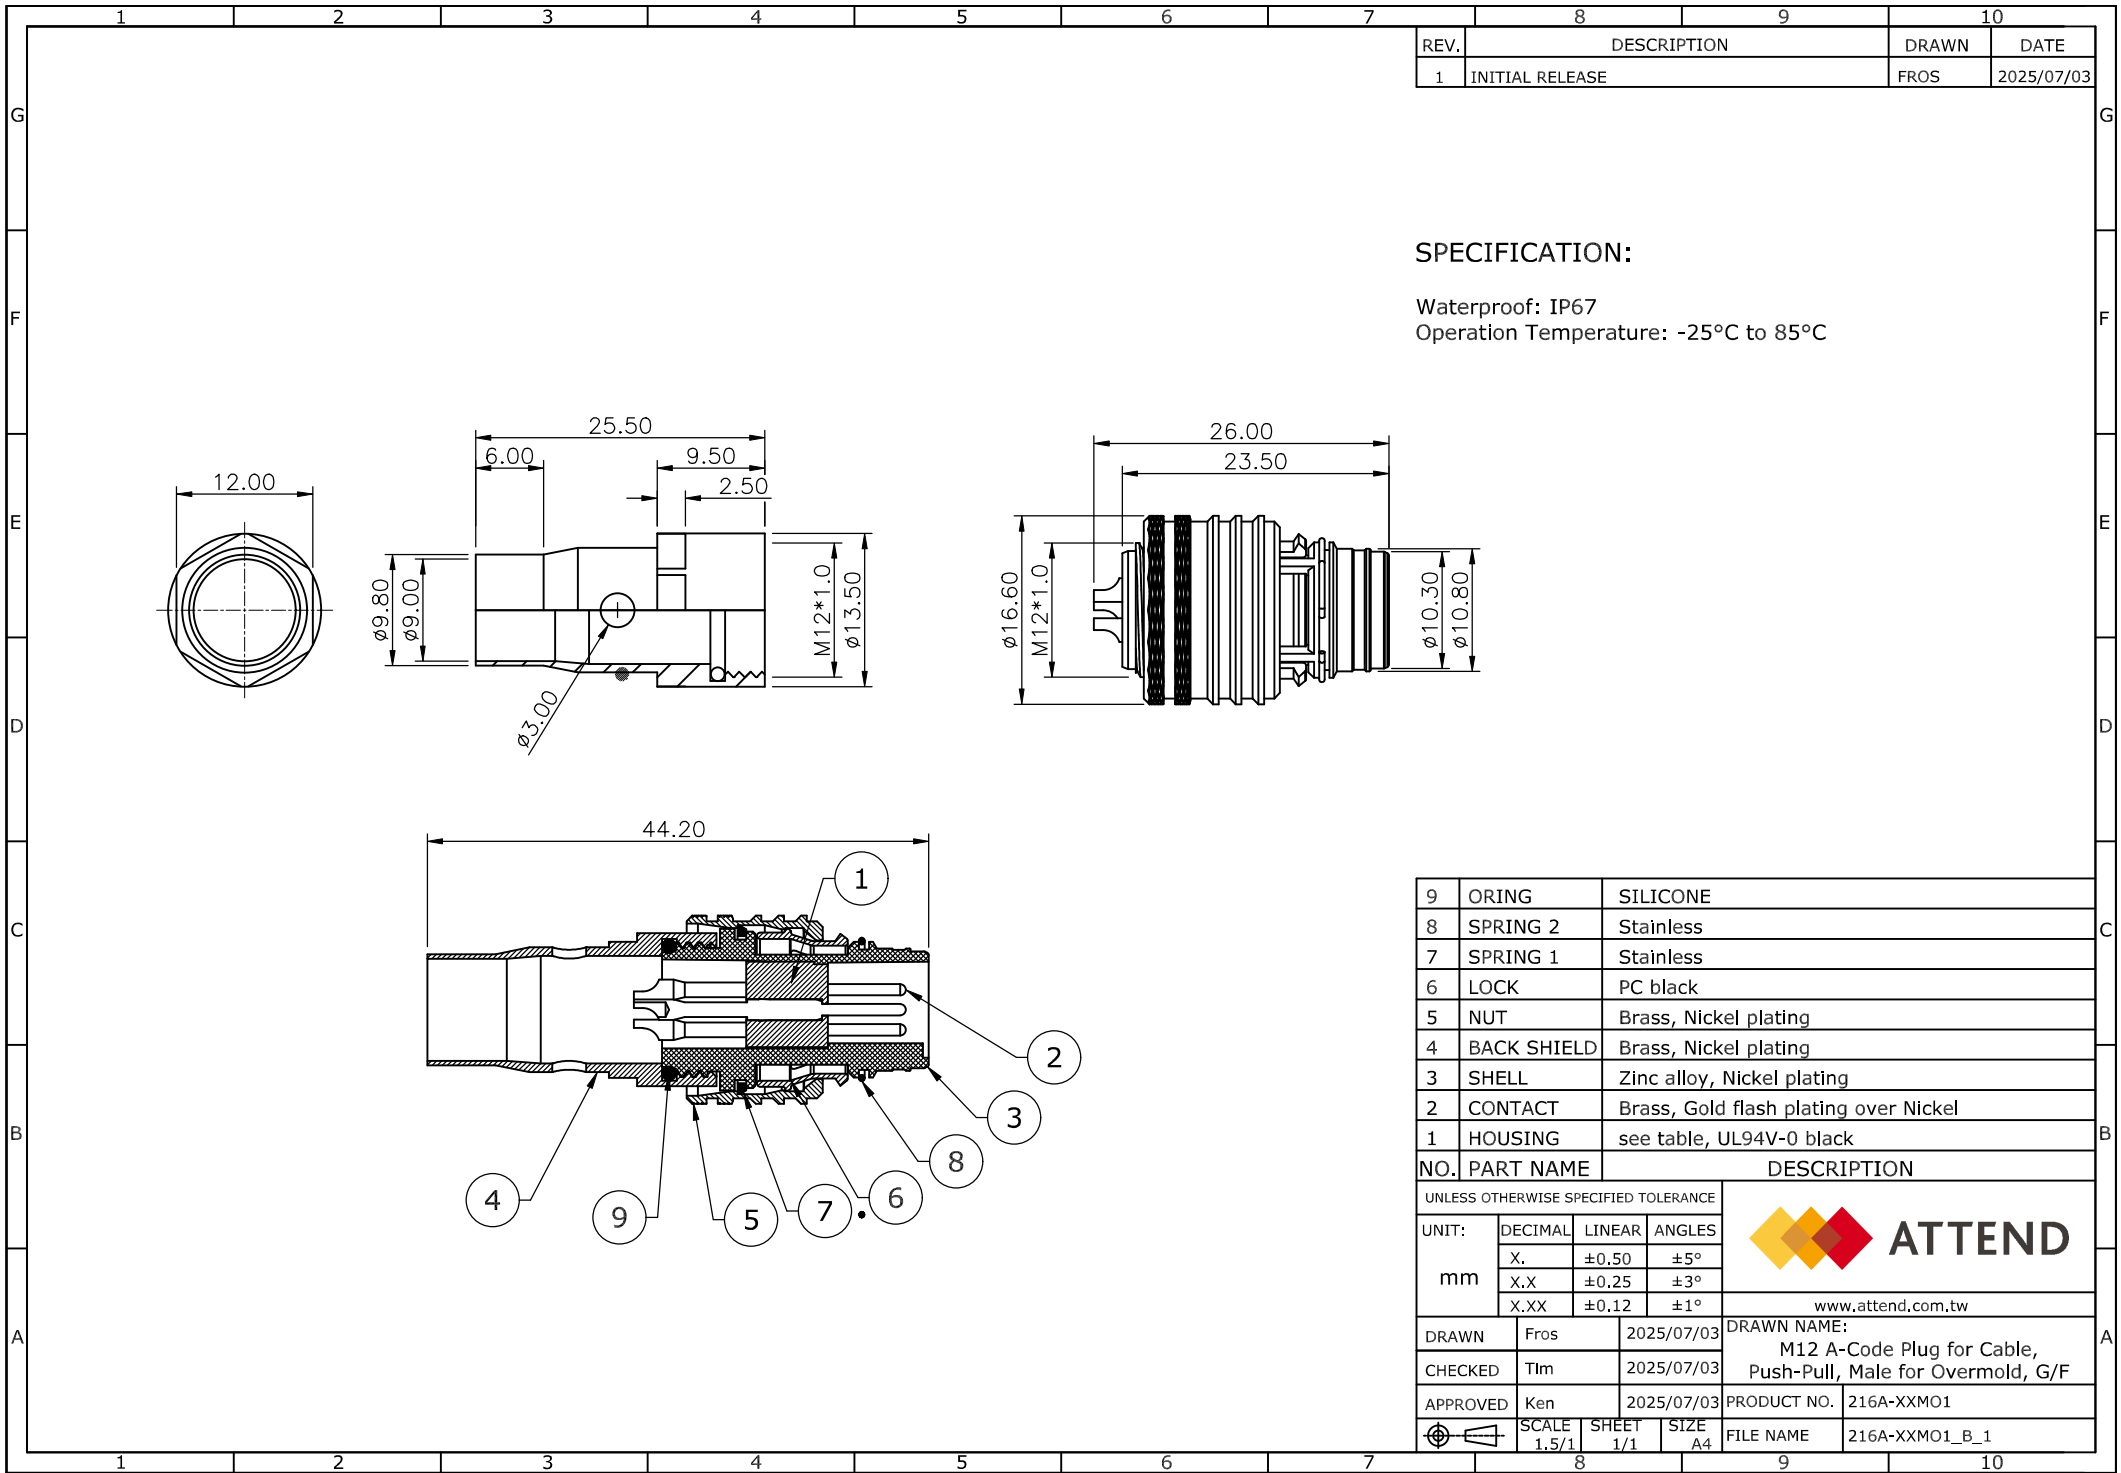


TABLE




216A-02MO1

250V/4A
PA UL94V-0




216A-03MO1

250V/4A
PA UL94V-0




216A-04MO1

250V/4A
PA UL94V-0




216A-05MO1

250V/4A
PA UL94V-0




216A-06MO1

30V/2A
PA UL94V-0




216A-07MO1

30V/2A
PA UL94V-0



216A-08MO1

30V/2A
PA UL94V-0



216A-12MO1

30V/1.5A
PA UL94V-0

REV.	DESCRIPTION			DRAWN	DATE
					G
					F
					E
					D
					C
					B
					A

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND		
UNIT: mm	DECIMAL	LINEAR	ANGLES			www.attend.com.tw
	X.	±0.50	±5°			
	X.X	±0.25	±3°			
	X.XX	±0.12	±1°			
DRAWN	Fros	2025/07/03	DRAWN NAME: M12 A-Code Plug for Cable, Push-Pull, Male for Overmold, G/F			
CHECKED	Tlm	2025/07/03	PRODUCT NO. 216A-XXMO1			
APPROVED	Ken	2025/07/03	FILE NAME 216A-XXMO1_B_1			
	SCALE 1.5/1	SHEET 1/1	SIZE A4			