

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2016/09/19
2	ECR220421001	TIM	2022/04/21


SPECIFICATION:

Current Rating: 4A




Voltage Rating: 250V

Waterproof: IPX7


Operation Temperature: -40°C to 85°C

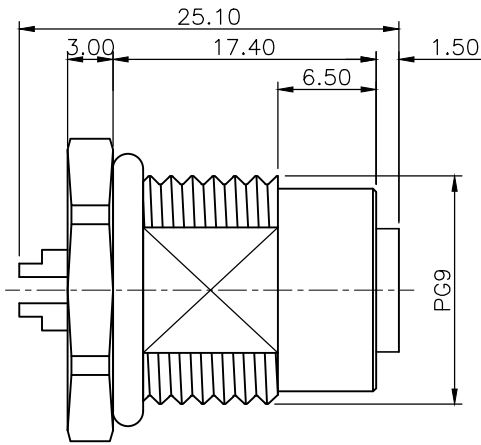

BODY

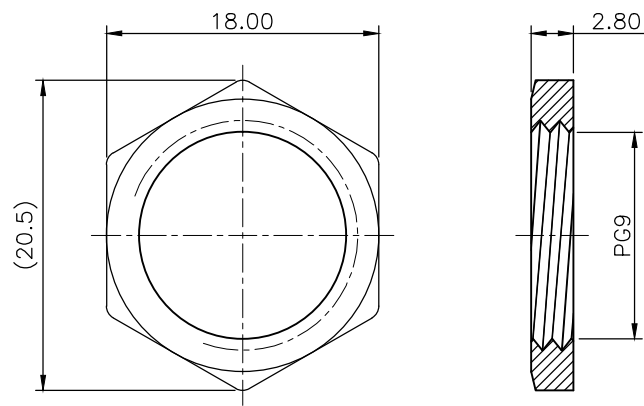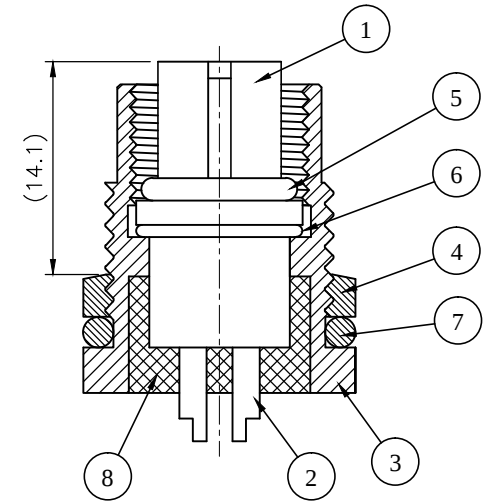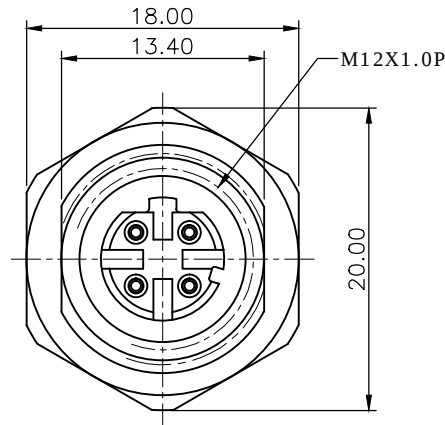

NUT

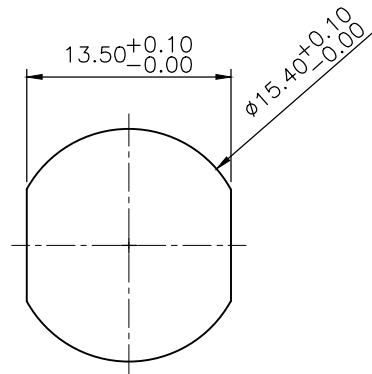


RECOMMEND PANEL CUT-OUT

8	Epoxy			
7	ORING	EPDM		
6	ORING	SILICONE		
5	ORING	EPDM		
4	NUT	Brass, Nickel plating		
3	SHELL	Brass, Nickel plating		
2	CONTACT	Brass, 10u" Gold plating under Nickel		
1	HOUSING	PBT, UL94V-0, Black		
NO.	PART NAME	DESCRIPTION		
UNLESS OTHERWISE SPECIFIED TOLERANCE		 ATTEND		
UNIT:	DECIMAL		LINEAR	ANGLES
mm	X.		±0.50	±5°
	X.X		±0.25	±3°
	X.XX		±0.12	±1°
		WWW.ATTEND.COM.TW		
DRAWN	Tim	2016/09/19	DRAWN NAME:	
CHECKED	Fros	2016/09/19	M12 D-Code Receptacle, 4 Pin Female Solder Type Front Fastened	
APPROVED	Ron	2016/09/19	PRODUCT NO.	216D-04FAF
	SCALE 2/1	SHEET 1/1	SIZE A4	FILE NAME 216D-04FAF_B_2




WWW.ATTEND.COM.TW


1. Wire Processing

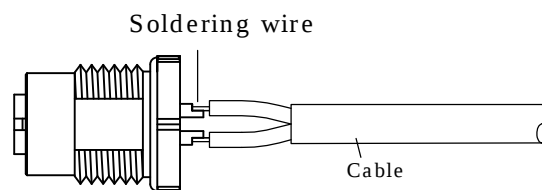

2. Installation Direction

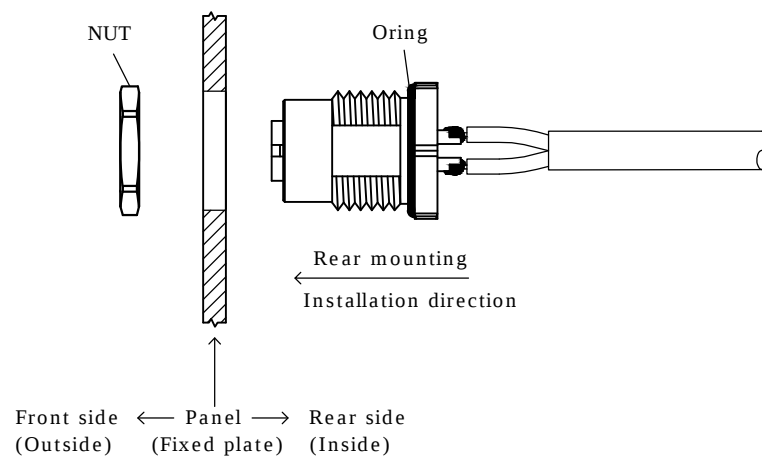

3. Connector Mated to Panel Mount

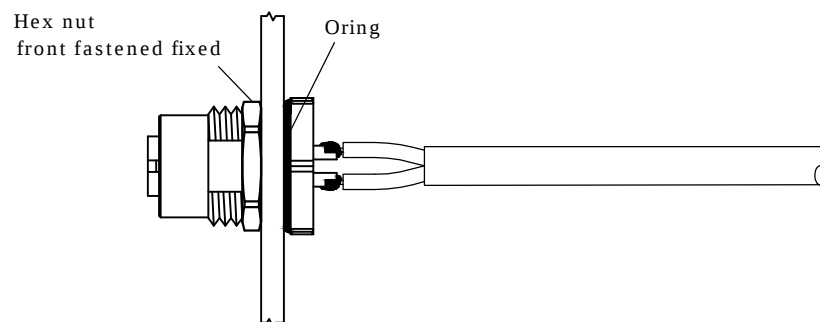

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND	
UNIT:	DECIMAL	LINEAR	ANGLES		
m m	X.	±0.50	±5°	WWW.ATTEND.COM.TW	
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
DRAWN	Tim	2025/02/25	DRAWN NAME:		
CHECKED	Fros	2025/02/25	M Series For Female Solder Type Front Fastener Design Guide		
APPROVED	Ken	2025/02/25	PRODUCT NO.		
	SCALE	SHEET 1/1	SIZE A4	FILE NAME	M Series FAF_DG