
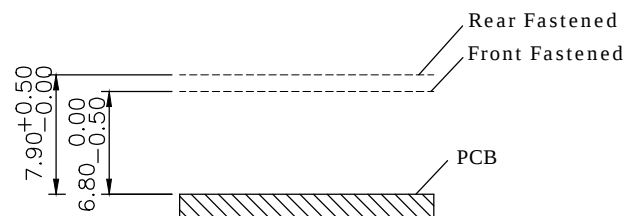



REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2025/05/09

NOTES:


1. Rated current: 4A
2. Rated voltage: 250V
3. Operation temperature: -40°C to +85°C

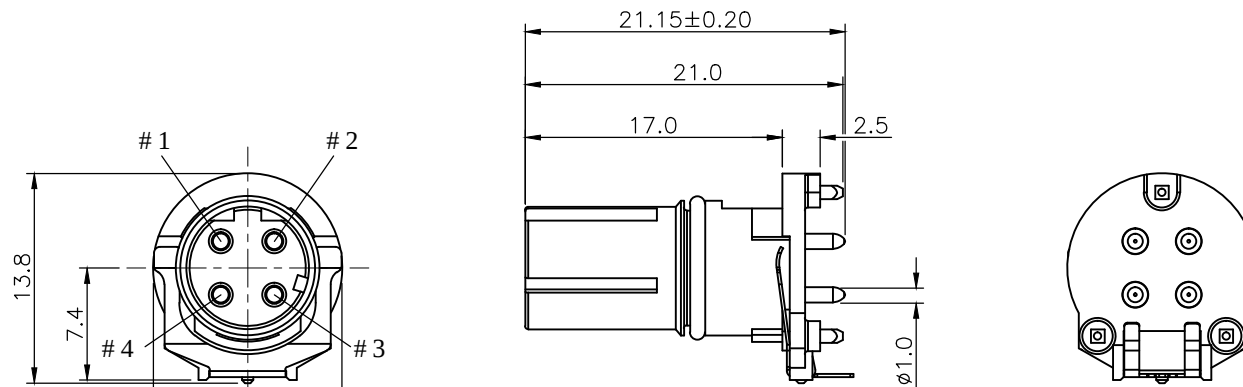

Recommended Panel Distance

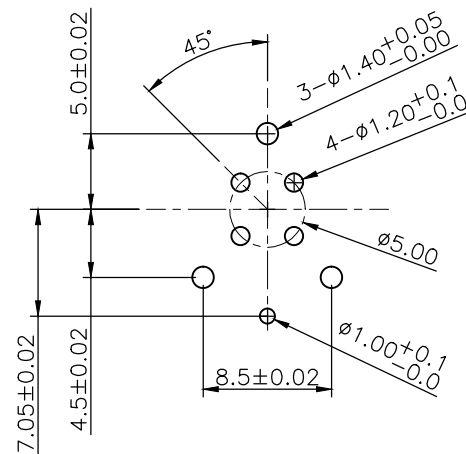

Recommended Layout (Top View)
PCB Thickness: 1.6mm
General Tolerance: ±0.05mm

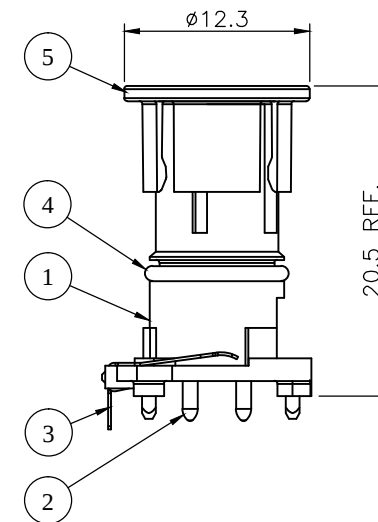

5	CAP	PA66	
4	ORING	VITON	
3	GROUND	Phosphor Bronze, Nickel plating	
2	CONTACT	Brass, Gold plating over Nickel	
1	HOUSING	PA9T, UL94V-0, Black	
NO. PART NAME		DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT:	DECIMAL	LINEAR	ANGLES
	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°
m m			 ATTEND
			WWW.ATTEND.COM.TW
DRAWN	Tim	2025/05/09	DRAWN NAME:
CHECKED	Fros	2025/05/09	M12 Two Piece Insert D-Code, 4Pin Female DIP Type
APPROVED	Ken	2025/05/09	PRODUCT NO. 216D-04FSA
	SCALE 2.5	SHEET 1/1	SIZE A4
FILE NAME			216D-04FSA_B_1



WWW.ATTEND.COM.TW