
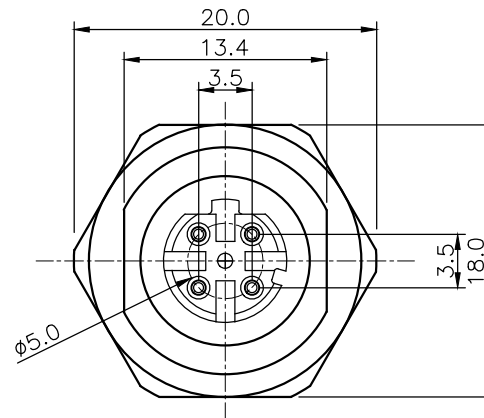



REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2015/06/16
2	ECR220421001	TIM	2022/04/21

SPECIFICATION:



1. CURRENT RATING: 4A
2. VOLTAGE: 250V
3. WATER PROOF: IPX7
4. OPERATION TEMPERATURE: -40°C TO +85°C

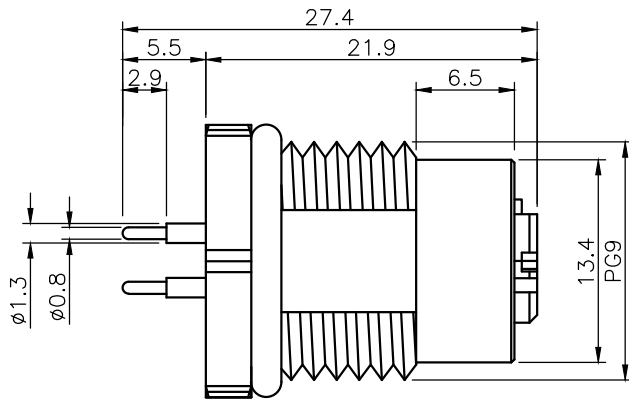


BODY

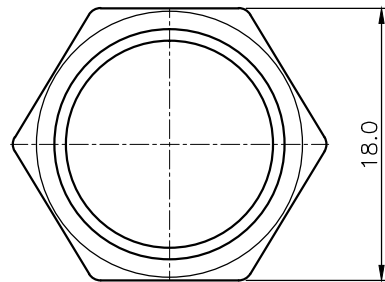


NUT



RECOMMEND PCB LAYOUT

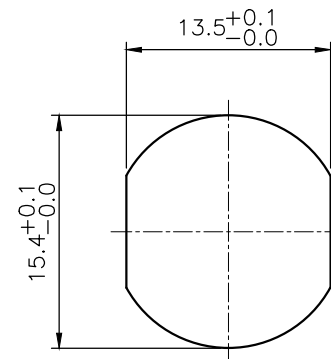


RECOMMEND PANEL CUT OUT

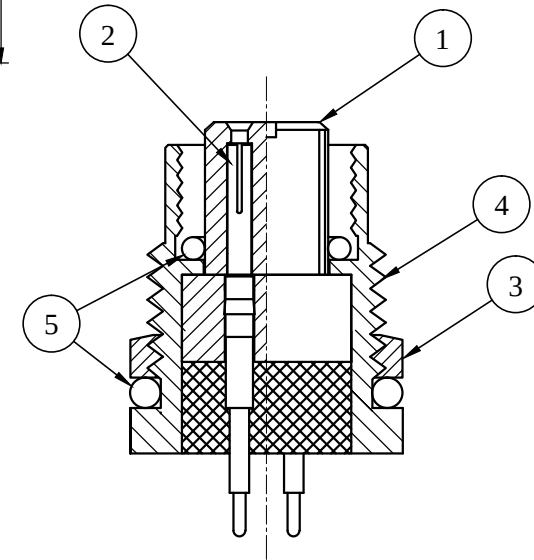


5	O-RING	EPDM
4	SHELL	BRASS, NICKEL PLATED
3	NUT	BRASS, NICKEL PLATED
2	CONTACT	BRASS, 10u" GOLD PLATED UNDER NICKEL
1	HOUSING	PBT, UL94V-0, BLACK
NO	PART NAME	DESCRIPTION

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND	
UNIT: m m	DECIMAL	LINEAR	ANGLES		
	X.	±0.50	±5°		
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
				WWW.ATTEND.COM.TW	
DRAWN	Fros	2015/06/16	DRAWN NAME: M12 4P FEMALE, DIP TYPE WATERPROOF CONNECTOR		
CHECKED	Zola	2015/06/16			
APPROVED	Ken	2015/06/16	PRODUCT NO.	216D-04FSF	
	SCALE 2/1	SHEET 1/1	SIZE A4	FILE NAME	216D-04FSF_B_2


1. Soldering Board



2. Installation Direction

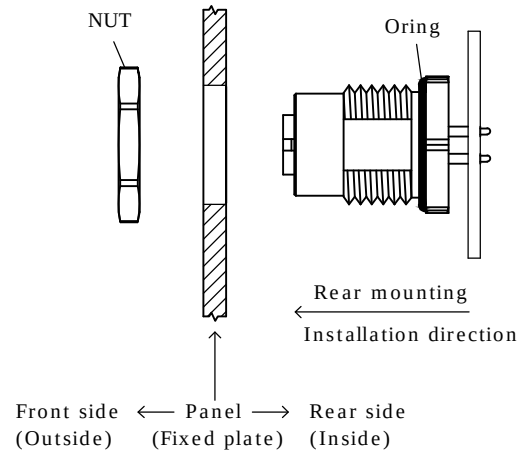

3. Connector Mated to Panel Mount

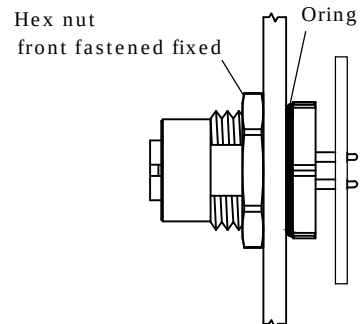

UNLESS OTHERWISE SPECIFIED TOLERANCE					 ATTEND	
UNIT:	DECIMAL	LINEAR	ANGLES			
m m	X.	±0.50	±5°	WWW.ATTEND.COM.TW		
	X.X	±0.25	±3°			
	X.XX	±0.12	±1°			
DRAWN	Tim	2025/02/25	DRAWN NAME:			
CHECKED	Fros	2025/02/25	M Series For Female DIP Type Front Fastened Design Guide			
APPROVED	Ken	2025/02/25	PRODUCT NO.			
	SCALE	SHEET 1/1	SIZE A4	FILE NAME	M Series FSF_DG	