



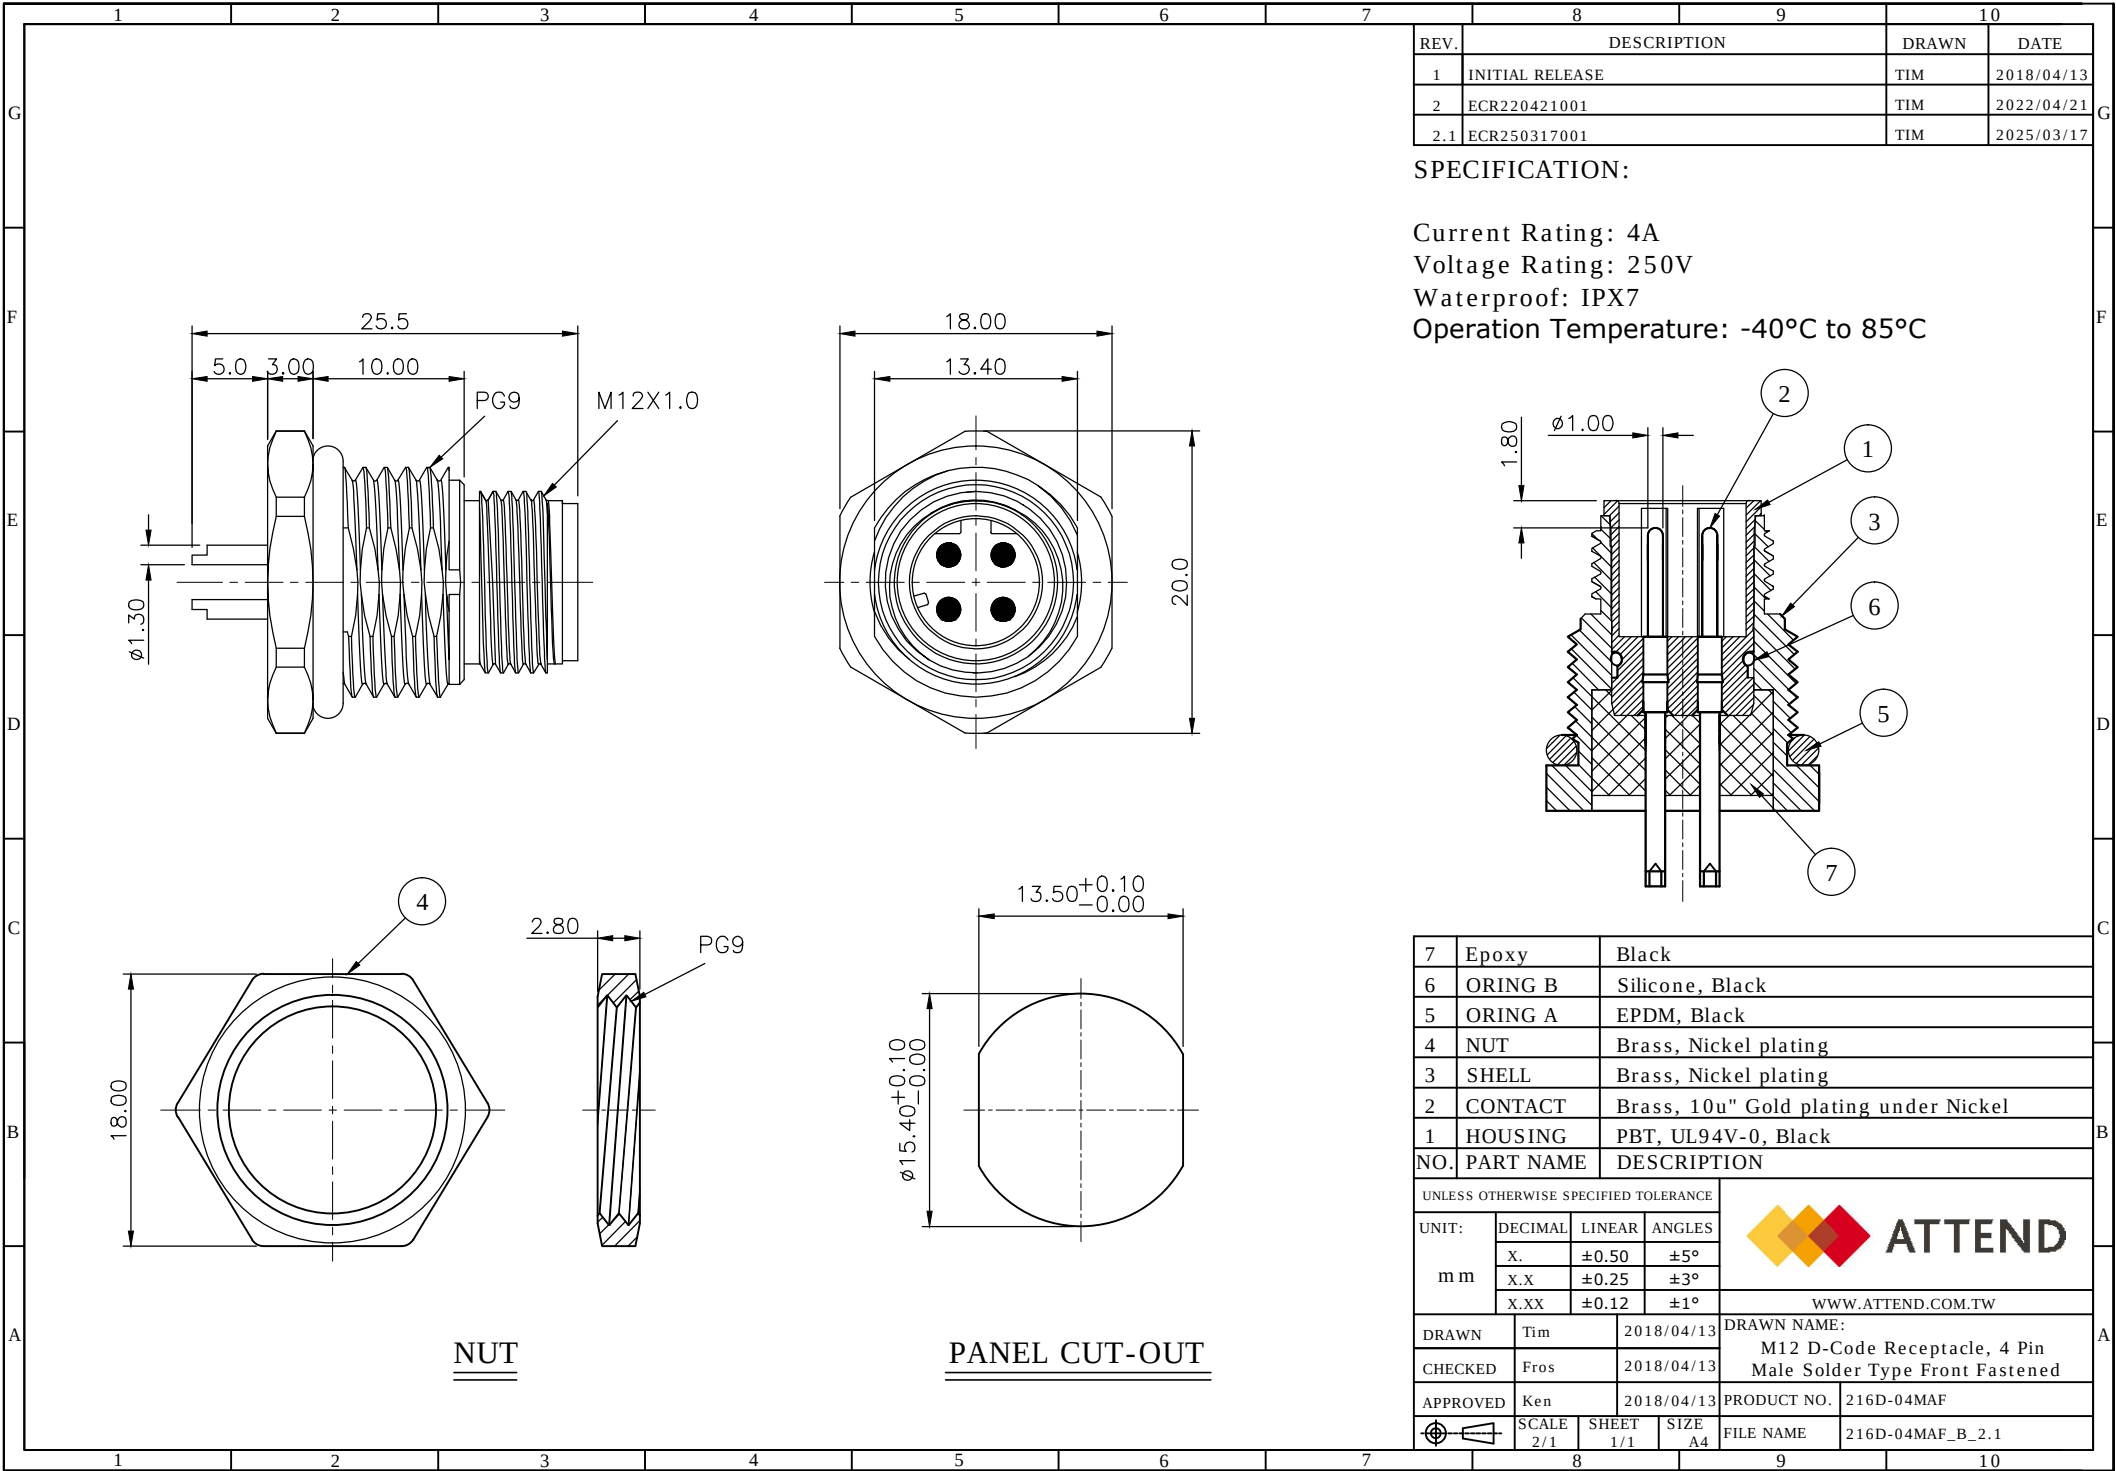

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2018/04/13
2	ECR220421001	TIM	2022/04/21
2.1	ECR250317001	TIM	2025/03/17

SPECIFICATION:

Current Rating: 4A
Voltage Rating: 250V
Waterproof: IPX7
Operation Temperature: -40°C to 85°C

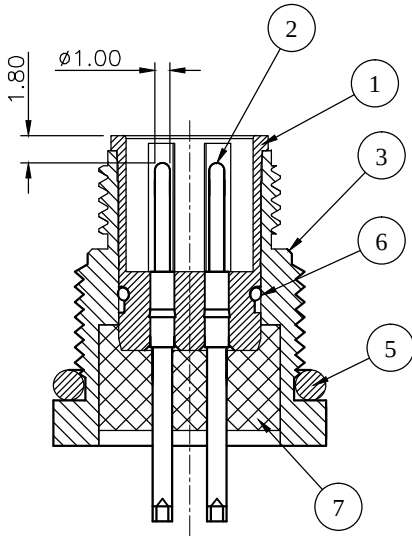

7	Epoxy	Black
6	ORING B	Silicone, Black
5	ORING A	EPDM, Black
4	NUT	Brass, Nickel plating
3	SHELL	Brass, Nickel plating
2	CONTACT	Brass, 10u" Gold plating under Nickel
1	HOUSING	PBT, UL94V-0, Black
NO.	PART NAME	DESCRIPTION

UNLESS OTHERWISE SPECIFIED TOLERANCE


UNIT:	DECIMAL	LINEAR	ANGLES
m m	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°




WWW.ATTEND.COM.TW

DRAWN	Tim	2018/04/13	DRAWN NAME:
CHECKED	Fros	2018/04/13	M12 D-Code Receptacle, 4 Pin Male Solder Type Front Fastened
APPROVED	Ken	2018/04/13	PRODUCT NO. 216D-04MAF
SCALE	2/1	SHEET 1/1	SIZE A4
FILE NAME	216D-04MAF_B_2.1		


1. Wire Processing

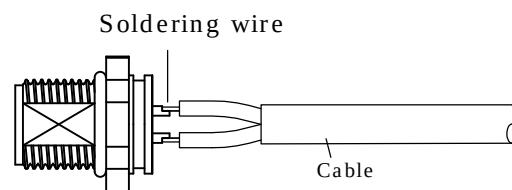

2. Installation Direction

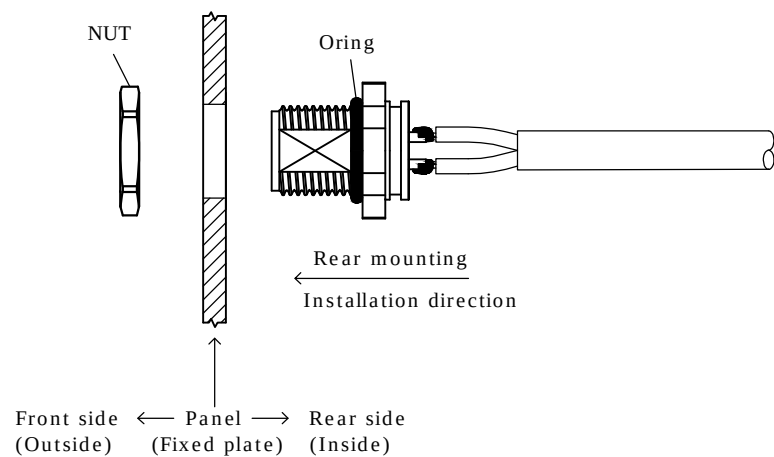

3. Connector Mated to Panel Mount

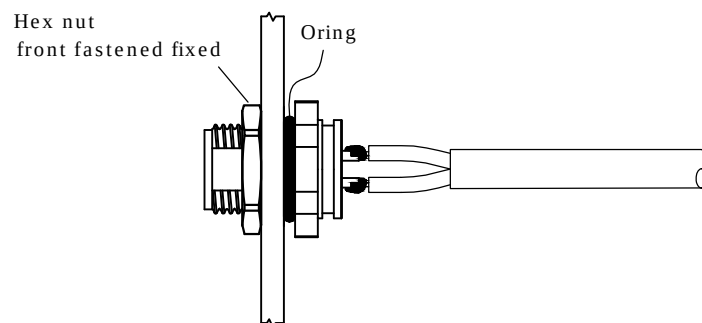

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND	
UNIT:	DECIMAL	LINEAR	ANGLES		
m m	X.	±0.50	±5°	WWW.ATTEND.COM.TW	
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
DRAWN	Tim	2025/02/25	DRAWN NAME:		
CHECKED	Fros	2025/02/25	M Series For Male Solder Type Front Fastener Design Guide		
APPROVED	Ken	2025/02/25	PRODUCT NO.		
	SCALE	SHEET 1/1	SIZE A4	FILE NAME	M Series MAF_DG