
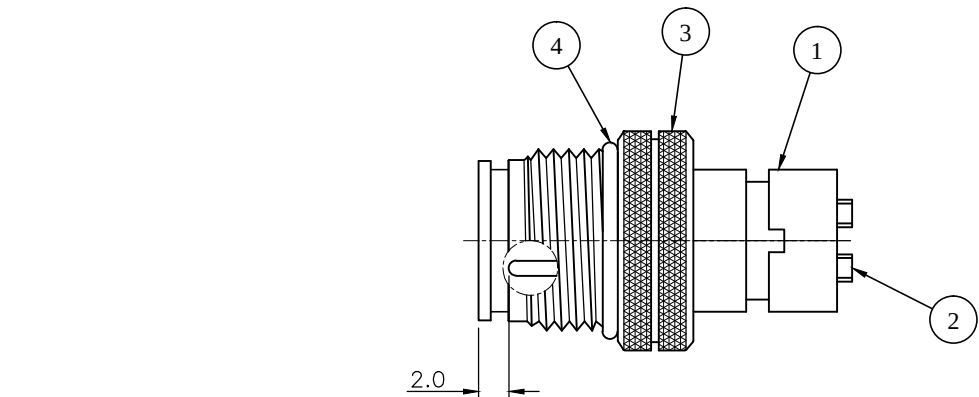

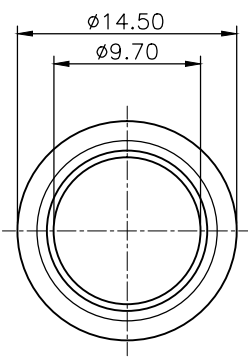


D-Coding, Male Pin

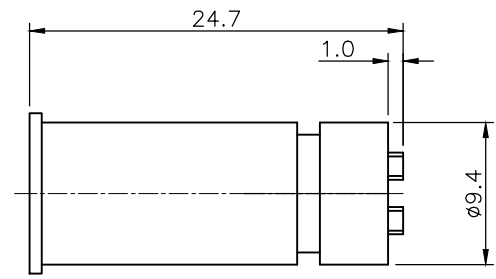

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2018/04/13
2	ECR220421001	TIM	2022/04/21

SPECIFICATION:

1. CURRENT RATING: 4A
2. VOLTAGE: 250V
3. WATER PROOF: IPX7
4. OPERATION TEMPERATURE: -40°C TO +85°C

5	EPOXY			
4	ORING	EPDM		
3	NUT	Brass, Nickel plating		
2	CONTACT	Brass, 10u" Gold plating over Nickel		
1	HOUSING	PBT, UL94V-0, Black		
NO. PART NAME		DESCRIPTION		
UNLESS OTHERWISE SPECIFIED TOLERANCE				
UNIT: m m	DECIMAL	LINEAR	ANGLES	
	X.	±0.50	±5°	
	X.X	±0.25	±3°	
	X.XX	±0.12	±1°	
			 ATTEND	
			www.attend.com.tw	
DRAWN	Fros	2018/04/13	DRAWN NAME: M12 D-Code Plug for Cable, 4 Pin Male For Overmold with Cable	
CHECKED	Tim	2018/04/13		
APPROVED	Ken	2018/04/13		
			PRODUCT NO.	216D-04MO0
	SCALE 1/1	SHEET 1/1	SIZE A4	FILE NAME 216D-04MO0_B_2

