


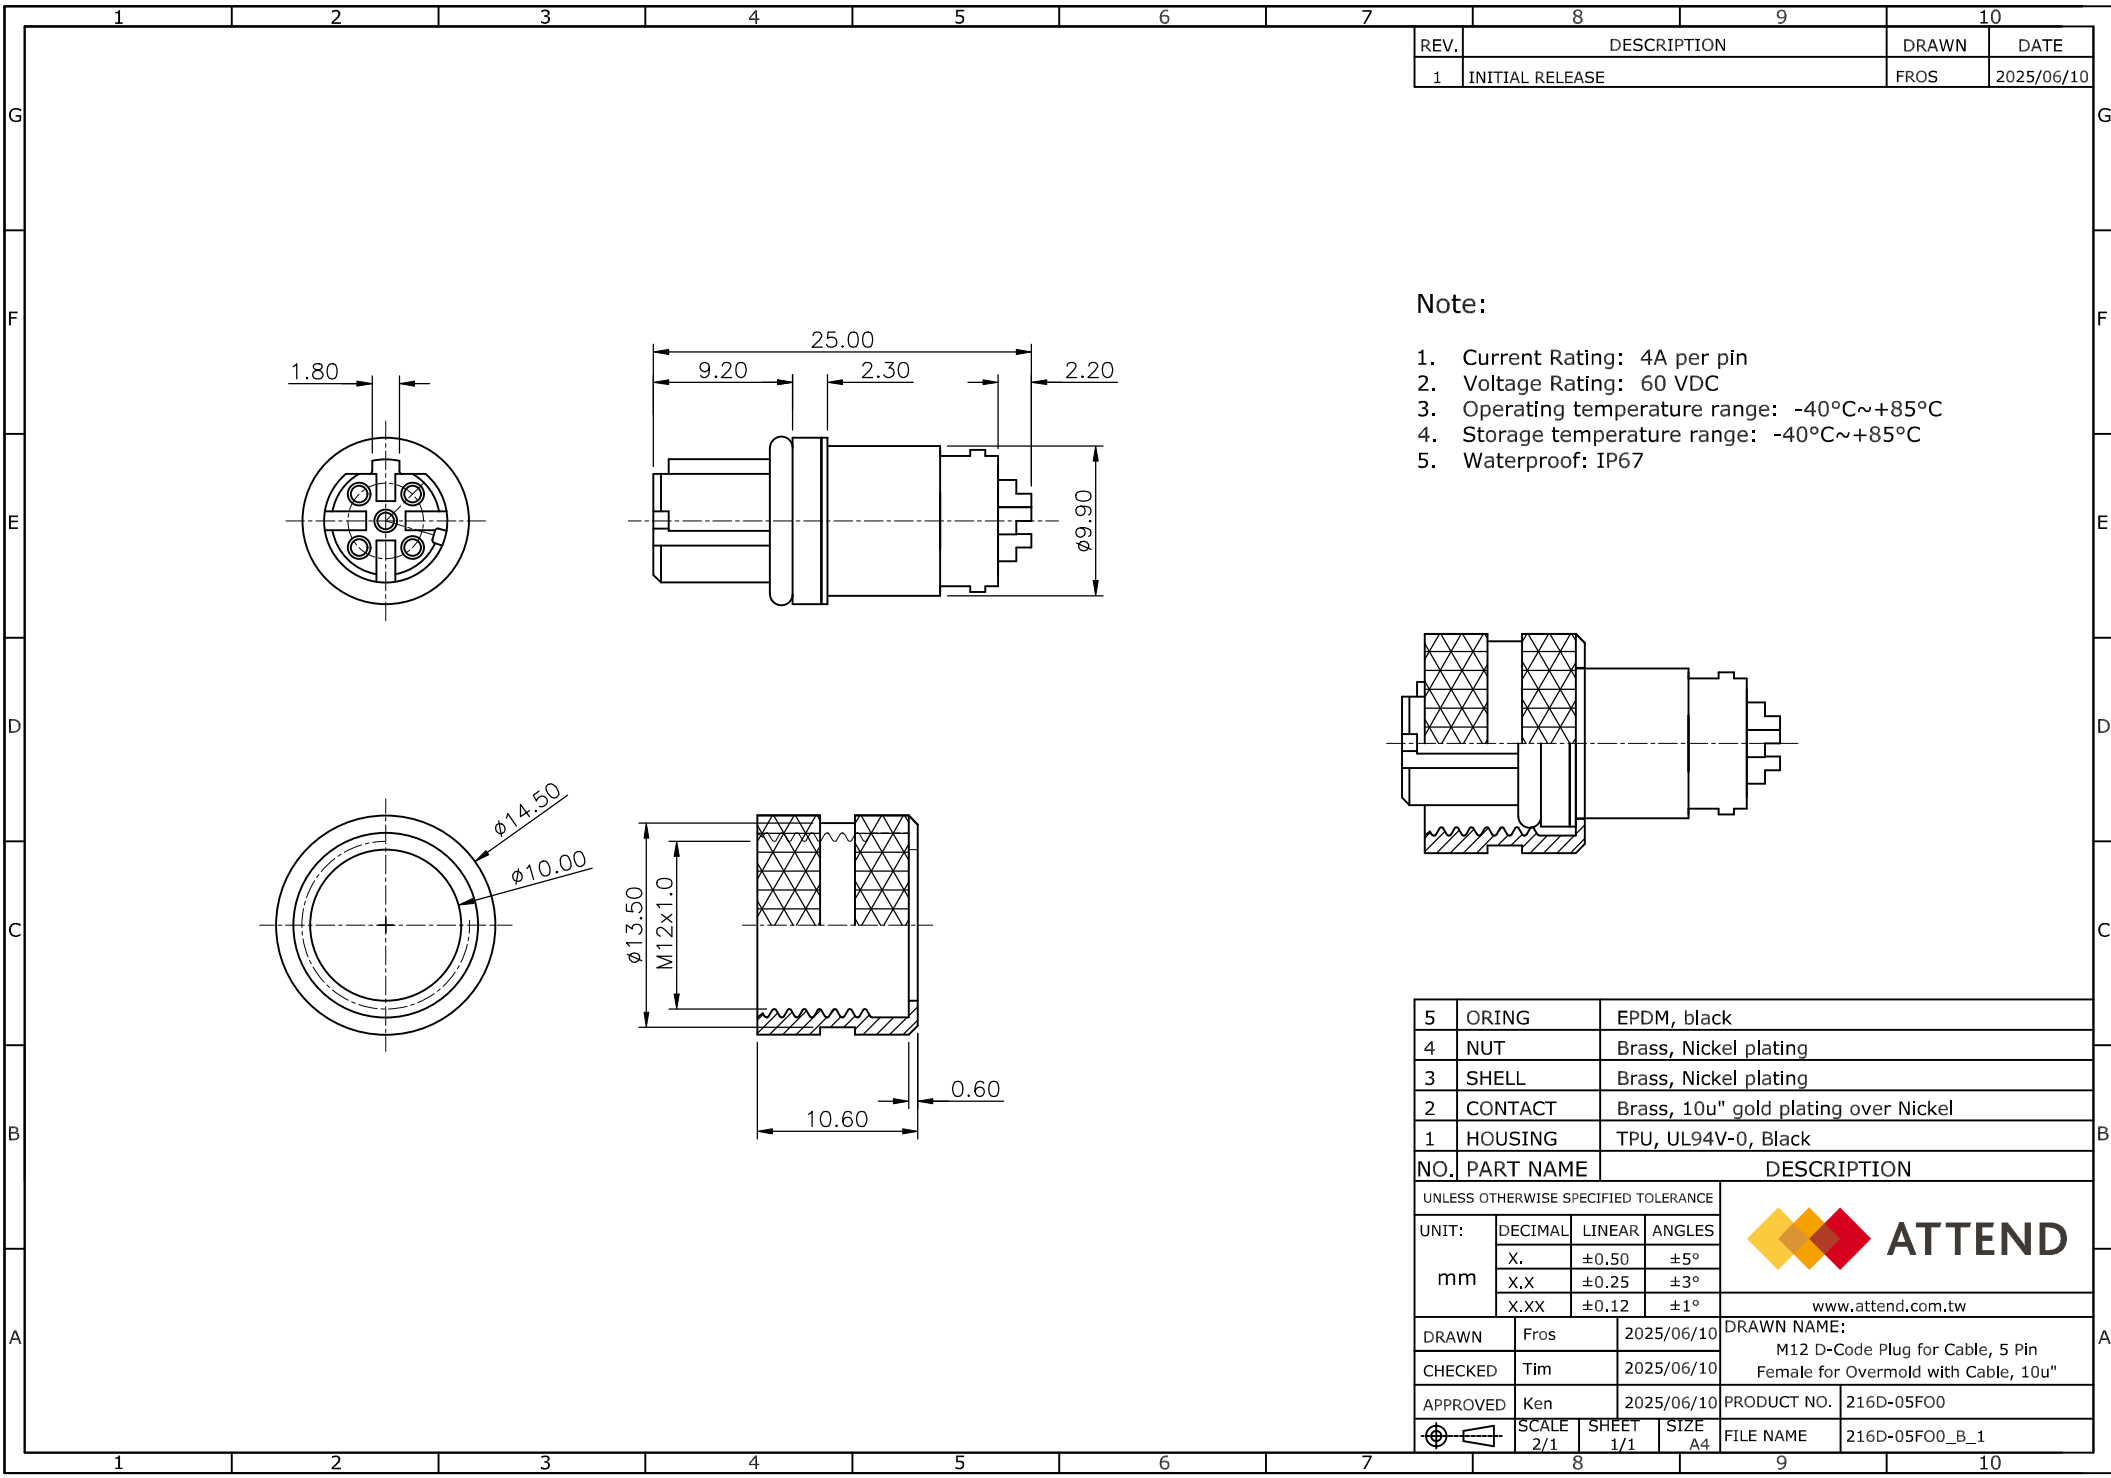

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2025/06/10

Note:

1. Current Rating: 4A per pin
2. Voltage Rating: 60 VDC
3. Operating temperature range: -40°C~+85°C
4. Storage temperature range: -40°C~+85°C
5. Waterproof: IP67

5	ORING	EPDM, black
4	NUT	Brass, Nickel plating
3	SHELL	Brass, Nickel plating
2	CONTACT	Brass, 10u" gold plating over Nickel
1	HOUSING	TPU, UL94V-0, Black

NO. PART NAME				DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND www.attend.com.tw	
UNIT: mm	DECIMAL	LINEAR	ANGLES		
	X.	±0.50	±5°		
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
DRAWN	Fros	2025/06/10	DRAWN NAME: M12 D-Code Plug for Cable, 5 Pin Female for Overmold with Cable, 10u"		
CHECKED	Tim	2025/06/10			
APPROVED	Ken	2025/06/10	PRODUCT NO.	216D-05FO0	
	SCALE 2/1	SHEET 1/1	SIZE A4	FILE NAME	216D-05FO0_B_1



www.attend.com.tw