


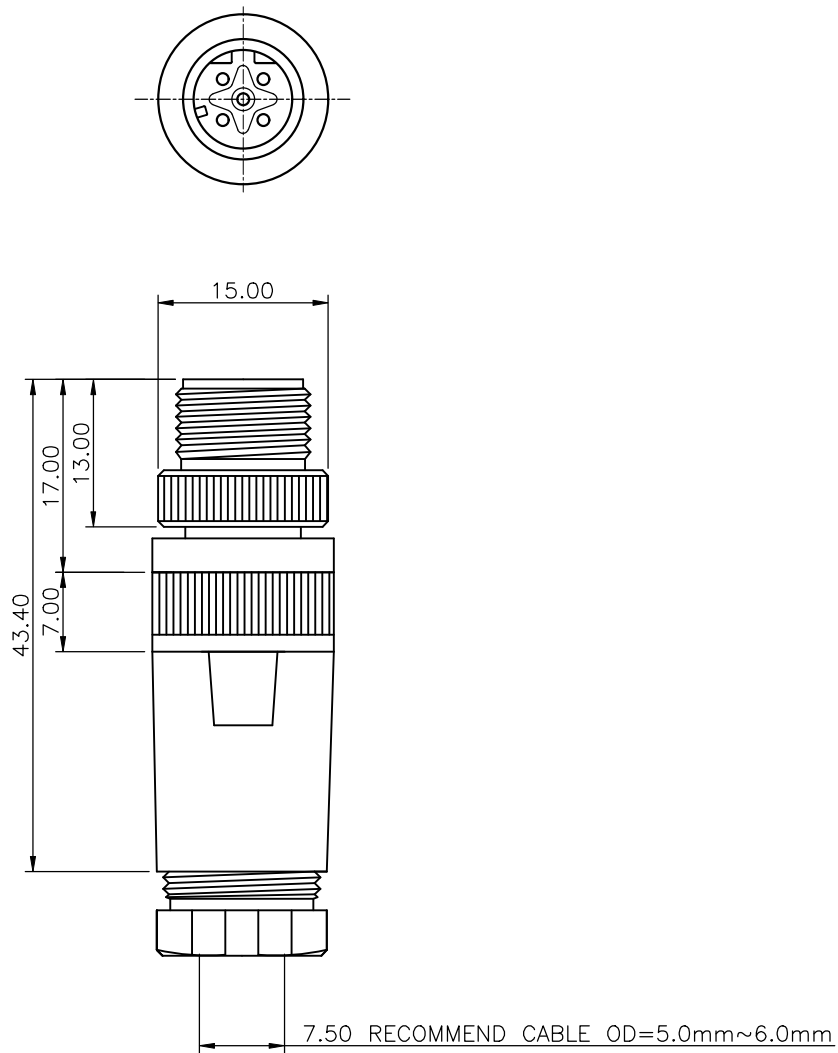

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2025/06/10

Note:

1. Current Rating: 4A per pin
2. Voltage Rating: 60 VDC
3. Operating temperature range: -20°C~+85°C
4. Storage temperature range: -20°C~+85°C
5. Waterproof: IP67

9	ORING	SILICONE, black
8	GLAND NUT	Aluminum alloy, SATIN Nickel plating
7	GLAND CAGE	POM, white
6	GLAND	SILICONE, black
5	BODY	Aluminum alloy, SATIN Nickel plating
4	SHELL	Aluminum alloy, SATIN Nickel plating
3	NUT	Aluminum alloy, SATIN Nickel plating
2	CONTACT	Brass, Gold plating over Nickel
1	HOUSING	PBT, UL94V-0, Black

NO.		PART NAME		DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND www.attend.com.tw	
UNIT:	DECIMAL	LINEAR	ANGLES		
	X.	±0.50	±5°		
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
mm					
DRAWN		Fros		DRAWN NAME:	
CHECKED		Tim		M12 D- Code Plug for Cable, 5 Pin Male For Field Installable	
APPROVED		Ken		PRODUCT NO. 216D-05MF0	
		SCALE 1.5/1	SHEET 1/1	SIZE A4	FILE NAME 216D-05MF0_B_1



www.attend.com.tw

DRAWN NAME:
M12 D- Code Plug for Cable,
5 Pin Male For Field Installable

PRODUCT NO. 216D-05MF0