
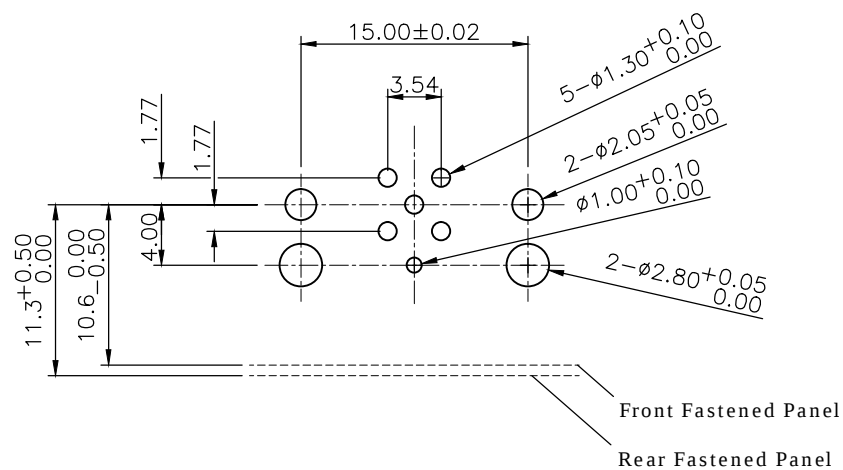
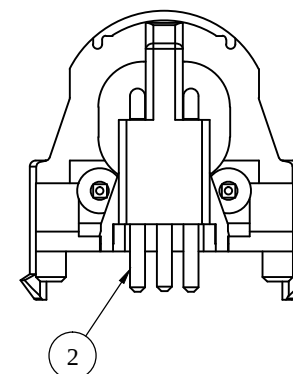


REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2025/05/09

NOTES:

1. Rated current: 4A
2. Rated voltage: 60V
3. Operation temperature: -40°C to +85°C

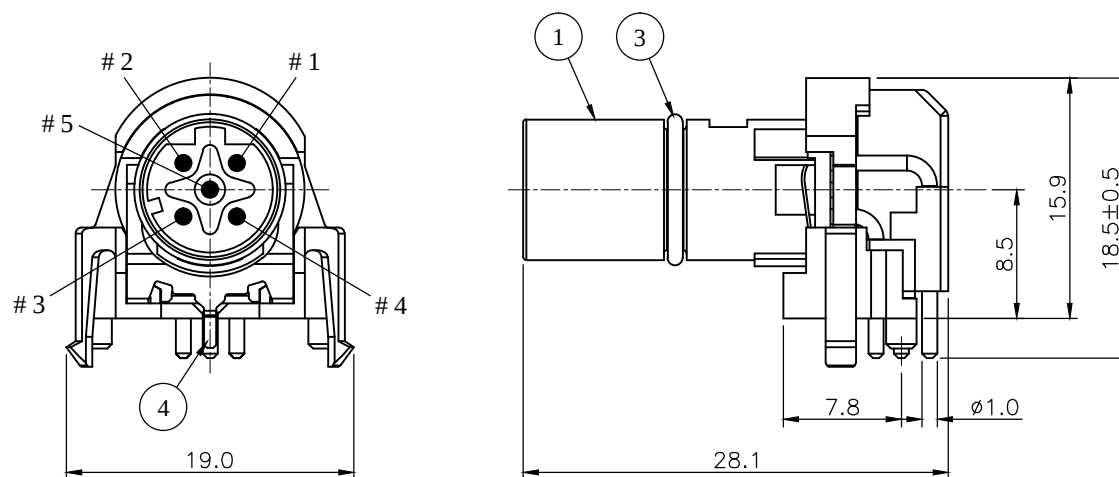

Recommended Layout (Top View)
General Tolerance: $\pm 0.05\text{mm}$

4	GROUND			Phosphor Bronze, Nickel plating		
3	ORING			VITON		
2	CONTACT			Brass, Gold plating over Nickel		
1	HOUSING			PA9T, UL94V-0, Black		
NO.		PART NAME		DESCRIPTION		
UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND		
UNIT:		DECIMAL	LINEAR			ANGLES
m m		X.	±0.50			±5°
		X.X	±0.25			±3°
		X.XX	±0.12			±1°
				WWW.ATTEND.COM.TW		
DRAWN		Tim		2025/05/09		
CHECKED		Fros		2025/05/09		
APPROVED		Ken		2025/05/09		
		SCALE		SHEET		
		2.0		1/1		
		SIZE		FILE NAME		
		A4		216D-05MRA_B_1		
DRAWN NAME:		M12 Two Piece Insert D-Code, 5Pin Male R/A DIP Type				
PRODUCT NO.		216D-05MRA				



WWW.ATTEND.COM.TW