
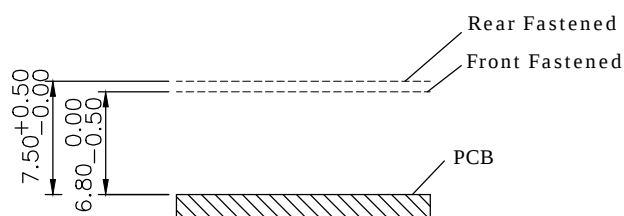



REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2025/05/09

NOTES:


1. Rated current: 4A
2. Rated voltage: 60V
3. Operation temperature: -40°C to +85°C

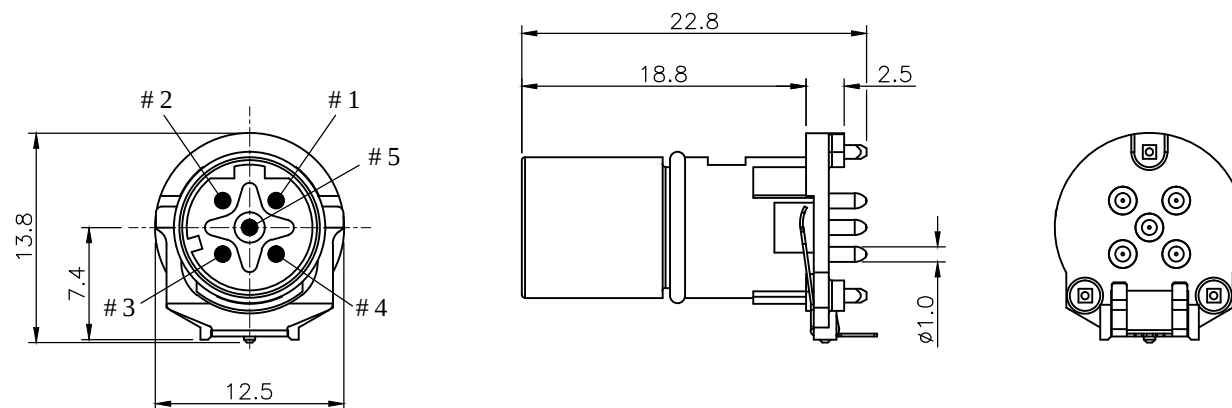

Recommended Panel Distance

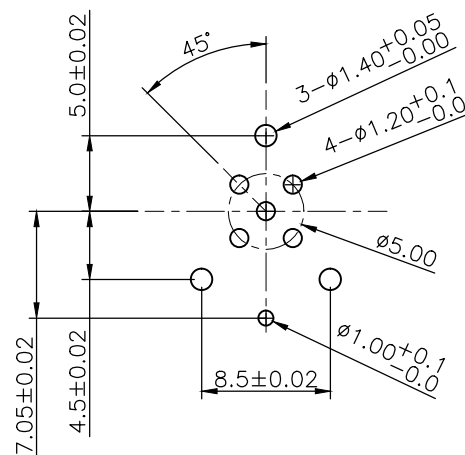

Recommended Layout (Top View)
PCB Thickness: 1.6mm
General Tolerance: ± 0.05 mm

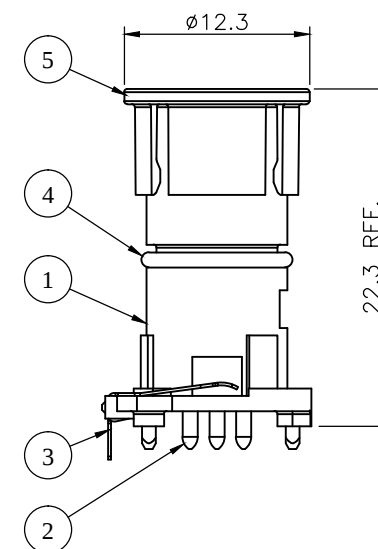

5	CAP	PA66		
4	ORING	VITON		
3	GROUND	Phosphor Bronze, Nickel plating		
2	CONTACT	Brass, Gold plating over Nickel		
1	HOUSING	PA9T, UL94V-0, Black		
NO. PART NAME		DESCRIPTION		
UNLESS OTHERWISE SPECIFIED TOLERANCE				
UNIT:	DECIMAL	LINEAR	ANGLES	 ATTEND
	X.	±0.50	±5°	
	X.X	±0.25	±3°	
	X.XX	±0.12	±1°	
				WWW.ATTEND.COM.TW
DRAWN	Tim	2025/05/09	DRAWN NAME:	
CHECKED	Fros	2025/05/09	M12 Two Piece Insert	
			D-Code, 5Pin Male DIP Type	
APPROVED	Ken	2025/05/09	PRODUCT NO.	216D-05MSA
	SCALE 2.5	SHEET 1/1	SIZE A4	FILE NAME 216D-05MSA_B_1



WWW.ATTEND.COM.TW

DRAWN NAME:
M12 Two Piece Insert
D-Code, 5Pin Male DIP Type

PRODUCT NO. 216D-05MSA