


| REV. | DESCRIPTION     | DRAWN | DATE       |
|------|-----------------|-------|------------|
| 1    | INITIAL RELEASE | FROS  | 2023/05/03 |
| 2    | ECR250418002    | FROS  | 2025/04/18 |

# SPECIFICATION:

1. Current Rating: 0.5A
2. Voltage Rating: 50VAC/ 60VDC
3. Water proof: IPX7
4. Operation Temperature: -40°C TO 85°C

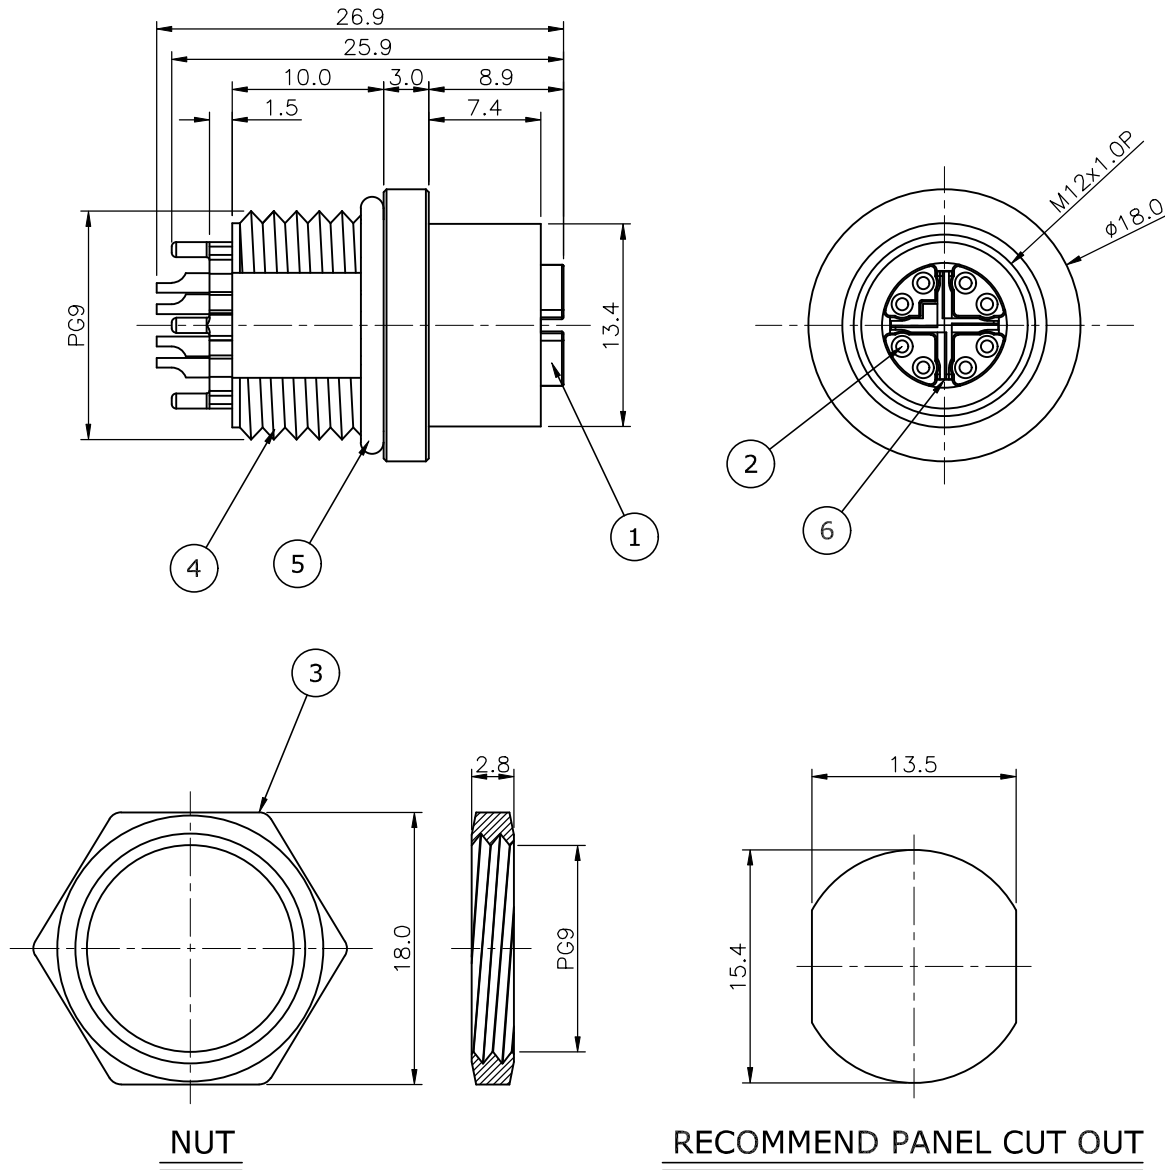

|     |           |                                      |
|-----|-----------|--------------------------------------|
| 6   | X-SHELL   | ZINC ALLOY, NICKEL PLATED            |
| 5   | O-RING    | EPDM                                 |
| 4   | SHELL     | BRASS, NICKEL PLATED                 |
| 3   | NUT       | BRASS, NICKEL PLATED                 |
| 2   | CONTACT   | BRASS, 10u" GOLD UNDER NICKEL PLATED |
| 1   | HOUSING   | PA66 UL94V-0, BLACK                  |
| NO. | PART NAME | DESCRIPTION                          |

|                                                                                       |              |              |                                                                                                 |                                                                                                                              |  |
|---------------------------------------------------------------------------------------|--------------|--------------|-------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|--|
| UNLESS OTHERWISE SPECIFIED TOLERANCE                                                  |              |              |                                                                                                 |  <b>ATTEND</b><br><br>www.attend.com.tw |  |
| UNIT:<br><br>mm                                                                       | DECIMAL      | LINEAR       | ANGLES                                                                                          |                                                                                                                              |  |
|                                                                                       | X.           | ±0.50        | ±5°                                                                                             |                                                                                                                              |  |
|                                                                                       | X.X          | ±0.25        | ±3°                                                                                             |                                                                                                                              |  |
|                                                                                       | X.XX         | ±0.12        | ±1°                                                                                             |                                                                                                                              |  |
| DRAWN                                                                                 | Fros         | 2023/05/03   | DRAWN NAME:<br>M12 X-code Receptade, 8 Pin Female,<br>Solder wire Rear fastended, w/shield 10u" |                                                                                                                              |  |
| CHECKED                                                                               | Zola         | 2023/05/03   | PRODUCT NO. 216X-08FAR                                                                          |                                                                                                                              |  |
| APPROVED                                                                              | Ken          | 2023/05/03   | FILE NAME 216X-08FAR_B_2                                                                        |                                                                                                                              |  |
|  | SCALE<br>2/1 | SHEET<br>1/1 | SIZE<br>A4                                                                                      |                                                                                                                              |  |