
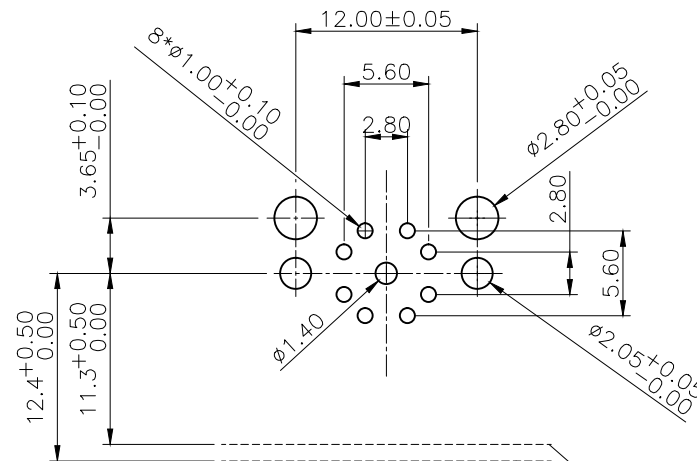
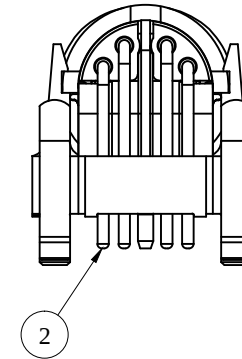
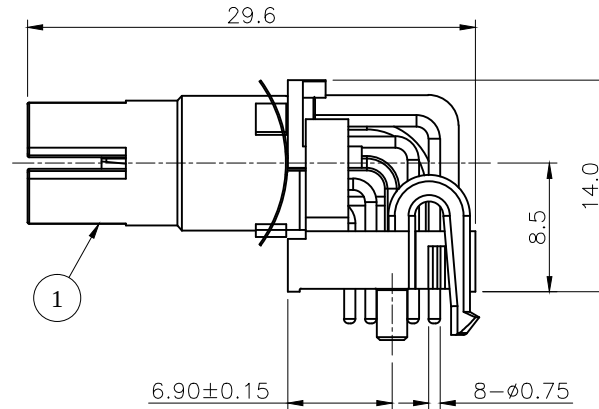


REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	Fros	2025/05/06

NOTES:

1. Rated current: 0.5A
2. Rated voltage: 50VAC/ 60VDC
3. Operation temperature: -40°C to +85°C

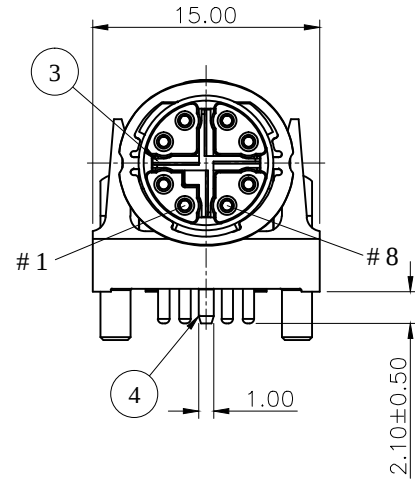

Recommended Layout (Top View)
General Tolerance: ±0.05mm

Front Fastened Panel
Rear Fastened Panel

4	GROUND	Phosphor Bronze, Nickel plating		
3	X-SHELL	Zn Alloy, Nickel plating		
2	CONTACT	Brass, Gold plating over Nickel		
1	HOUSING	PA9T, UL94V-0, Black		
NO.	PART NAME	DESCRIPTION		
UNLESS OTHERWISE SPECIFIED TOLERANCE		 ATTEND www.attend.com.tw		
UNIT: m m	DECIMAL		LINEAR	ANGLES
	X.		±0.50	±5°
	X.X		±0.25	±3°
	X.XX		±0.12	±1°
DRAWN	Fros	2025/05/06	DRAWN NAME: M12 Two Piece Insert, X-Code 8Pin Female R/A DIP Type	
CHECKED	Tim	2025/05/06		
APPROVED	Ken	2025/05/06	PRODUCT NO.	216X-08FRA
	SCALE 2/1	SHEET 1/1	SIZE A4	FILE NAME 216X-08FRA_B_1

