
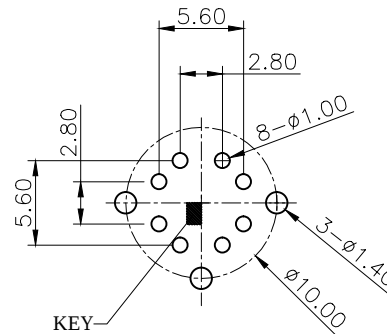
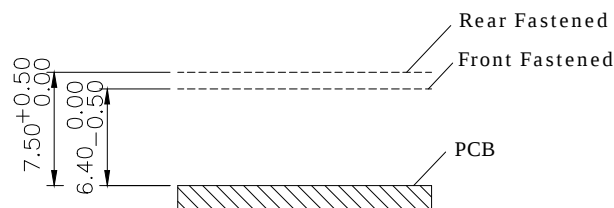
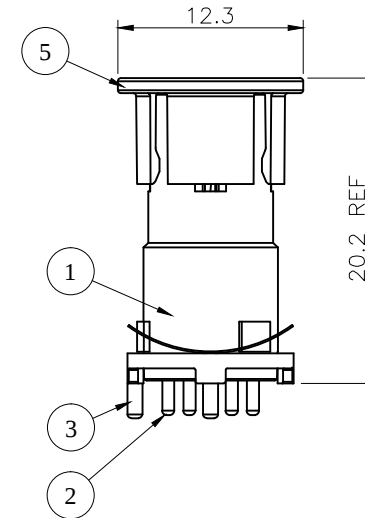

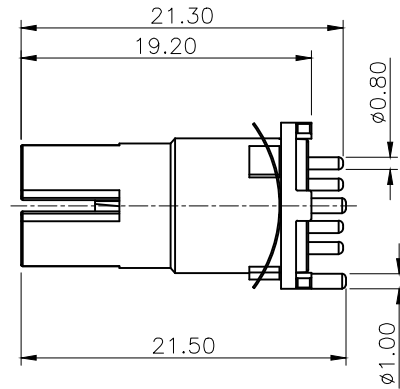


REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	Michael	2025/05/06

NOTES:

1. Rated current: 0.5A
2. Rated voltage: 50V AC/60V DC
3. Operation temperature: -40°C to +85°C



Recommended Panel Distance

Recommended Layout (Top View)
PCB Thickness: 1.6mm
General Tolerance: ±0.05mm

5	CAP	PA66			
4	X-SHELL	Zn Alloy, Nickel plating			
3	GROUND	Phosphor Bronze, Nickel plating			
2	CONTACT	Brass, Gold plating over Nickel			
1	HOUSING	PA9T, UL94V-0, Black			
NO.	PART NAME	DESCRIPTION			
UNLESS OTHERWISE SPECIFIED TOLERANCE		 ATTEND www.attend.com.tw			
UNIT: m m	DECIMAL		LINEAR	ANGLES	
	X.		±0.50	±5°	
	X.X		±0.25	±3°	
	X.XX		±0.12	±1°	
DRAWN	Michael	2025/05/06	DRAWN NAME: M12 Two Piece Insert, X-Code, 8Pin Female DIP Type		
CHECKED	Fros	2025/05/06			
APPROVED	Ken	2025/05/06			
	SCALE 2/1	SHEET 1/1	SIZE A4	PRODUCT NO.	216X-08FSA
				FILE NAME	216X-08FSA_B_1



www.attend.com.tw