
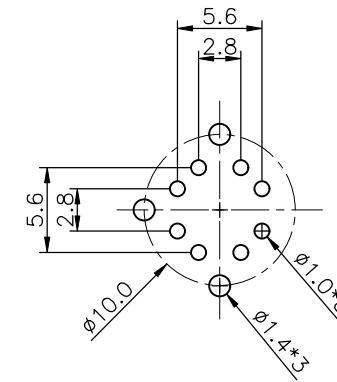
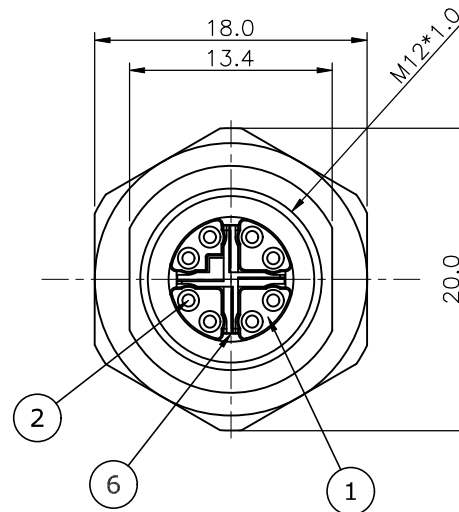




REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2015/08/17
2	CORRECTED	TIM	2020/05/07
3	ECR250418002	Fros	2025/04/18

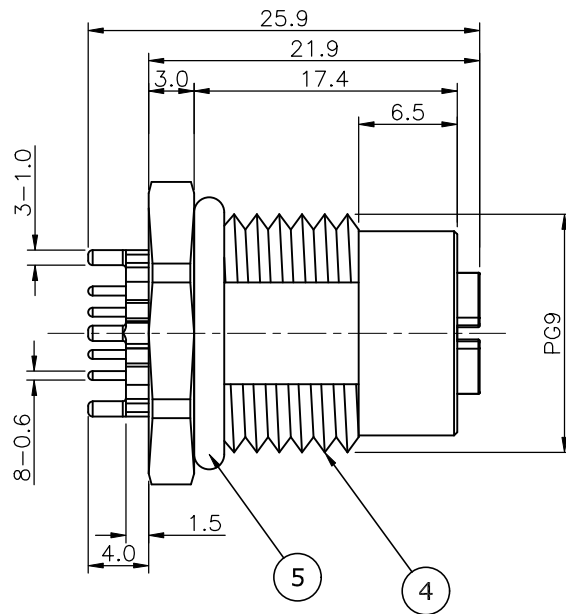

RECOMMEND LAYOUT

SPECIFICATION:

1. Current Rating: 0.5A
2. Voltage Rating: 50VAC/ 60VDC
3. Water proof: IPX7
4. Operation Temperature: -40°C TO 85°C

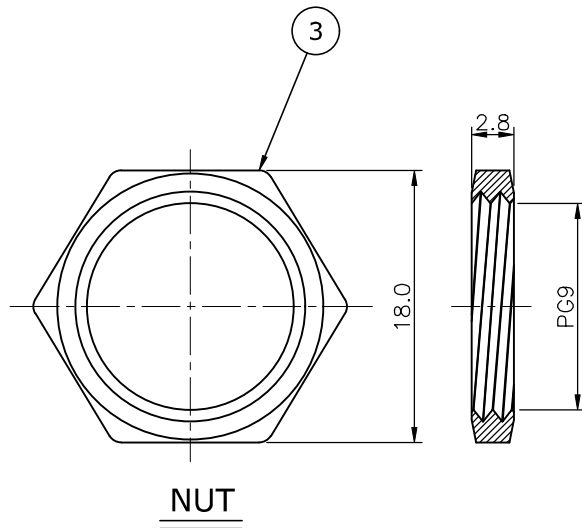

RECOMMEND PANEL CUT OUT

6	X-SHELL	ZINC ALLOY, NICKEL PLATED
5	O-RING	EPDM
4	SHELL	BRASS, NICKEL PLATED
3	NUT	BRASS, NICKEL PLATED
2	CONTACT	BRASS, 10u" GOLD UNDER NICKEL PLATED
1	HOUSING	PA UL94V-0, BLACK
NO.	PART NAME	DESCRIPTION

UNLESS OTHERWISE SPECIFIED TOLERANCE

UNIT:	DECIMAL	LINEAR	ANGLES
mm	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°



WWW.ATTEND.COM.TW

DRAWN	Fros	2015/08/17	DRAWN NAME:	M12 x-code Receptacle, 8 Pin Female, DIP Front fastened, w/shield 10u"
CHECKED	Zola	2015/08/17	PRODUCT NO.	216X-08FSF
APPROVED	Ken	2015/08/17	FILE NAME	216X-08FSF_B_3
SCALE	2/1	SHEET	1/1	SIZE
				A4