
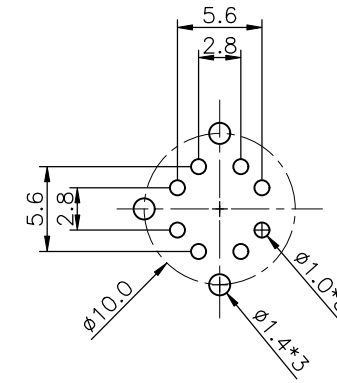
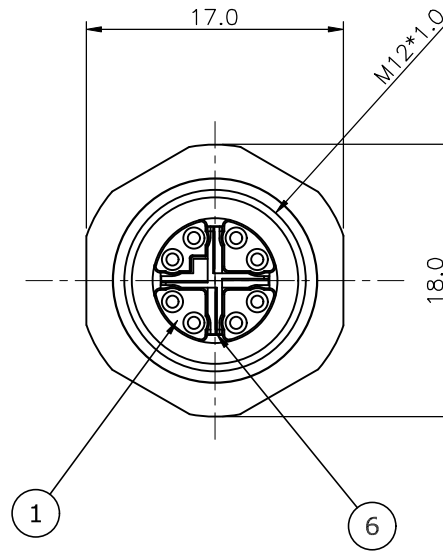




REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2015/12/17
2	CORRECTED	TIM	2020/05/07
3	ECR250418002	Fros	2025/04/18

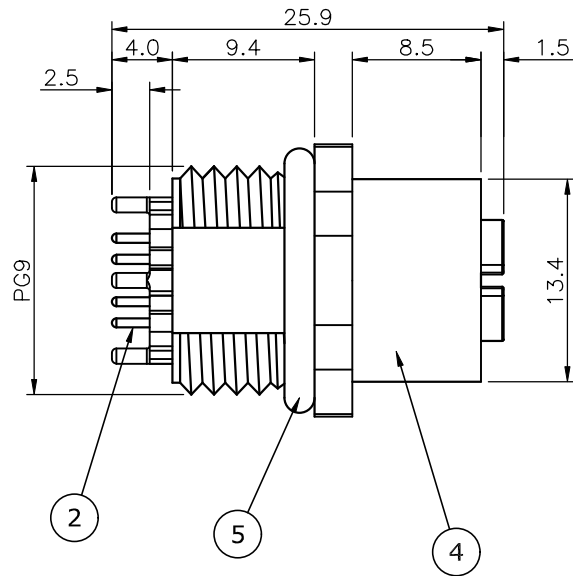

RECOMMEND LAYOUT

SPECIFICATION:

- △ 1. Current Rating: 0.5A
- △ 2. Voltage Rating: 50VAC/ 60VDC
3. Water proof: IPX7
4. Operation Temperature: -40°C TO 85°C

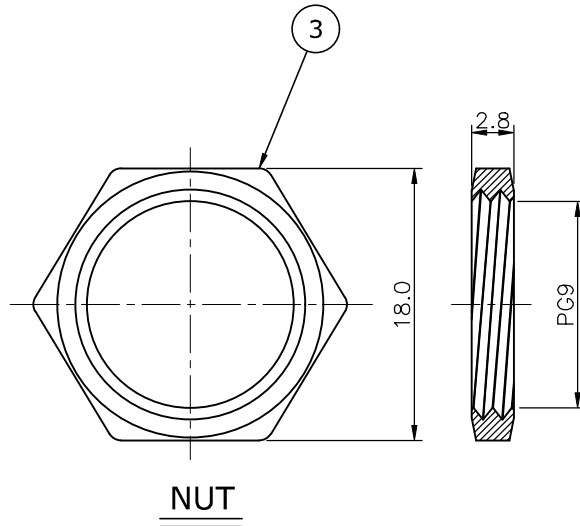

6	X-SHELL	ZINC ALLOY, NICKEL PLATED
5	O-RING	EPDM
4	SHELL	BRASS, NICKEL PLATED
3	NUT	BRASS, NICKEL PLATED
2	CONTACT	BRASS, 10u" GOLD UNDER NICKEL PLATED
1	HOUSING	PA UL94V-0, BLACK
NO.	PART NAME	DESCRIPTION

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND WWW.ATTEND.COM.TW	
UNIT: mm	DECIMAL	LINEAR	ANGLES		
	X.	±0.50	±5°		
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
DRAWN	Fros	2015/12/17	DRAWN NAME: M12 x-code Receptacle, 8 Pin Female, DIP Rear fastened, w/shield 10u"		
CHECKED	Amy	2015/12/17	PRODUCT NO. 216X-08FSR		
APPROVED	Ken	2015/12/17	FILE NAME 216X-08FSR_B_3		
	SCALE 2/1	SHEET 1/1	SIZE A4		