


REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2023/05/18
2	ECR250418002	FROS	2025/04/18

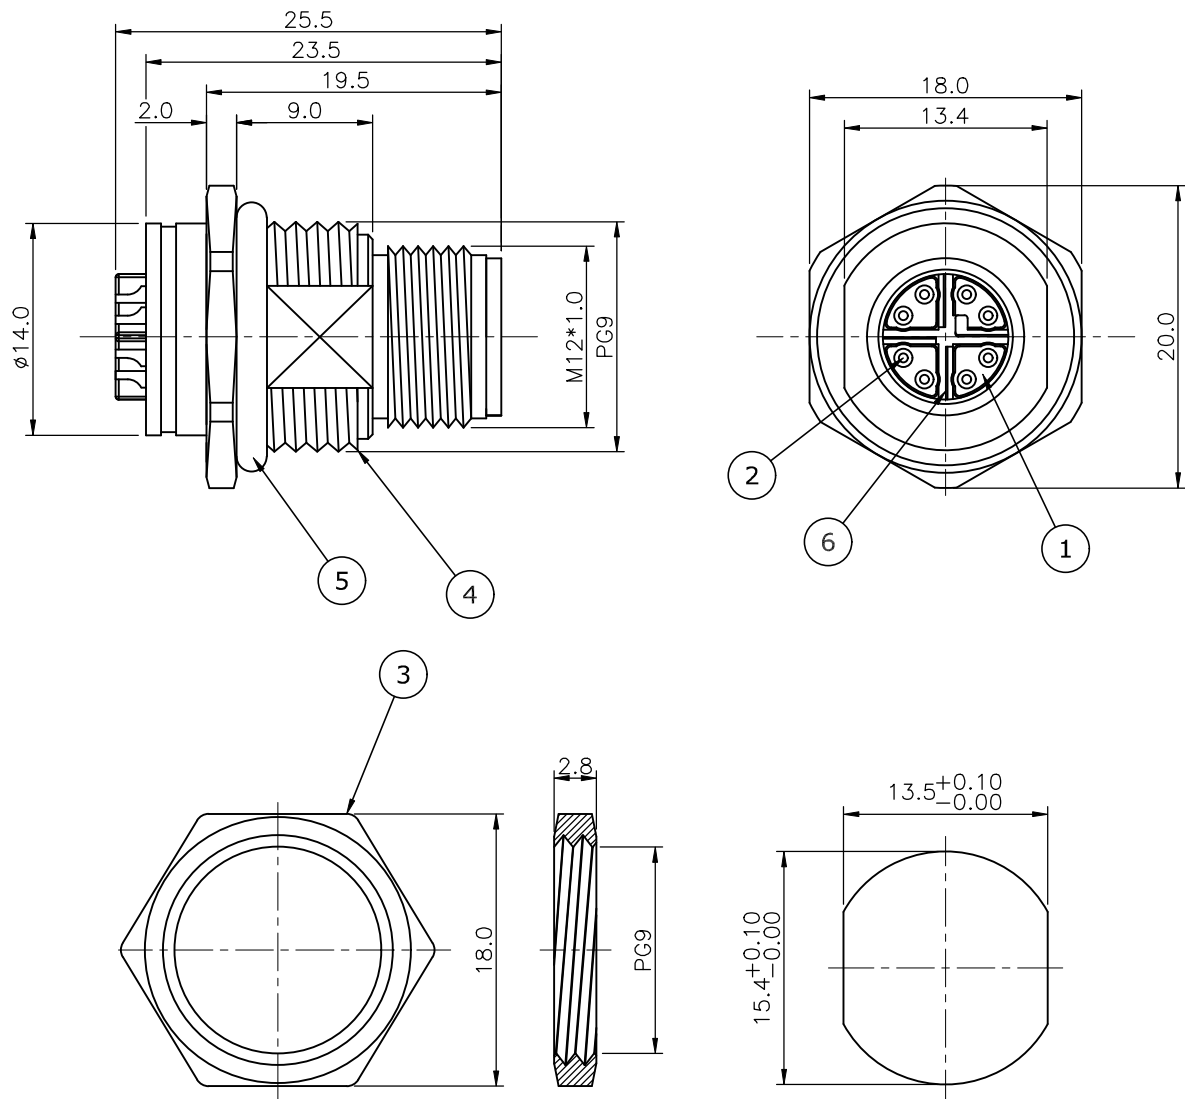

SPECIFICATION:

1. Current Rating: 0.5A
2. Voltage Rating: 50 V AC / 60 V DC
3. Water proof: IPX7
4. Operation Temperature: -40°C to 85°C

6	X-SHELL	Zinc alloy, nickel plating		
5	O-RING	EPDM		
4	SHELL	BRASS, nickel plating		
3	NUT	BRASS, nickel plating		
2	CONTACT	BRASS, 10u" gold under nickel plating		
1	HOUSING	PBT UL94V-0, Black		
NO. PART NAME		DESCRIPTION		
UNLESS OTHERWISE SPECIFIED TOLERANCE				
UNIT:		DECIMAL	LINEAR	ANGLES
mm		X.	±0.50	±5°
		X.X	±0.25	±3°
		X.XX	±0.12	±1°
WWW.ATTEND.COM.TW				
DRAWN		Fros	2023/05/18	
CHECKED		Tim	2023/05/18	
APPROVED		Ken	2023/05/18	
DRAWN NAME:		M12 x-code Receptacle, 8 Pin Male Soder wire, Front fastened, 10u"		
PRODUCT NO.		216X-08MAF		
FILE NAME		216X-08MAF_B_2		



NUT

RECOMMEND PANEL CUT OUT