


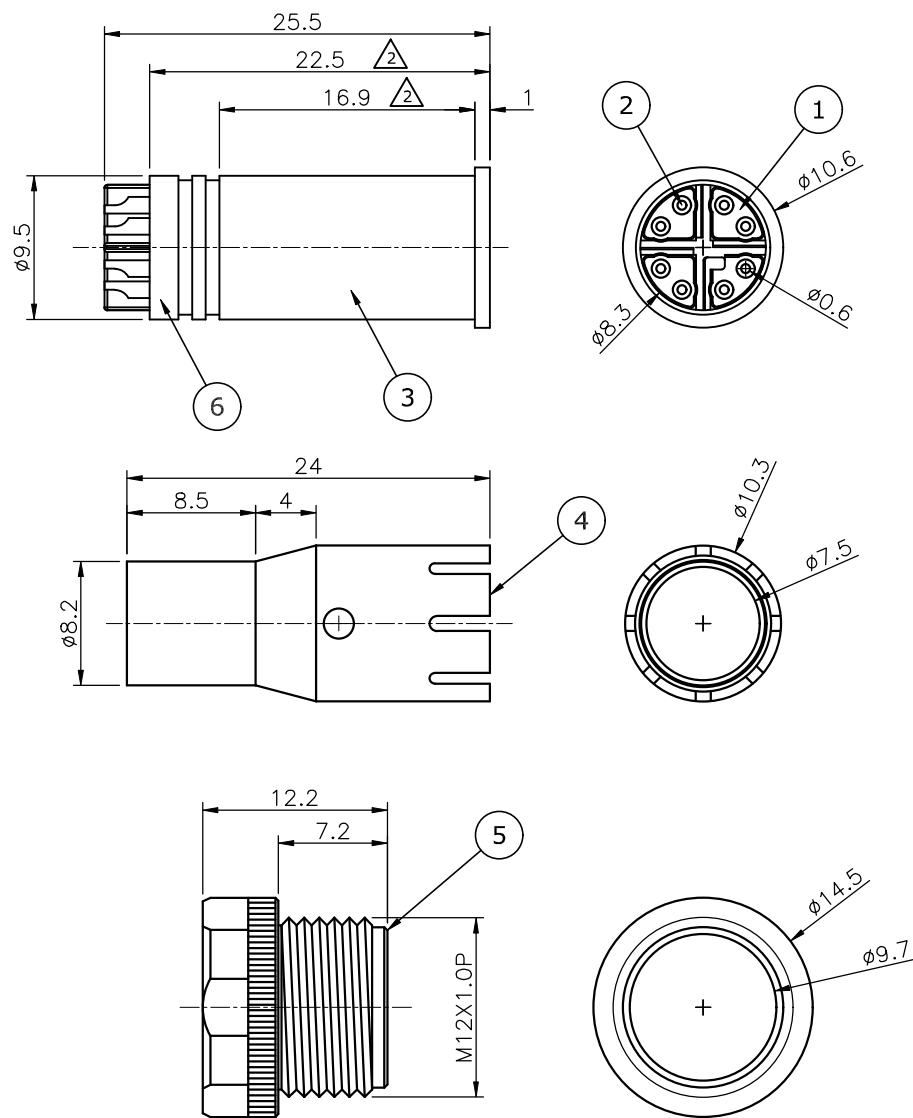

REV.	DESCRIPTION	DRAWN	DATE
3	ECR220421001	TIM	2022/04/21
3.1	CORRECTED	TIM	2022/12/01
4	ECR250418002	Fros	2025/04/18

SPECIFICATION:

Specification:

1. Current Rating: 0.5A
2. Voltage Rating: 50 V AC / 60 V DC
3. Water Proof: IPX7
4. Operation Temperature: -40°C to +85°C

6	EPOXY		
5	Nut	Brass, Nickel Plating	
4	Back Shell	Brass, Nickel Plating	
3	Shell	Zn alloy, Nickel Plating	
2	Contact	Brass, 10u" Gold under Nickel Plating	
1	Housing	PBT, UL94V-0, Black	
NO.	PART NAME	DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT:	DECIMAL	LINEAR	ANGLES
mm	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°
			 ATTEND
			WWW.ATTEND.COM.TW
DRAWN	Fros	2016/02/22	DRAWN NAME:
CHECKED	Amy	2016/02/22	M12 x-code Plug for Cable, 8 pin Male, 10u"
APPROVED	Ken	2016/02/22	PRODUCT NO. 216X-08MO0
	SCALE 2/1	SHEET 1/1	SIZE A4
			FILE NAME 216X-08MO0_B_4



WWW.ATTEND.COM.TW

DRAWN NAME:
M12 x-code Plug for Cable,
8 pin Male, 10u"

PRODUCT NO. 216X-08MO0