


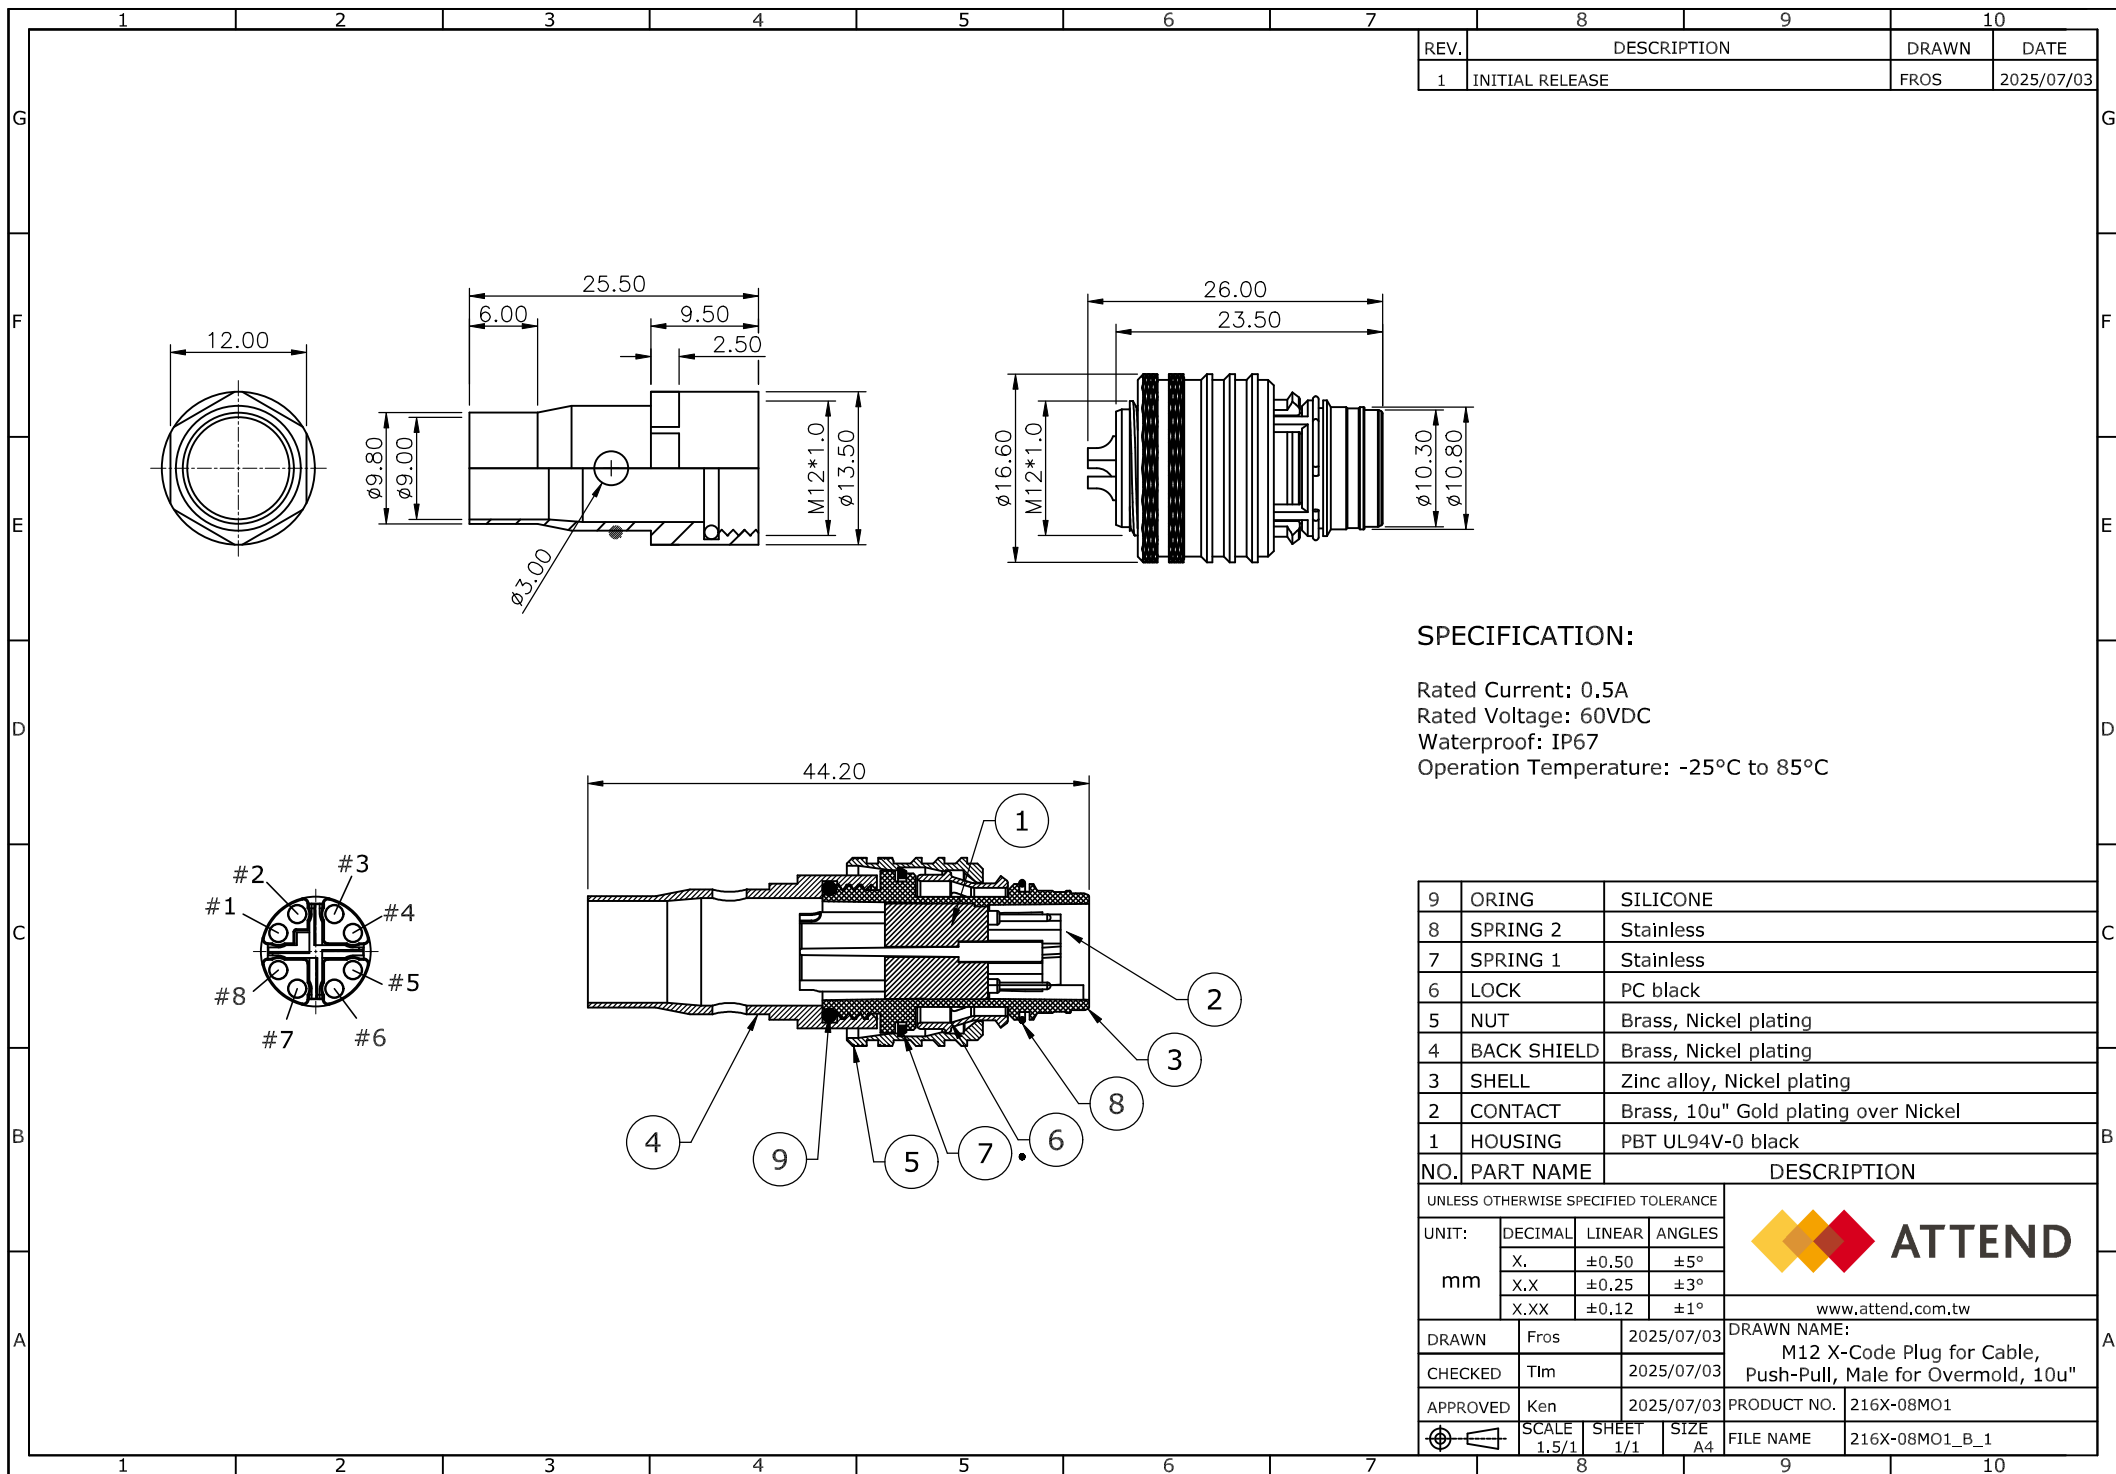

SPECIFICATION:

Rated Current: 0.5A
Rated Voltage: 60VDC
Waterproof: IP67
Operation Temperature: -25°C to 85°C

9	ORING	SILICONE	
8	SPRING 2	Stainless	
7	SPRING 1	Stainless	
6	LOCK	PC black	
5	NUT	Brass, Nickel plating	
4	BACK SHIELD	Brass, Nickel plating	
3	SHELL	Zinc alloy, Nickel plating	
2	CONTACT	Brass, 10u" Gold plating over Nickel	
1	HOUSING	PBT UL94V-0 black	
NO. PART NAME		DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT: mm	DECIMAL	LINEAR	ANGLES
	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°
			 ATTEND
			www.attend.com.tw
DRAWN	Fros	2025/07/03	DRAWN NAME: M12 X-Code Plug for Cable, Push-Pull, Male for Overmold, 10u"
CHECKED	Tlm	2025/07/03	
APPROVED	Ken	2025/07/03	
	SCALE	SHEET	SIZE
	1.5/1	1/1	A4
FILE NAME		216X-08MO1_B_1	