

SPECIFICATION AND PERFORMANCE

Series	217D-AB12	File	217D-AB12_SPEC_1	Date	2025/02/26
--------	-----------	------	------------------	------	------------

Scope:

This specification covers the requirements for product performance, test methods and quality assurance provisions of below:

P/N	Descriptions
217D-AB12	USB Type C Receptacle, 16 Pin Dual Row SMT Type, 3u", IPX8 Waterproof, w/ Oring

Performance and Descriptions:

The product is designed to meet the electrical, mechanical and environmental performance requirements specification. Unless otherwise specified, all tests are performed at ambient environmental conditions.

RoHS:

All material in according with the RoHS environment related substances list controlled.

MATERIALS

NO.	PART NAME	DESCRIPTION
1	HOUSING	PA9T, UL94-V0, black
2	CONTACT	Copper Nickel Silicon Alloy, 3u" Gold plating over Nickel
3	SHELL	Stainless steel, 50u" Nickel plating
4	ORING	Silicone

RATING

Rated Voltage	20V
Rated Current	5A
Operating Temperature	-40°C to +85°C
Storage Temperature	-40°C to +85°C
Durability	10,000 cycles


ELECTRICAL

Item	Requirement	Test Condition
Low Level Contact Resistance	Initial: 40mΩ Max. After: 50mΩ Max.	Solder connectors to PCB and insert dummy card, measure by applying closed circuit current of 10mA maximum at open circuit voltage of 20mV (max). (Per EIA-364-23)
Dielectric Withstanding Voltage	No Broken	100V AC (rms.) between two adjacent for 1 minute. (Trip current:1mA) (Per EIA-364-20)

Insulation Resistance	100MΩ Min.	Apply 250V DC between adjacent contacts, or contact and ground. (EIA-364-21)
-----------------------	------------	--

MECHANICAL		
Item	Requirement	Test Condition
Durability	Contact impedance: 150 mΩ MAX. Operating force: 30% initial value. Insulation resistance: 50MΩ min. Withstand voltage: AC 100 V(50Hz or 60 Hz) shall be no breakdown.	10,000 cycles of operation at a rate of 15-18 cycles per minute with unloading. Insertion force : 5N-20N Extraction force : 8N-20N After 10000 cycles Durability : 6N-20N
Terminal strength	There shall be no sign of damage Mechanically and electrically	The static force of 500gf being applied in one direction on the tip of the terminal for 1 minute

ENVIRONMENTAL		
Item	Requirement	Test Condition
Heat test	(1) Contact resistance: 150mΩ max (2) Insulation resistance: 50MΩ min.	80±2℃ for 96 hours, test after keeping in normal condition for 30 minutes.
Humidity test	Insulation resistance: 50MΩ min. There shall be no sign of damage mechanically and electrically.	40±2℃ 90-95%RH for 96 hours, test after, keeping in normal condition for 30 min.
Cold test	Insulation resistance: 50MΩ min. There shall be no sign of damage mechanically and electrically.	At -40±3℃ for 96 hours, test after Keeping in normal condition for 30 min.
Temperature cycling test	Contact resistance: 150mΩ max. Insulation resistance: 50M Ω min. There shall be no sign of damage mechanically and electrically.	In FIG. For 5 cycles, test after keeping in normal condition for 30 min.

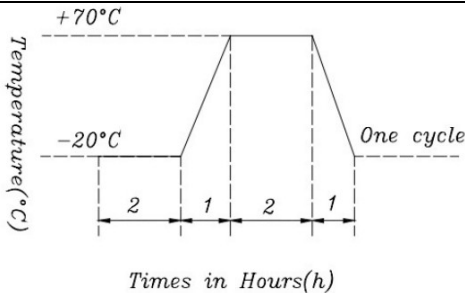		 <p>Temperature(°C)</p> <p>Times in Hours(h)</p>
Salt spray	Appearance: no damage. Contact Resistance: 50mΩ Max	<p>Mated connectors and expose to the follow Lowing salt mist conditions. Upon Completion of the exposure period, salt deposits shall be removed by a gentle Wash or dip in running water, after which the specified measurement shall Be performed.</p> <p>NaCl solution: Concentration: 5±1% Spray time: 48 hours ambient Temperature: 35±2°C EIA-364-26B</p>
The waterproof Level test of IPX8	No water enters Into enclosure through Type C interface	The product is 1.5 meters away from the water surface for 30 minutes without water seepage

SOLDER ABILITY		
Item	Requirement	Test Condition
Solder ability	95% of immersed area must show no voids, pin holes	<p>The termination should be 95% covered with new continuous solder coating</p> <p>Solder temperature: 245±5°C</p> <p>Test time: 3±0.5 seconds, (Per EIA-364-71)</p>
Resistance to soldering heat	No melting, cracks or functional damage allowed	<p>Preheating temperature: 150 ~ 200°C, 60~120 seconds</p> <p>Liquidus temperature (TL): 217°C, 60~150 seconds</p> <p>Peak temperature: 260°C</p> <p>Time within 5 °C of peak temperature (Tc): 255°C, 30seconds</p>



ATTEND
Connect to Your Success


立威科技股份有限公司 Attend Technology Inc.

新北市汐止區新台五路一段75號6樓之二

6F-2, No.75, Sec.1, Xintai 5th Rd., Xizhi-Dist., New Taipei City 221, Taiwan, R.O.C.

TEL 886 2 2698 7028 FAX 886 2 2698 7078 WEBSITE www.attend.com.tw

Reflow Profile

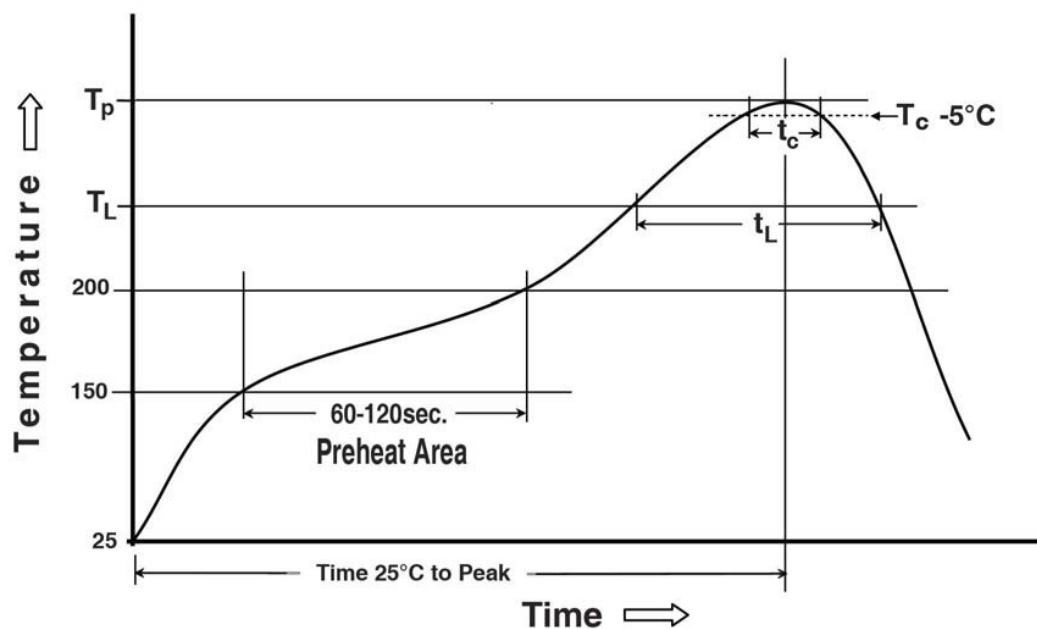

Preheating temperature: 150 ~ 200 $^{\circ}\text{C}$, 60~120 seconds

Liquidus temperature (T_L): 217 $^{\circ}\text{C}$, 60~150 seconds

Peak temperature: 260 $^{\circ}\text{C}$

Time within 5 $^{\circ}\text{C}$ of peak temperature (T_c): 255 $^{\circ}\text{C}$, 30seconds

The information contained herein is exclusive property of. Do not copy and print except that Attend accepts.

本文件係屬立威科技股份有限公司所有；非經同意，不得以任何覆寫、拷貝、翻印等方式私自據有。亦不得擅加毀損、塗改。