


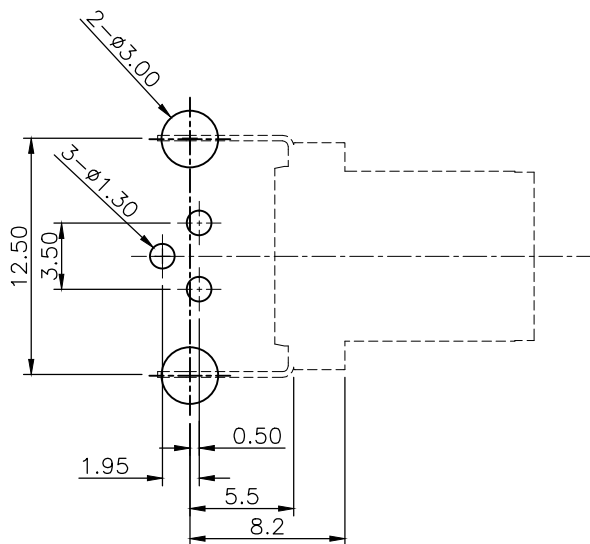
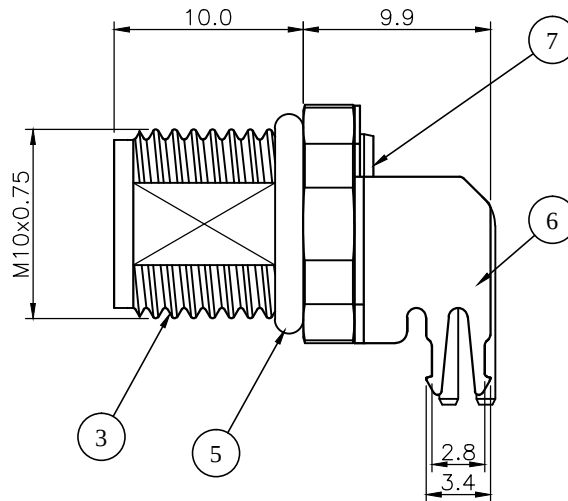
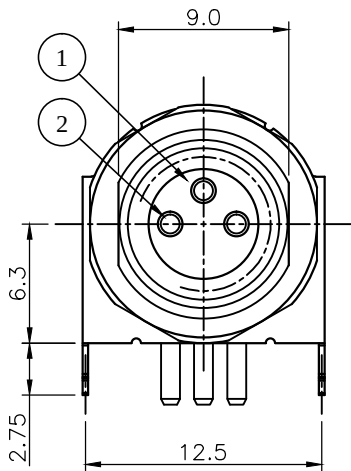


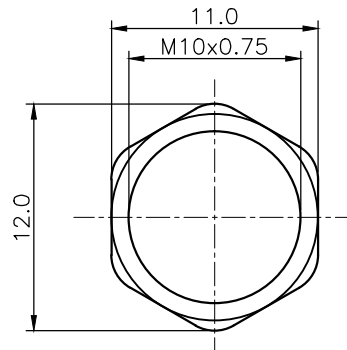

RECOMMENDED LAYOUT (TOP VIEW)
GENERAL TOLERANCE: $\pm 0.1\text{mm}$



HEX-NUT



PANEL CUT-OUT

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2024/08/28

SPECIFICATION:

- CURRENT RATING: 3A
- VOLTAGE: 50VAC/60VDC
- WATER PROOF: IPX7
- OPERATION TEMPERATURE: -40°C TO $+85^{\circ}\text{C}$

7	EPOXY BASE			
6	GROUND	PHOSPHOR BRONZE, TIN PLATED		
5	O-RING	NBR ,BLACK		
4	NUT	BRASS, NICKEL PLATED		
3	SHELL	BRASS, NICKEL PLATED		
2	CONTACT	BRASS, 10u" GOLD PLATED UNDER NICKEL		
1	HOUSING	PA66, UL94V-0, BLACK		
NO.	PART NAME	DESCRIPTION		
UNLESS OTHERWISE SPECIFIED TOLERANCE		 ATTEND		
UNIT:	DECIMAL		LINEAR	ANGLES
	X.		±0.50	±5°
	X.X		±0.25	±3°
	X.XX		±0.15	±1°
m m				
		www.attend.com.tw		
DRAWN	Tim	2024/08/28	DRAWN NAME: M8 A-Code Receptacle, 3Pin Female R/A DIP Type, Front Fastened, Shield	
CHECKED	Fros	2024/08/28		
APPROVED	Ken	2024/08/28		
		PRODUCT NO.	219A-03FRF	
	SCALE 2.5	SHEET 1/1	SIZE A4	FILE NAME 219A-03FRF_B_1