


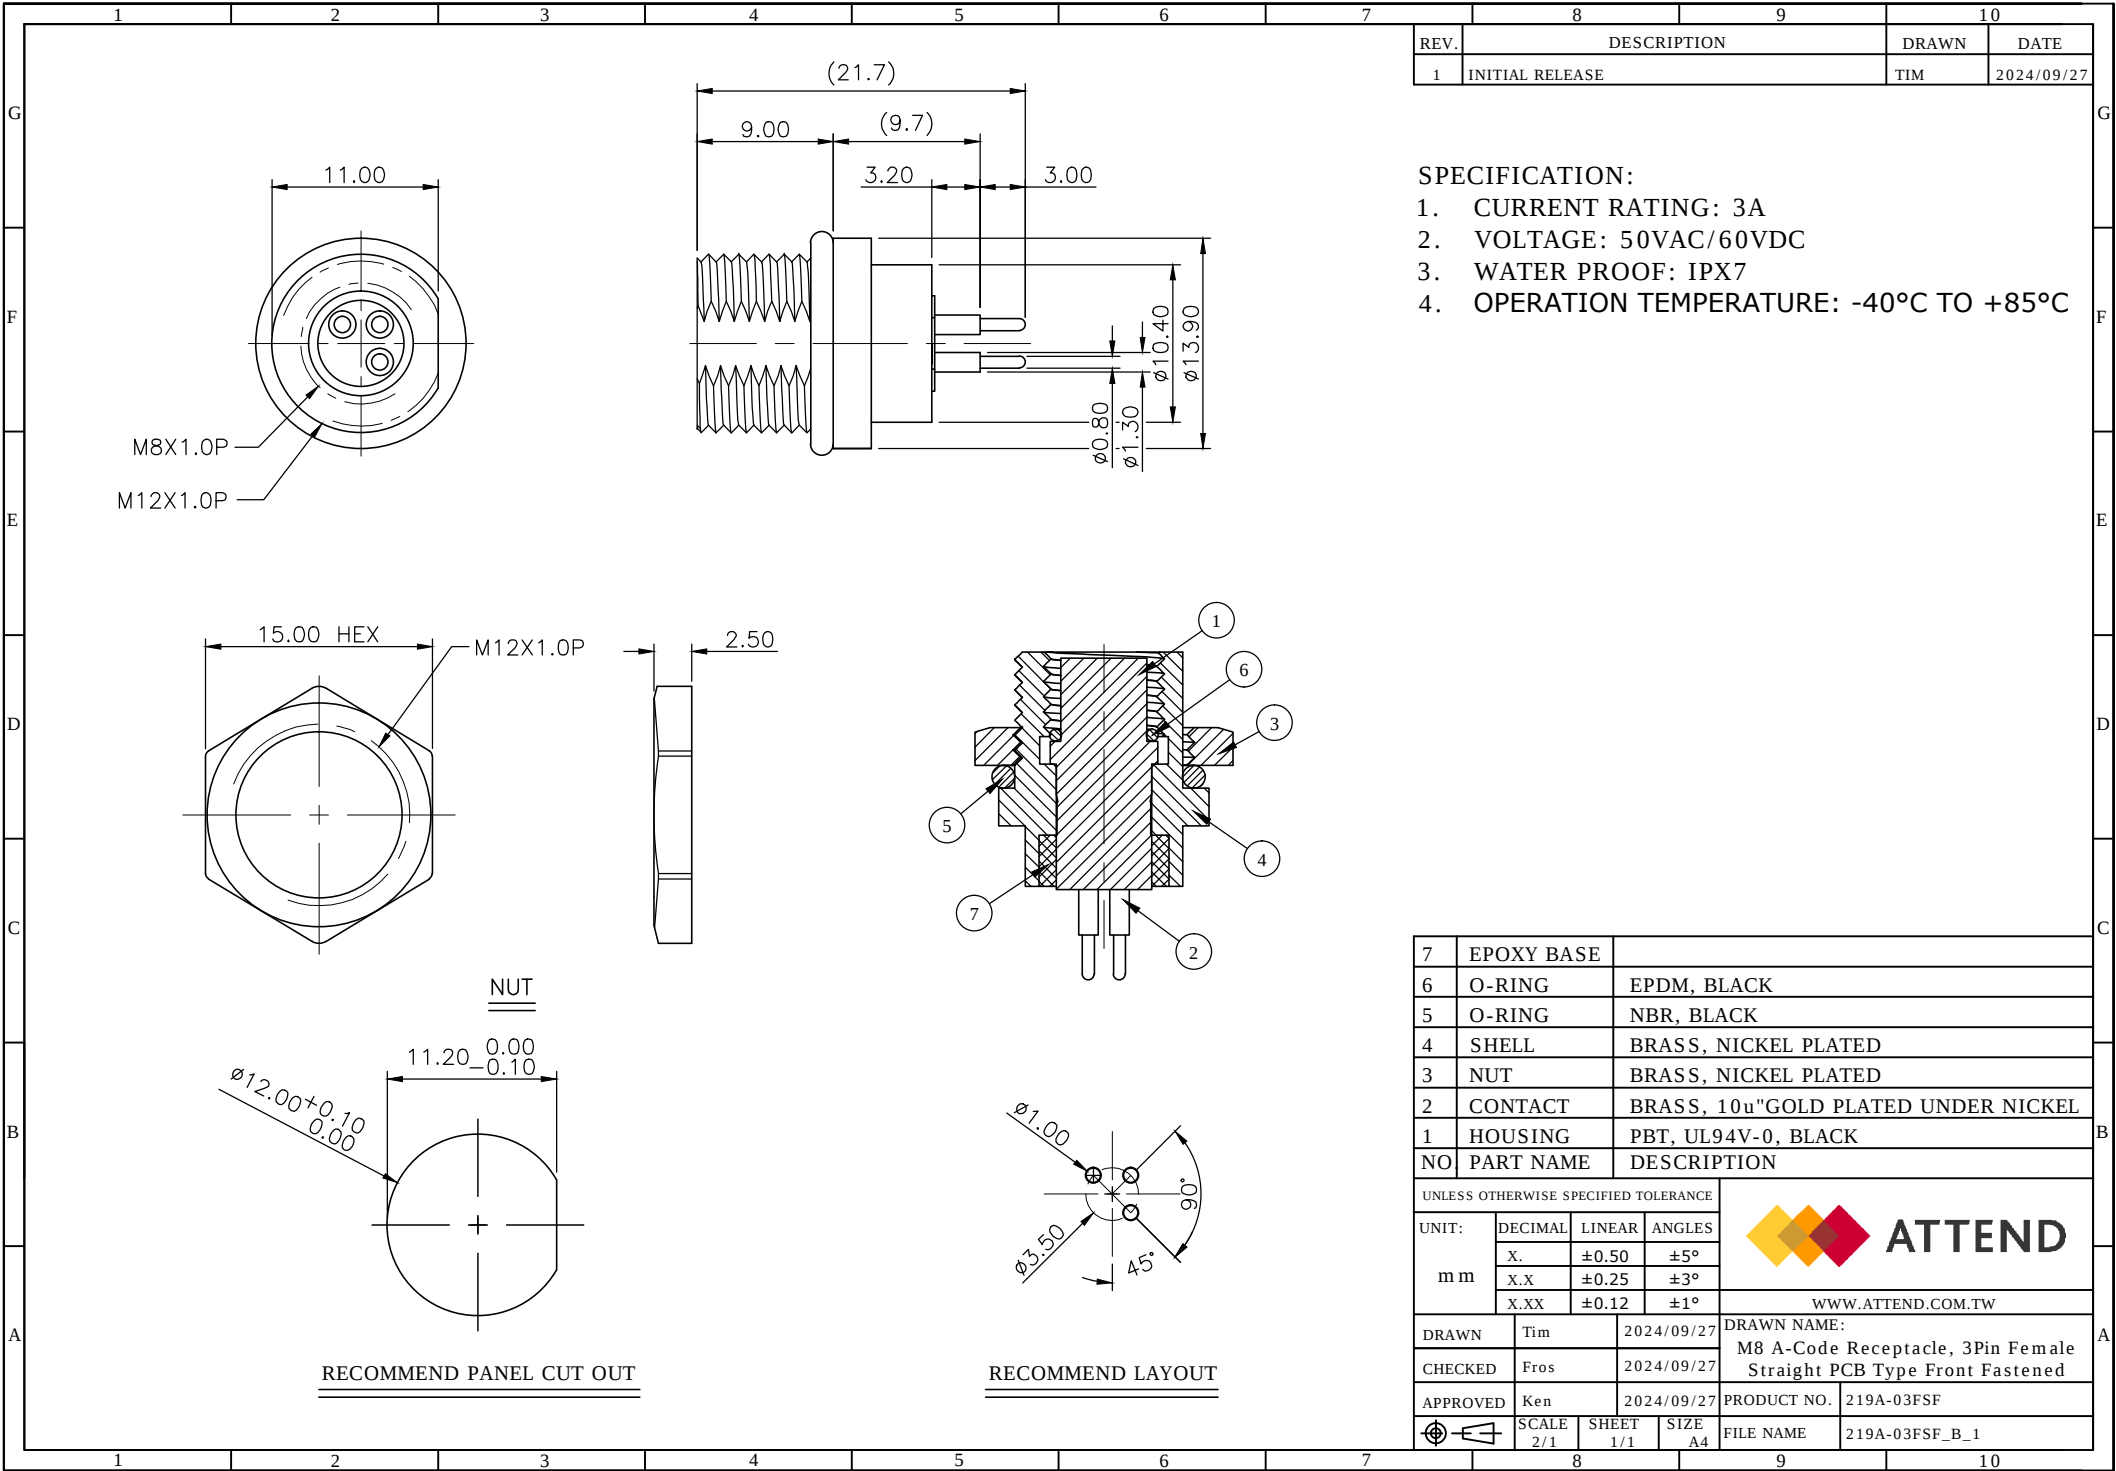


REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2024/09/27


- SPECIFICATION:
- CURRENT RATING: 3A
 - VOLTAGE: 50VAC/60VDC
 - WATER PROOF: IPX7
 - OPERATION TEMPERATURE: -40°C TO +85°C

7	EPOXY BASE				
6	O-RING	EPDM, BLACK			
5	O-RING	NBR, BLACK			
4	SHELL	BRASS, NICKEL PLATED			
3	NUT	BRASS, NICKEL PLATED			
2	CONTACT	BRASS, 10u"GOLD PLATED UNDER NICKEL			
1	HOUSING	PBT, UL94V-0, BLACK			
NO	PART NAME	DESCRIPTION			
UNLESS OTHERWISE SPECIFIED TOLERANCE					
UNIT:	DECIMAL	LINEAR	ANGLES		
	X.	±0.50	±5°		
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
m m					
			 ATTEND		
			WWW.ATTEND.COM.TW		
DRAWN	Tim	2024/09/27	DRAWN NAME: M8 A-Code Receptacle, 3Pin Female Straight PCB Type Front Fastened		
CHECKED	Fros	2024/09/27			
APPROVED	Ken	2024/09/27	PRODUCT NO.	219A-03FSF	
	SCALE 2/1	SHEET 1/1	SIZE A4	FILE NAME	219A-03FSF_B_1


1. Soldering Board



2. Installation Direction

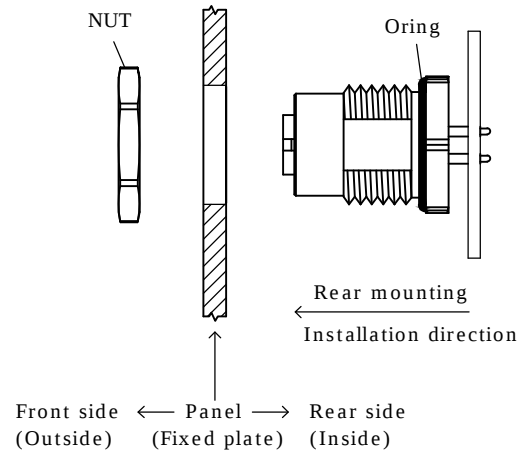

3. Connector Mated to Panel Mount

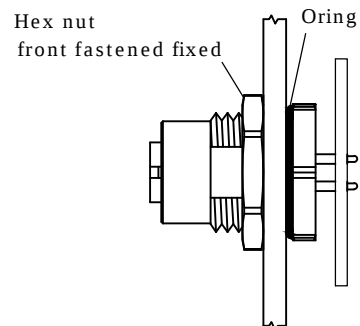

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND	
UNIT:	DECIMAL	LINEAR	ANGLES		
m m	X.	±0.50	±5°	WWW.ATTEND.COM.TW	
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
DRAWN	Tim	2025/02/25	DRAWN NAME:		
CHECKED	Fros	2025/02/25	M Series For Female DIP Type Front Fastened Design Guide		
APPROVED	Ken	2025/02/25	PRODUCT NO.		
	SCALE	SHEET 1/1	SIZE A4	FILE NAME	M Series FSF_DG