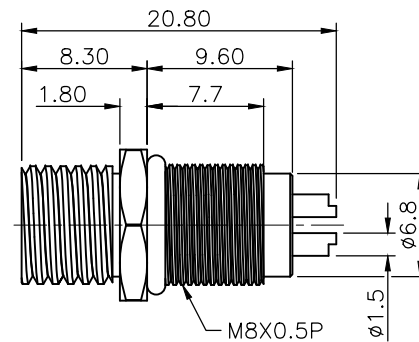




NUT

RECOMMEND PANEL CUT OUT

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2025/03/12

SPECIFICATION:

- CURRENT RATING: 3A
- VOLTAGE: 50VAC/60VDC
- WATER PROOF: IP67
- OPERATION TEMPERATURE: -40°C TO +85°C

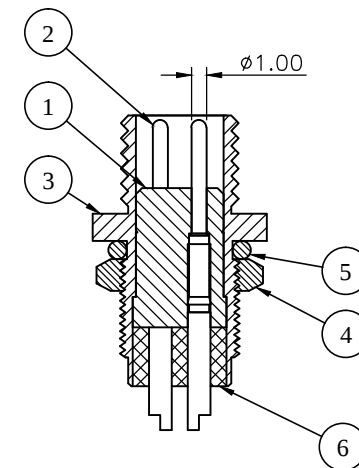

6	EPOXY BASE				
5	O-RING	NBR, BLACK			
4	NUT	BRASS, NICKEL PLATED			
3	SHELL	BRASS, NICKEL PLATED			
2	CONTACT	Brass, 10u" GOLD PLATED UNDER NICKEL			
1	HOUSING	PBT, UL94V-0, BLACK			
NO.	PART NAME	DESCRIPTION			
UNLESS OTHERWISE SPECIFIED TOLERANCE		 ATTEND			
UNIT:	DECIMAL			LINEAR	ANGLES
	X.			±0.50	±5°
	X.X			±0.25	±3°
	X.XX			±0.12	±1°
m m		WWW.ATTEND.COM.TW			
DRAWN	Tim	2025/03/12	DRAWN NAME:		
CHECKED	Fros	2025/03/12	M8 A-Code Receptacle, 3Pin Male Solder Type Rear Fastened		
APPROVED	Ken	2025/03/12	PRODUCT NO. 219A-03MAR		
	SCALE 2/1	SHEET 1/1	SIZE A4		
FILE NAME		219A-03MAR_B_1			



WWW.ATTEND.COM.TW