
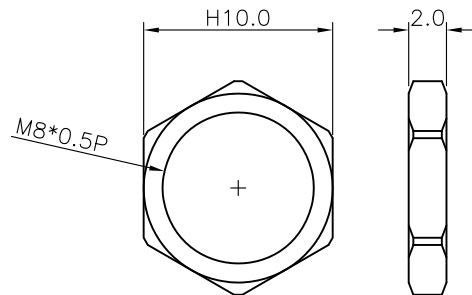



REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2022/03/14
2	ECR220421002	Fros	2022/04/21

SPECIFICATION:

1. CURRENT RATING: 3A
2. VOLTAGE: 50VAC/60VDC
3. WATER PROOF: IPX7
4. OPERATION TEMPERATURE: -40°C TO +85°C

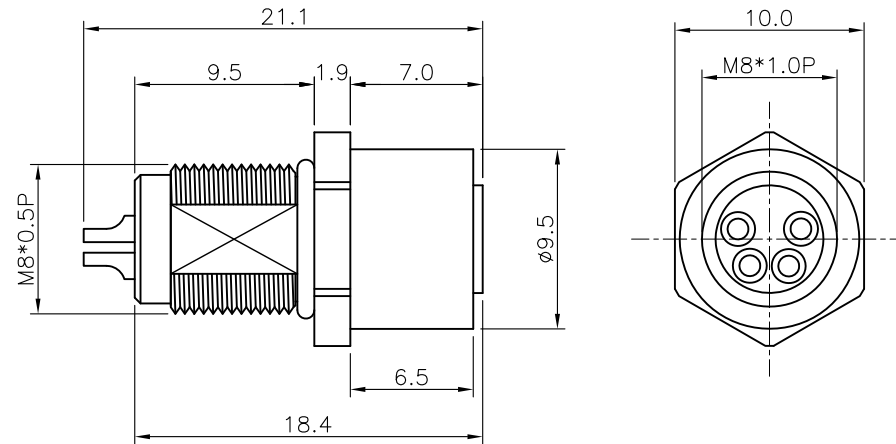

NUT




PANEL CUT


5	O-RING	EPDM, Black		
4	NUT	Brass, Nickel plated		
3	SHELL	Brass, Nickel plated		
2	CONTACT	Brass, Gold plating over Nickel		
1	HOUSING	PBT,UL94V-0,Black		
NO	PART NAME	DESCRIPTION		
UNLESS OTHERWISE SPECIFIED TOLERANCE		 ATTEND		
UNIT: mm	DECIMAL		LINEAR	ANGLES
	X.		±0.50	±5°
	X.X		±0.25	±3°
	X.XX		±0.12	±1°
www.attend.com.tw				
DRAWN	Fros	2022/03/14	DRAWN NAME: M8 A-Cocde Receptacle, 4Pin Female Solder type, Rear Fastened, G/F	
CHECKED	Tim	2022/03/14		
APPROVED	Ken	2022/03/14	PRODUCT NO.	219A-04FAR
	SCALE 2.5/1	SHEET 1/1	SIZE A4	FILE NAME 219A-04FAR_B_2




1. Wire Processing

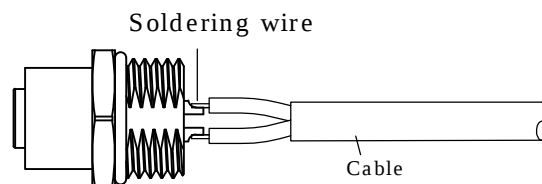

2. Installation Direction

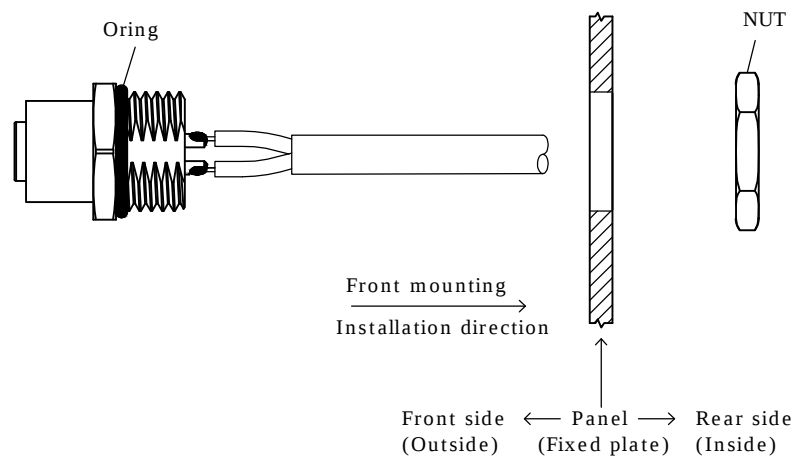

3. Connector Mated to Panel Mount

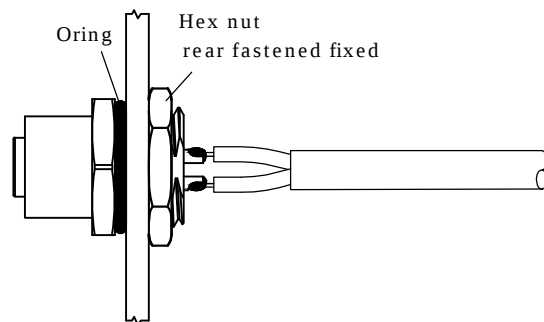

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND	
UNIT:	DECIMAL	LINEAR	ANGLES		
m m	X.	±0.50	±5°	WWW.ATTEND.COM.TW	
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
DRAWN	Tim	2025/02/25	DRAWN NAME:		
CHECKED	Fros	2025/02/25	M Series For Female Solder Type Rear Fastened		
APPROVED	Ken	2025/02/25	Design Guide		
	SCALE	SHEET 1/1	SIZE A4	PRODUCT NO.	
				FILE NAME	M Series FAR_DG