
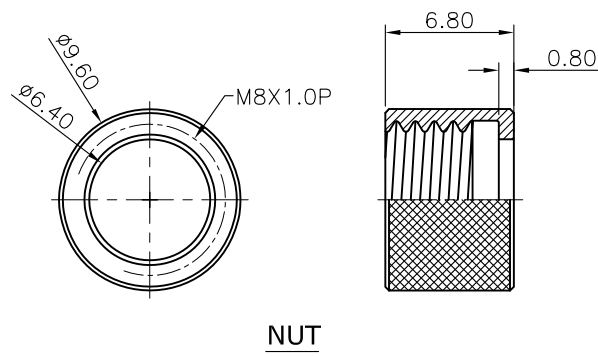
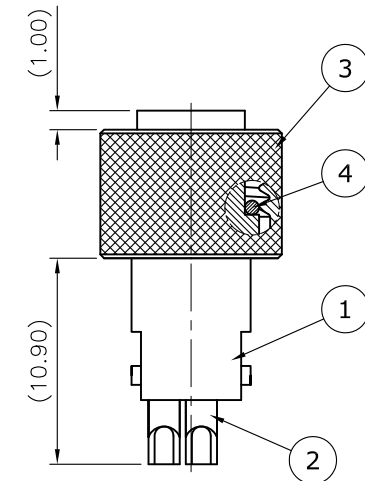



REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2016/08/15
2	ECR220421002	Fros	2022/04/21

SPECIFICATION:





1. CURRENT RATING: 3A
2. VOLTAGE: 50VAC/60VDC
3. WATER PROOF: IPX7
4. OPERATION TEMPERATURE: -40°C TO +85°C

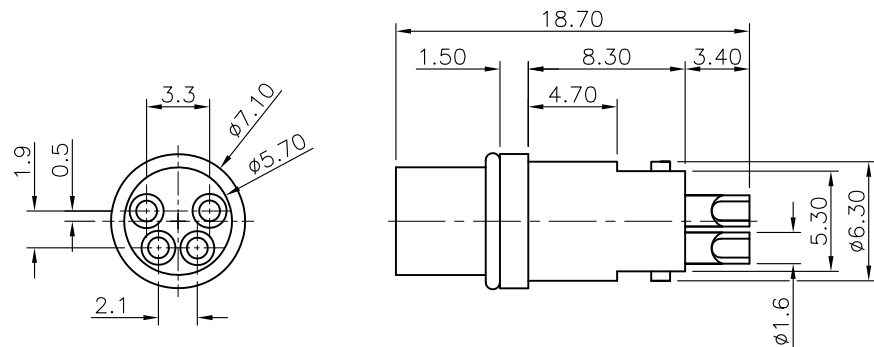

4	O-RING	NBR, Black
3	NUT	Brass, Nickel plated
2	CONTACT	Bronze, Gold plating over Nickel
1	HOUSING	PBT, UL94V-0, Black
NO	PART NAME	DESCRIPTION
UNLESS OTHERWISE SPECIFIED TOLERANCE		
UNIT:	DECIMAL	LINEAR
mm	X.	±0.50
	X.X	±0.25
	X.XX	±0.12
		±5°
		±3°
		±1°
DRAWN	Tim	2016/08/15
CHECKED	Fros	2016/08/15
APPROVED	Ken	2016/08/15
SCALE	2.5/1	SHEET 1/1
SIZE	A4	FILE NAME
DRAWN NAME: M8 A- Code Plug for Cable , 4Pin Female For Overmold with Cable		
PRODUCT NO. 219A-04FO0		
219A-04FO0_B_2		



WWW.ATTEND.COM.TW

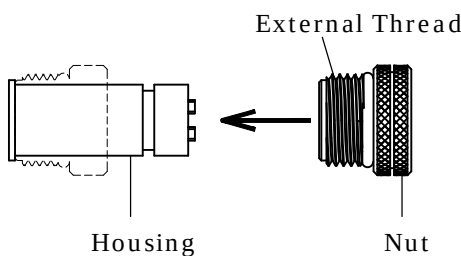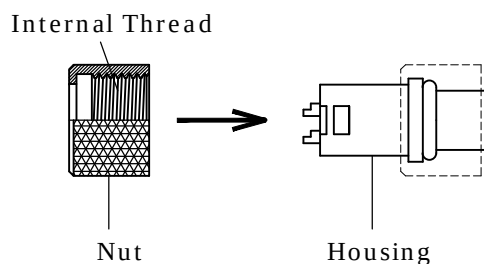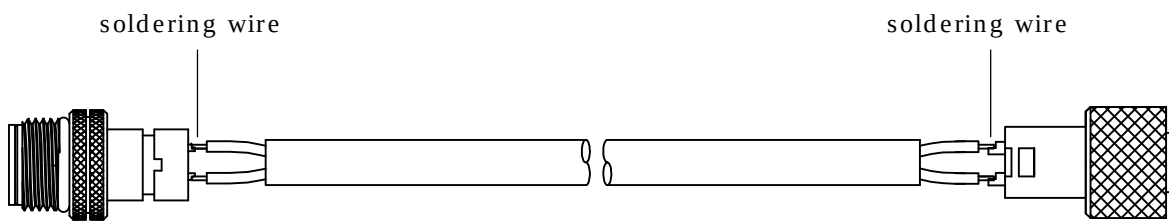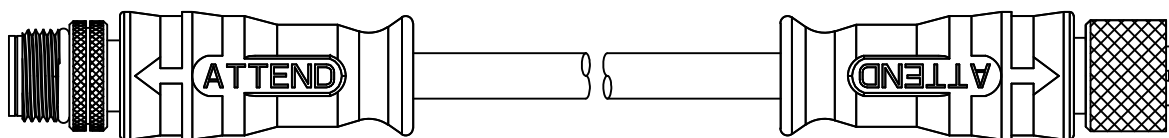							REV.	DESCRIPTION		DRAWN	DATE																																																																															
1. Setting Connector																																																																																										
																																																																																										
Male Connector						Female Connector																																																																																				
2. Wire Processing																																																																																										
																																																																																										
3. Overmolded Cable Assemblies																																																																																										
																																																																																										
<table><tr><td colspan="6">UNLESS OTHERWISE SPECIFIED TOLERANCE</td><td colspan="6" rowspan="5"> ATTEND</td></tr><tr><td colspan="2">UNIT:</td><td>DECIMAL</td><td>LINEAR</td><td colspan="2">ANGLES</td></tr><tr><td rowspan="3">m m</td><td>X.</td><td>±0.50</td><td colspan="2">±5°</td></tr><tr><td>X.X</td><td>±0.25</td><td colspan="2">±3°</td></tr><tr><td>X.XX</td><td>±0.12</td><td colspan="2">±1°</td></tr><tr><td colspan="2">DRAWN</td><td colspan="2">Tim</td><td colspan="2">2025/02/25</td><td colspan="6">DRAWN NAME: M Series For Female Cable Overmold Type Design Guide</td></tr><tr><td colspan="2">CHECKED</td><td colspan="2">Fros</td><td colspan="2">2025/02/25</td><td colspan="6"></td></tr><tr><td colspan="2">APPROVED</td><td colspan="2">Ken</td><td colspan="2">2025/02/25</td><td colspan="2">PRODUCT NO.</td><td colspan="4"></td></tr><tr><td colspan="2"></td><td>SCALE</td><td>SHEET 1/1</td><td>SIZE A4</td><td colspan="2">FILE NAME</td><td colspan="5">M Series FO0_DG</td></tr></table>												UNLESS OTHERWISE SPECIFIED TOLERANCE						 ATTEND						UNIT:		DECIMAL	LINEAR	ANGLES		m m	X.	±0.50	±5°		X.X	±0.25	±3°		X.XX	±0.12	±1°		DRAWN		Tim		2025/02/25		DRAWN NAME: M Series For Female Cable Overmold Type Design Guide						CHECKED		Fros		2025/02/25								APPROVED		Ken		2025/02/25		PRODUCT NO.								SCALE	SHEET 1/1	SIZE A4	FILE NAME		M Series FO0_DG				
UNLESS OTHERWISE SPECIFIED TOLERANCE						 ATTEND																																																																																				
UNIT:		DECIMAL	LINEAR	ANGLES																																																																																						
m m	X.	±0.50	±5°																																																																																							
	X.X	±0.25	±3°																																																																																							
	X.XX	±0.12	±1°																																																																																							
DRAWN		Tim		2025/02/25		DRAWN NAME: M Series For Female Cable Overmold Type Design Guide																																																																																				
CHECKED		Fros		2025/02/25																																																																																						
APPROVED		Ken		2025/02/25		PRODUCT NO.																																																																																				
		SCALE	SHEET 1/1	SIZE A4	FILE NAME		M Series FO0_DG																																																																																			