




REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2020/02/10
2	ECR220421002	Fros	2022/04/21

SPECIFICATION:


1. CURRENT RATING: 3A
2. VOLTAGE: 50VAC/60VDC
3. WATER PROOF: IPX7
4. OPERATION TEMPERATURE: -40°C TO +85°C

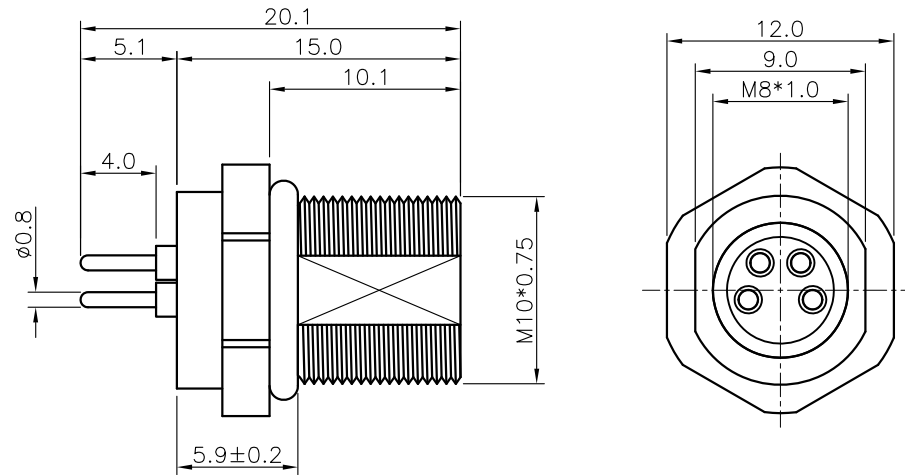

Recommended PCB layout

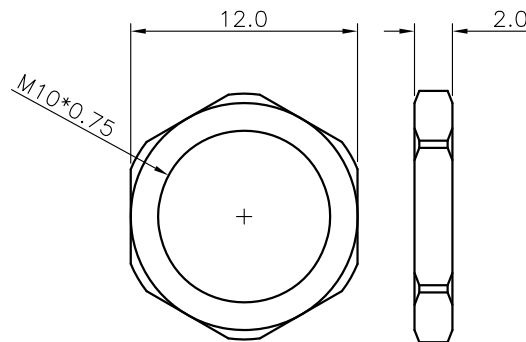

Nut




Panel cut out


6	EPOXY BASE	
5	O-RING	EPDM,BLACK
4	SHELL	BRASS, NICKEL PLATED
3	NUT	BRASS, NICKEL PLATED
2	CONTACT	BRASS,G/F UNDER NICKEL
1	HOUSING	PA66, UL94V-0, BLACK
NO	PART NAME	DESCRIPTION

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND www.attend.com.tw	
UNIT: mm	DECIMAL	LINEAR	ANGLES		
	X.	±0.50	±5°		
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
DRAWN		Fros	2020/02/10	DRAWN NAME: M8 A-Code Receptacle, 4Pin Female Straight PCB Type Front Fastened	
CHECKED		Tim	2020/02/10		
APPROVED		Ken	2020/02/10	PRODUCT NO.	219A-04FSF-01
	SCALE 2.5/1	SHEET 1/1	SIZE A4	FILE NAME	219A-04FSF-01_B_2


1. Soldering Board



2. Installation Direction

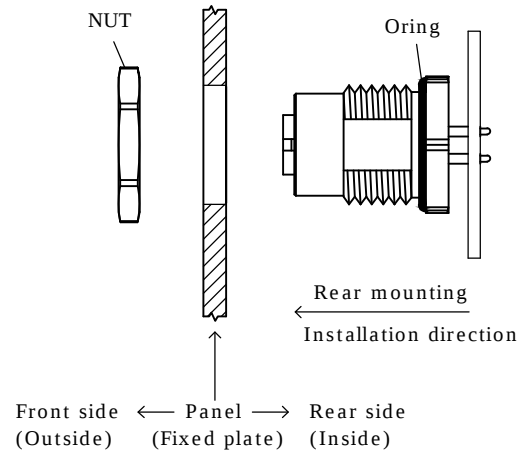

3. Connector Mated to Panel Mount

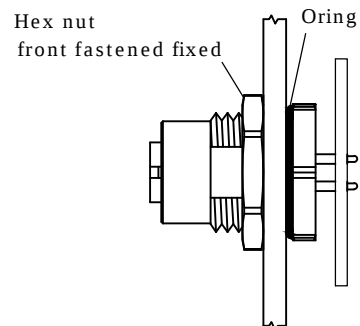

UNLESS OTHERWISE SPECIFIED TOLERANCE					
UNIT:	DECIMAL	LINEAR	ANGLES		
m m	X.	±0.50	±5°	WWW.ATTEND.COM.TW	
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
DRAWN	Tim	2025/02/25	DRAWN NAME:		
CHECKED	Fros	2025/02/25	M Series For Female DIP Type Front Fastened Design Guide		
APPROVED	Ken	2025/02/25	PRODUCT NO.		
	SCALE	SHEET 1/1	SIZE A4	FILE NAME	M Series FSF_DG