

RECOMMEND PANEL CUT OUT

RECOMMEND LAYOUT

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2016/08/19
2	ECR220421002	Fros	2022/04/21

SPECIFICATION:

1. CURRENT RATING: 3A
2. VOLTAGE: 50VAC/60VDC
3. WATER PROOF: IPX7
4. OPERATION TEMPERATURE: -40°C TO +85°C

7	EPOXY BASE	
6	O-RING	EPDM,BLACK
5	O-RING	NBR,BLACK
4	SHELL	BRASS, NICKEL PLATED
3	NUT	BRASS, NICKEL PLATED
2	CONTACT	BRASS,10u"GOLD PLATED UNDER NICKEL
1	HOUSING	PBT, UL94V-0, BLACK
NO	PART NAME	DESCRIPTION

UNLESS OTHERWISE SPECIFIED TOLERANCE


UNIT:	DECIMAL	LINEAR	ANGLES
mm	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°




WWW.ATTEND.COM.TW

DRAWN	Tim	2016/08/19	DRAWN NAME:	M8 A-Code Receptacle, 4Pin Female
CHECKED	Fros	2016/08/19		Straight PCB Type Front Fastened
APPROVED	Ken	2016/08/19	PRODUCT NO.	219A-04FSF
SCALE	2/1	SHEET	1/1	SIZE A4
FILE NAME	219A-04FSF_B_2			


1. Soldering Board





2. Installation Direction

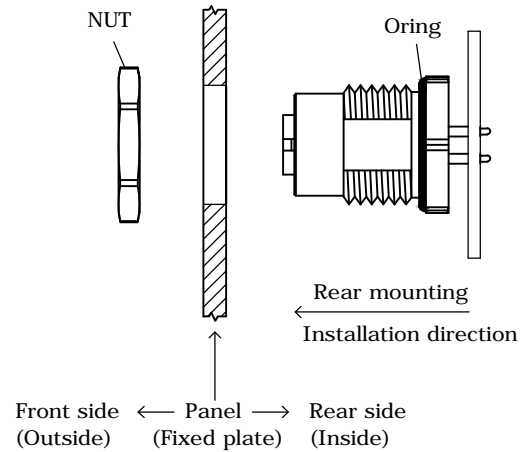

3. Connector Mated to Panel Mount

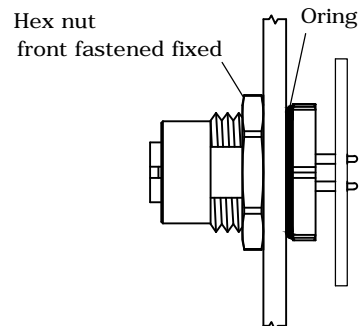

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND	
UNIT:	DECIMAL	LINEAR	ANGLES		
mm	X.	±0.50	±5°	WWW.ATTEND.COM.TW	
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
DRAWN	Tim	2025/02/25	DRAWN NAME: M Series For Female DIP Type Front Fastened Design Guide		
CHECKED	Fros	2025/02/25			
APPROVED	Ken	2025/02/25	PRODUCT NO.		
	SCALE	SHEET 1/1	SIZE A4	FILE NAME	M Series FSF_DG