


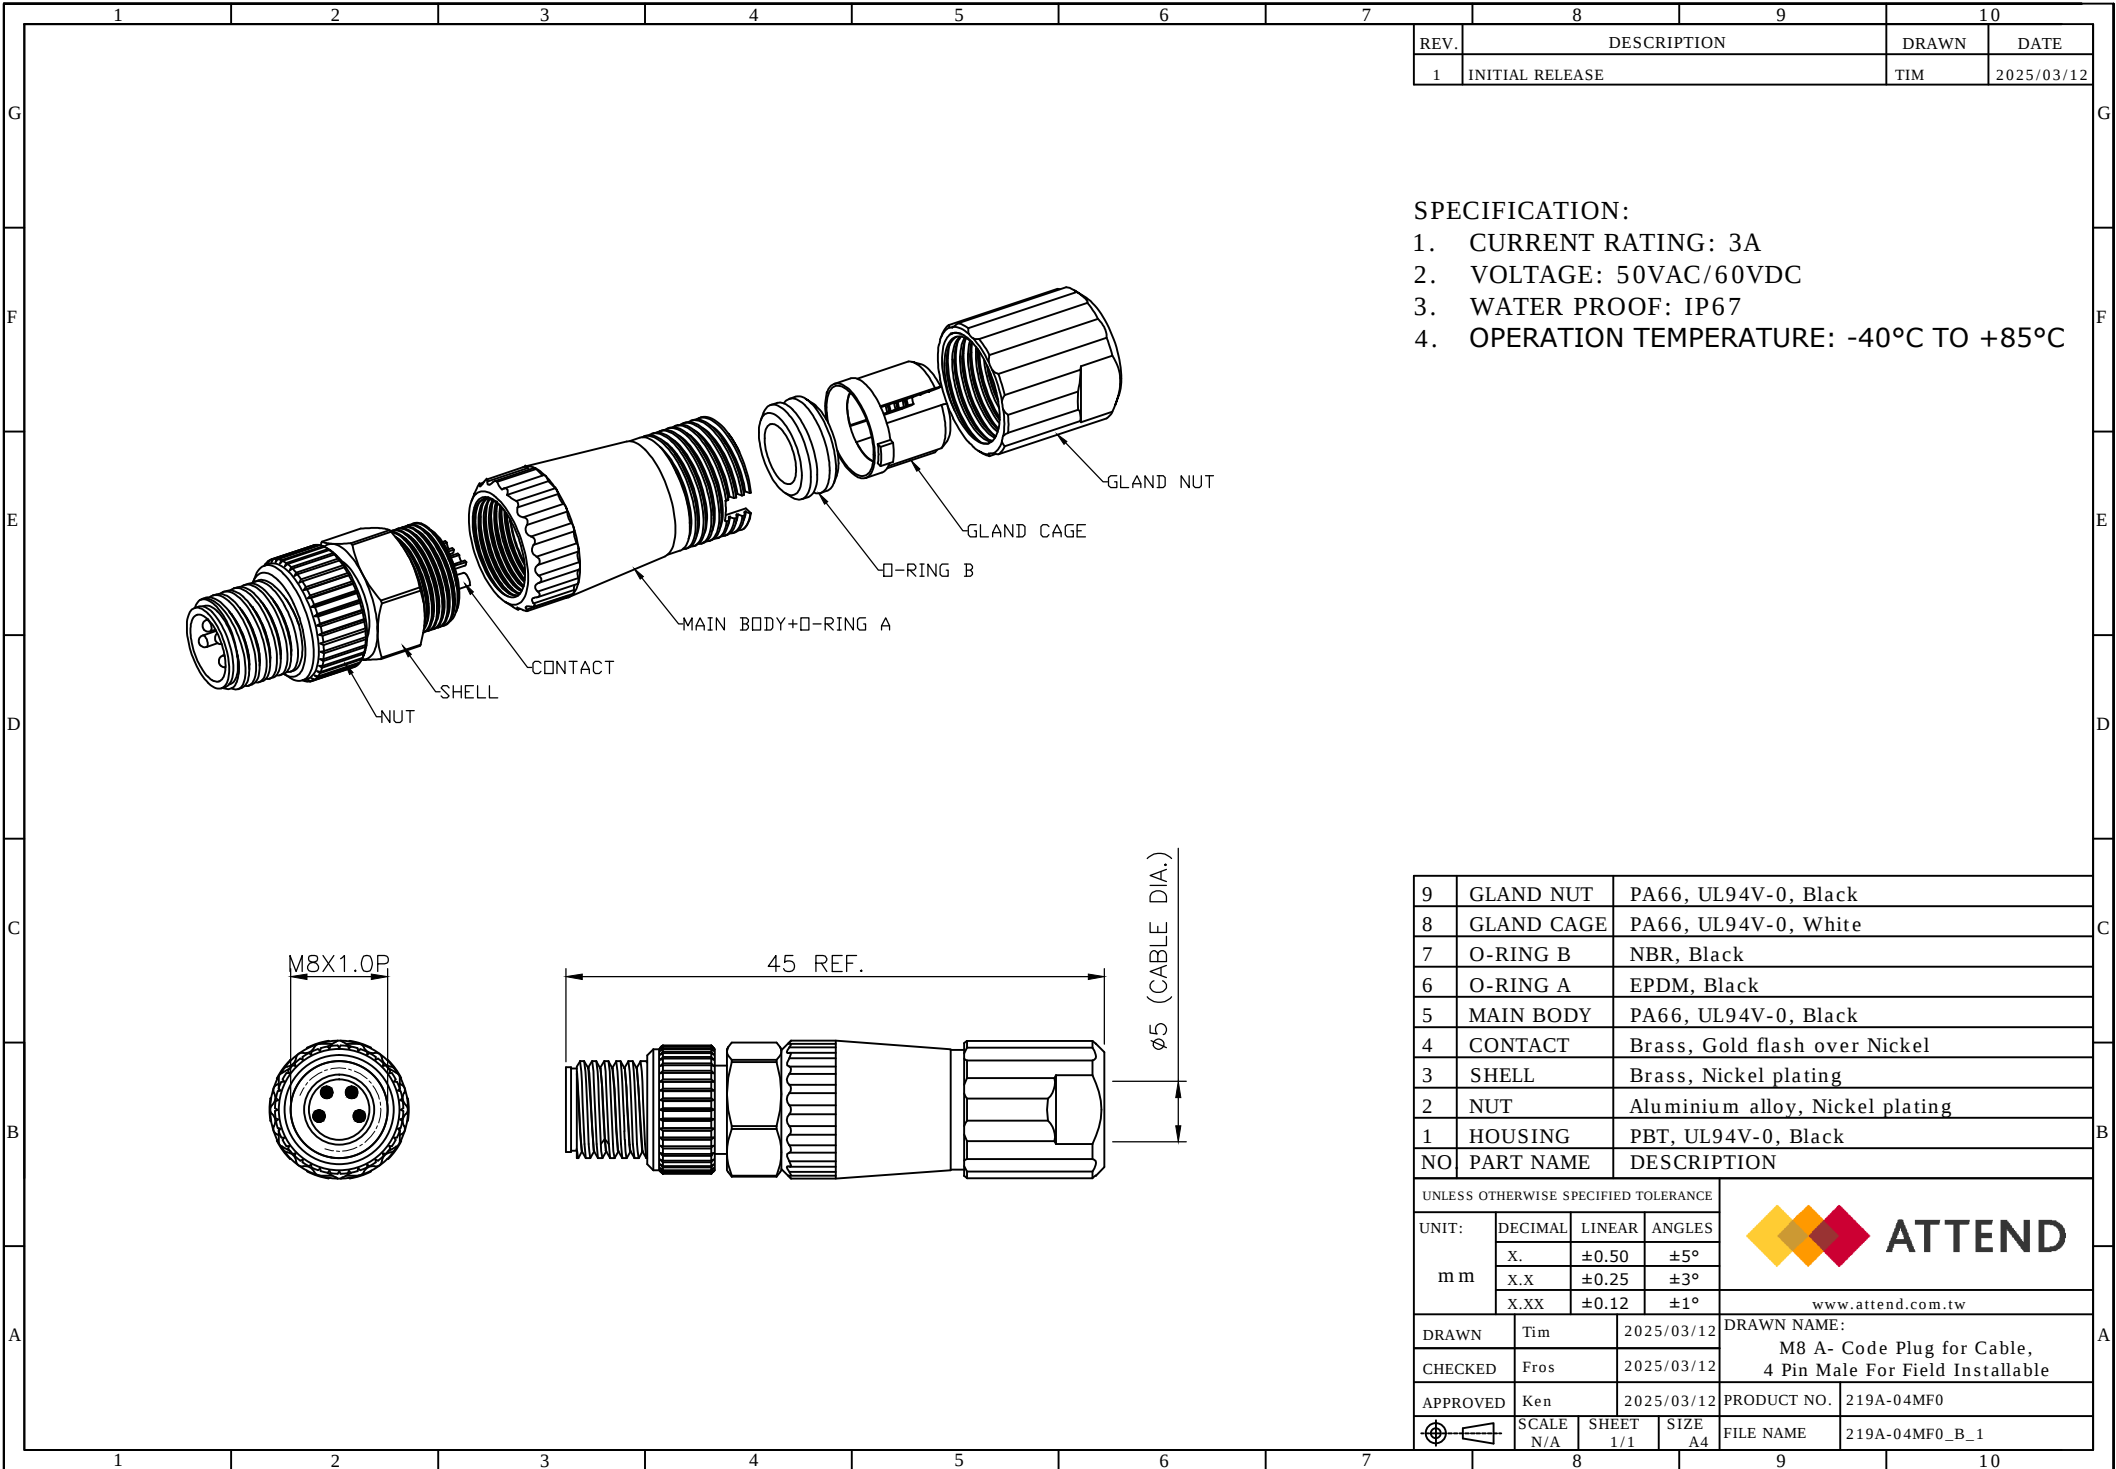

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2025/03/12

- SPECIFICATION:
- CURRENT RATING: 3A
 - VOLTAGE: 50VAC/60VDC
 - WATER PROOF: IP67
 - OPERATION TEMPERATURE: -40°C TO +85°C

9	GLAND NUT	PA66, UL94V-0, Black
8	GLAND CAGE	PA66, UL94V-0, White
7	O-RING B	NBR, Black
6	O-RING A	EPDM, Black
5	MAIN BODY	PA66, UL94V-0, Black
4	CONTACT	Brass, Gold flash over Nickel
3	SHELL	Brass, Nickel plating
2	NUT	Aluminium alloy, Nickel plating
1	HOUSING	PBT, UL94V-0, Black
NO	PART NAME	DESCRIPTION

UNLESS OTHERWISE SPECIFIED TOLERANCE					 ATTEND www.attend.com.tw	
UNIT: m m	DECIMAL	LINEAR	ANGLES			
	X.	±0.50	±5°			
	X.X	±0.25	±3°			
	X.XX	±0.12	±1°			
					www.attend.com.tw	
DRAWN	Tim		2025/03/12		DRAWN NAME: M8 A- Code Plug for Cable, 4 Pin Male For Field Installable	
CHECKED	Fros		2025/03/12			
APPROVED	Ken		2025/03/12		PRODUCT NO.	219A-04MF0
	SCALE N/A	SHEET 1/1	SIZE A4	FILE NAME	219A-04MF0_B_1	