





REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2016/08/23
2	ECR220421002	Fros	2022/04/21

SPECIFICATION:

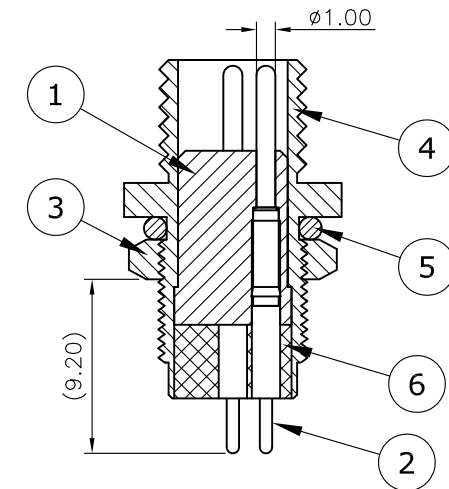

1. CURRENT RATING: 3A
2. VOLTAGE: 50VAC/60VDC
3. WATER PROOF: IPX7
4. OPERATION TEMPERATURE: -40°C TO +85°C

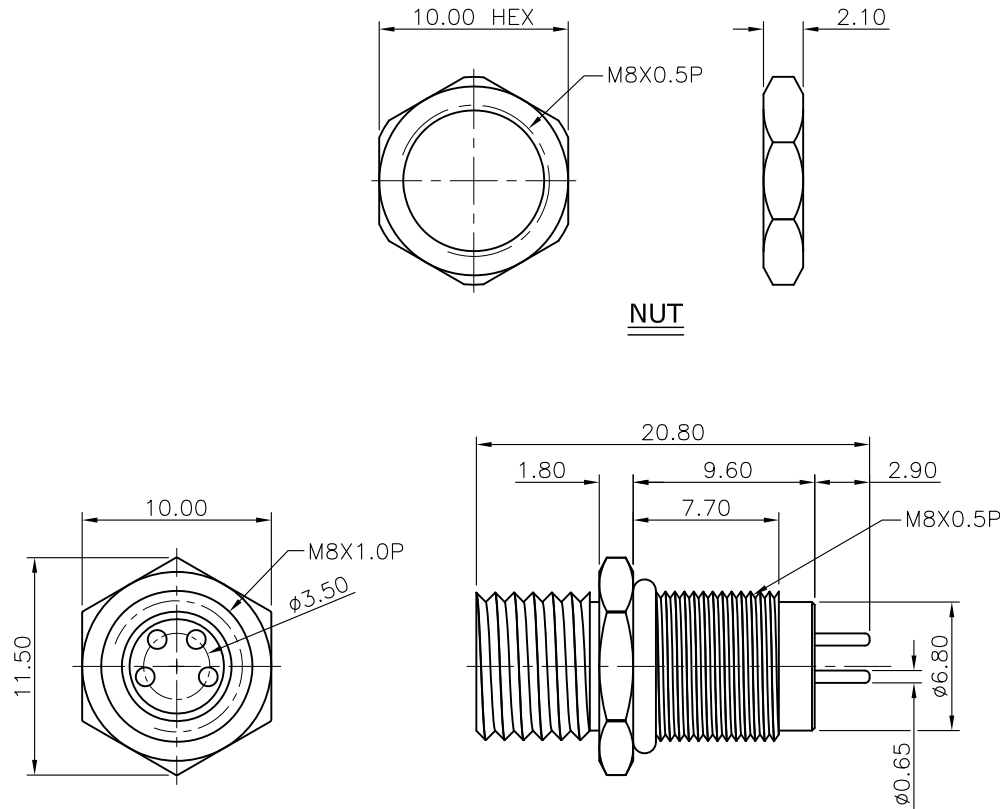

RECOMMEND PANEL CUT OUT




RECOMMEND PCB LAYOUT

6	EPOXY BASE		
5	O-RING	NBR, BLACK	
4	SHELL	BRASS, NICKEL PLATED	
3	NUT	BRASS, NICKEL PLATED	
2	CONTACT	BRASS, 10u" GOLD PLATED UNDER NICKEL	
1	HOUSING	PBT, BLACK	
NO	PART NAME	DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT:	DECIMAL	LINEAR	ANGLES
mm	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°
 ATTEND			
WWW.ATTEND.COM.TW			
DRAWN	Tim	2016/08/23	DRAWN NAME:
CHECKED	Fros	2016/08/23	M8 A-Code Receptacle, 4Pin Male Straight PCB Type, Rear Fastened
APPROVED	Ken	2016/08/23	PRODUCT NO. 219A-04MSR
	SCALE 2.5/1	SHEET 1/1	SIZE A4
FILE NAME		219A-04MSR_B_2	




WWW.ATTEND.COM.TW


1. Soldering Board





2. Installation Direction

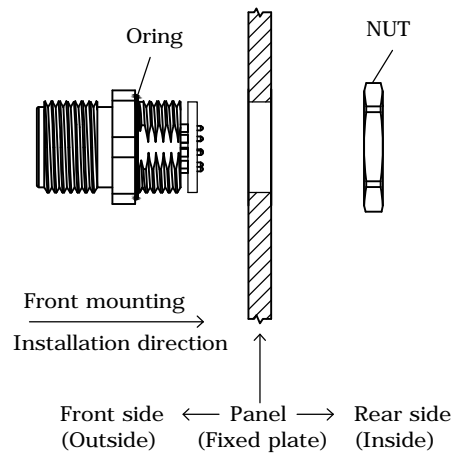

3. Connector Mated to Panel Mount

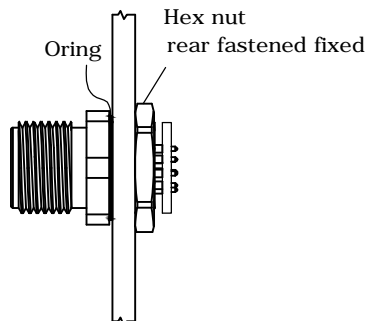

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND		
UNIT: mm	DECIMAL	LINEAR	ANGLES			
	X.	±0.50	±5°			
	X.X	±0.25	±3°			
	X.XX	±0.12	±1°			
				WWW.ATTEND.COM.TW		
DRAWN	Tim	2025/02/25	DRAWN NAME: M Series For Male DIP Type Rear Fastened Design Guide			
CHECKED	Fros	2025/02/25				
APPROVED	Ken	2025/02/25	PRODUCT NO.			
	SCALE	SHEET 1/1	SIZE A4	FILE NAME	M Series MSR_DG	