


REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	Fros	2018/10/29

SPECIFICATION:

1. ELECTRICAL
 - 1.1 Current Rating: 1.5A
 - 1.2 Voltage Rating: 30V
 - 1.3 Water Proof: IP67
 - 1.4 Operating Temperature: -40°C~+105°C

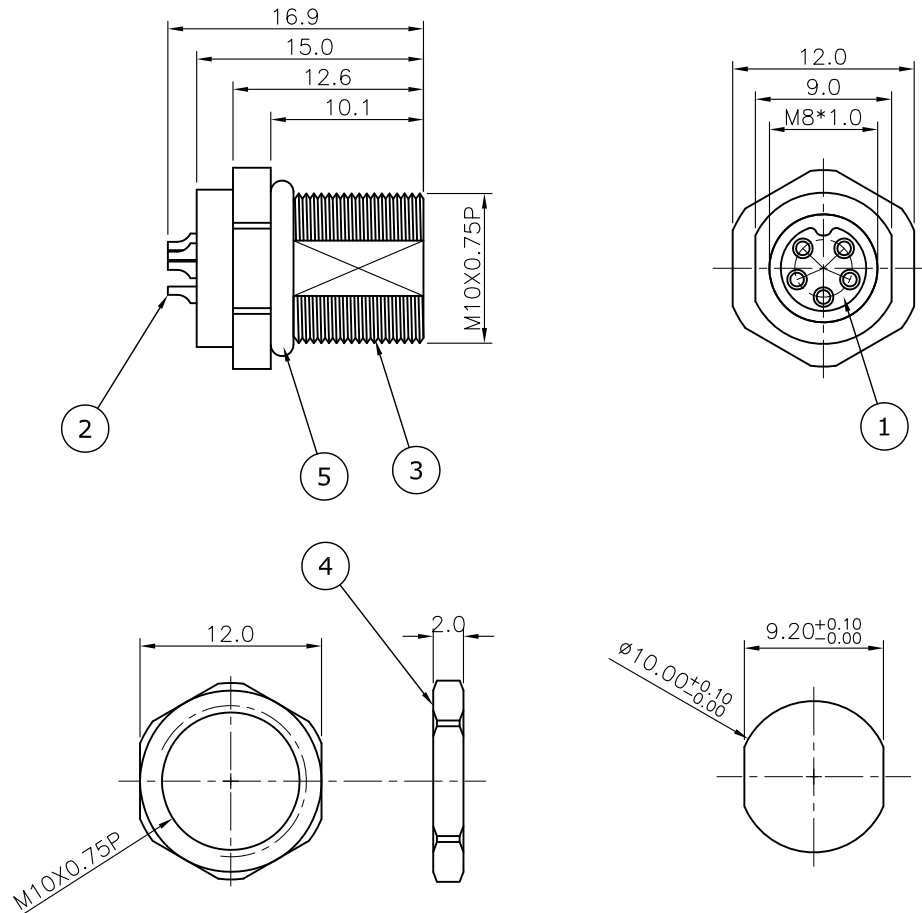

NUT


RECOMMEND PANEL CUT OUT

6	EPOXY BASE			
5	O-RING	EPDM, black		
4	NUT	Brass, nickel plating		
3	SHELL	Brass, nickel plating		
2	CONTACT	Brass, gold flash plating under nickel		
1	HOUSING	PA66, black		
NO. PART NAME		DESCRIPTION		
UNLESS OTHERWISE SPECIFIED TOLERANCE				
UNIT:	DECIMAL	LINEAR	ANGLES	
mm	X.	±0.50	±5°	
	X.X	±0.25	±3°	
	X.XX	±0.12	±1°	
			 ATTEND	
			WWW.ATTEND.COM.TW	
DRAWN	Fros	2018/10/29	DRAWN NAME: M8 A- Code Receptacle, 5Pin Female Solder Type, Front Fastened	
CHECKED	Tim	2018/10/29		
APPROVED	Ken	2018/10/29		
PRODUCT NO.		219A-05FAF		
	SCALE 2/1	SHEET 1/1	SIZE A4	FILE NAME 219A-05FAF_B_1




WWW.ATTEND.COM.TW


1. Wire Processing

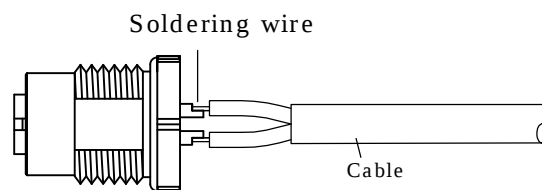

2. Installation Direction

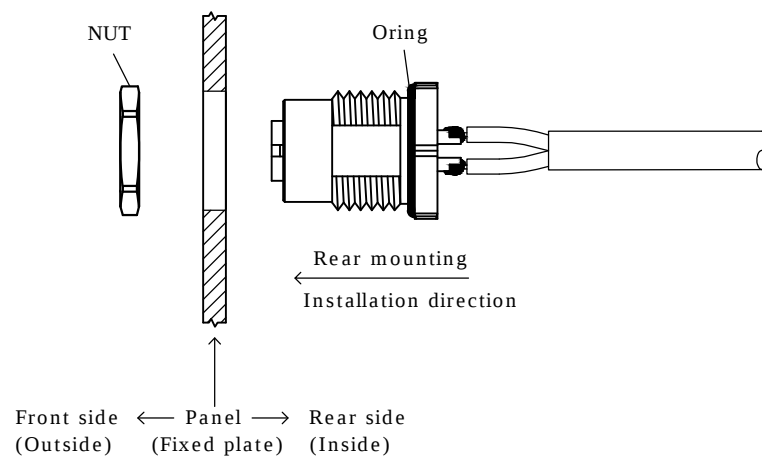

3. Connector Mated to Panel Mount

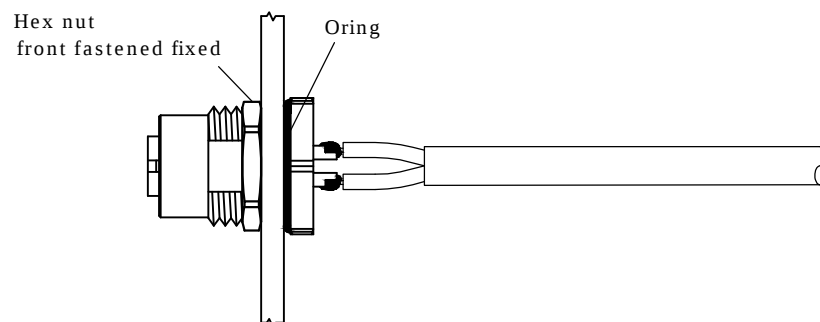

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND	
UNIT:	DECIMAL	LINEAR	ANGLES		
m m	X.	±0.50	±5°	WWW.ATTEND.COM.TW	
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
DRAWN	Tim	2025/02/25	DRAWN NAME:		
CHECKED	Fros	2025/02/25	M Series For Female Solder Type Front Fastener Design Guide		
APPROVED	Ken	2025/02/25	PRODUCT NO.		
	SCALE	SHEET 1/1	SIZE A4	FILE NAME	M Series FAF_DG